


PBS-HW-CON-01 Module host connector - Sheet 2 of 2: mating heights and sequence

Heights along z from the mating plane P (z = 0, where the module face rests when seated). Positive z points out of the bay towards the module. Dimensions in mm; heights ±0.05 unless stated.

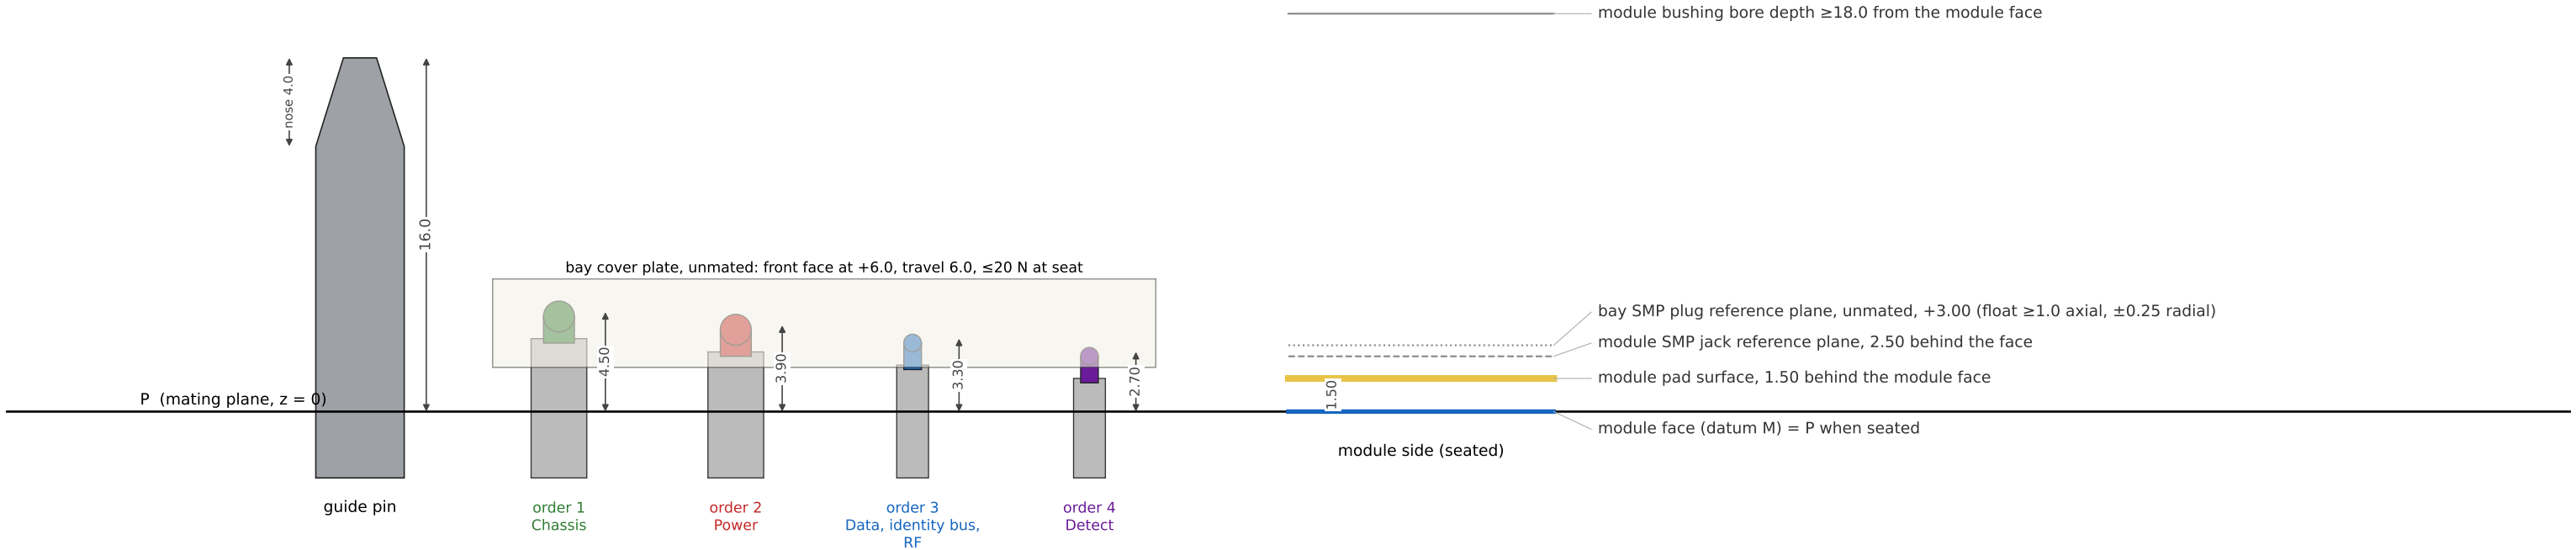

Event on insertion	Module face above P	Compression at seat
Guide pins enter bushings	16.0	-
Module face meets cover plate	6.0	-
Order 1 makes (chassis)	3.0	3.0
Order 2 makes (power)	2.4	2.4
Order 3 makes (data, identity bus, rf)	1.8	1.8
Order 4 makes (detect)	1.2	1.2
Seated (latch holds face ≤0.2 above P)	0.0	-

Removal breaks in reverse order: detect first, chassis last. Groups are 0.6 apart: at the maximum insertion speed of 100 mm/s each group leads the next by ≥6 ms. Bay spring contacts: working stroke ≥3.5.

Contact force at seat: power 1.5-3.0 N, signal 0.5-1.2 N. Insertion force ≤60 N; separating force at seat ≤60 N.

Module SMP jack is fixed; bay SMP plug floats ±0.25 radial and ≥1.0 axial, compressed 0.5 ±0.3 at seat.