


PBS-HW-CON-01 Module host connector - Sheet 1 of 2: contact faces


Dimensions in mm. Positions are true position ±0.05 relative to datum A (guide-pin A axis) and datum B (line A→B), in the frame of Section 4. Open reference design, Pale Blue Systems Foundation, v0.3, 2026-10-08.

BAY HALF - viewed from the module side (looking −z into the bay)

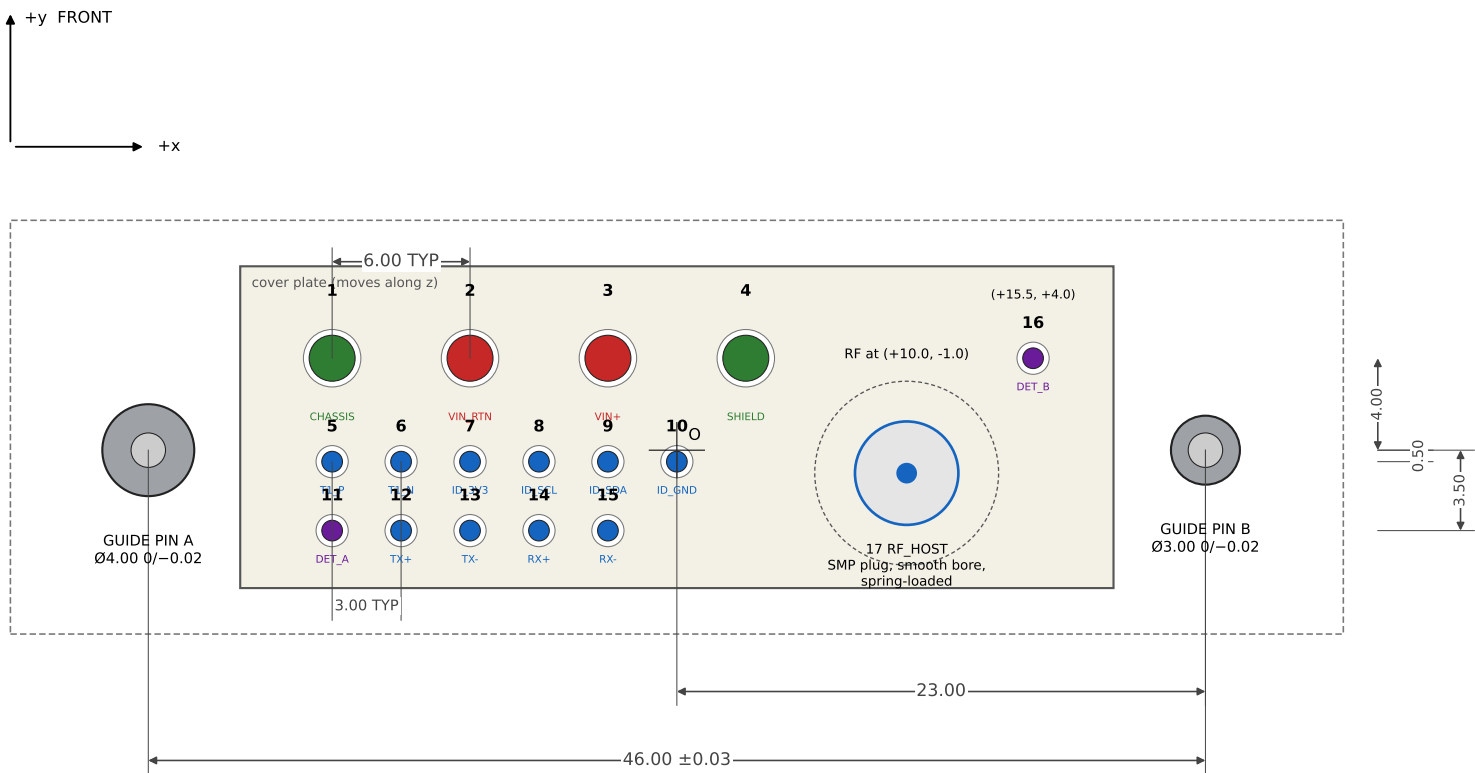

No.	Name	Group	Order	x	y	Class
1	CHASSIS	Chassis	1	-15.0	+4.0	power
2	VIN_RTN	Power	2	-9.0	+4.0	power
3	VIN+	Power	2	-3.0	+4.0	power
4	SHIELD	Chassis	1	+3.0	+4.0	power
5	T1_P	Data	3	-15.0	-0.5	signal
6	T1_N	Data	3	-12.0	-0.5	signal
7	ID_3V3	Identity bus	3	-9.0	-0.5	signal
8	ID_SCL	Identity bus	3	-6.0	-0.5	signal
9	ID_SDA	Identity bus	3	-3.0	-0.5	signal
10	ID_GND	Identity bus	3	+0.0	-0.5	signal
11	DET_A	Detect	4	-15.0	-3.5	signal
12	TX+	Fallback	3	-12.0	-3.5	signal
13	TX-	Fallback	3	-9.0	-3.5	signal
14	RX+	Fallback	3	-6.0	-3.5	signal
15	RX-	Fallback	3	-3.0	-3.5	signal
16	DET_B	Detect	4	+15.5	+4.0	signal
17	RF_HOST	RF	3	+10.0	-1.0	rf

MODULE HALF - viewed from outside the module (looking +z at its connector face); x appears mirrored

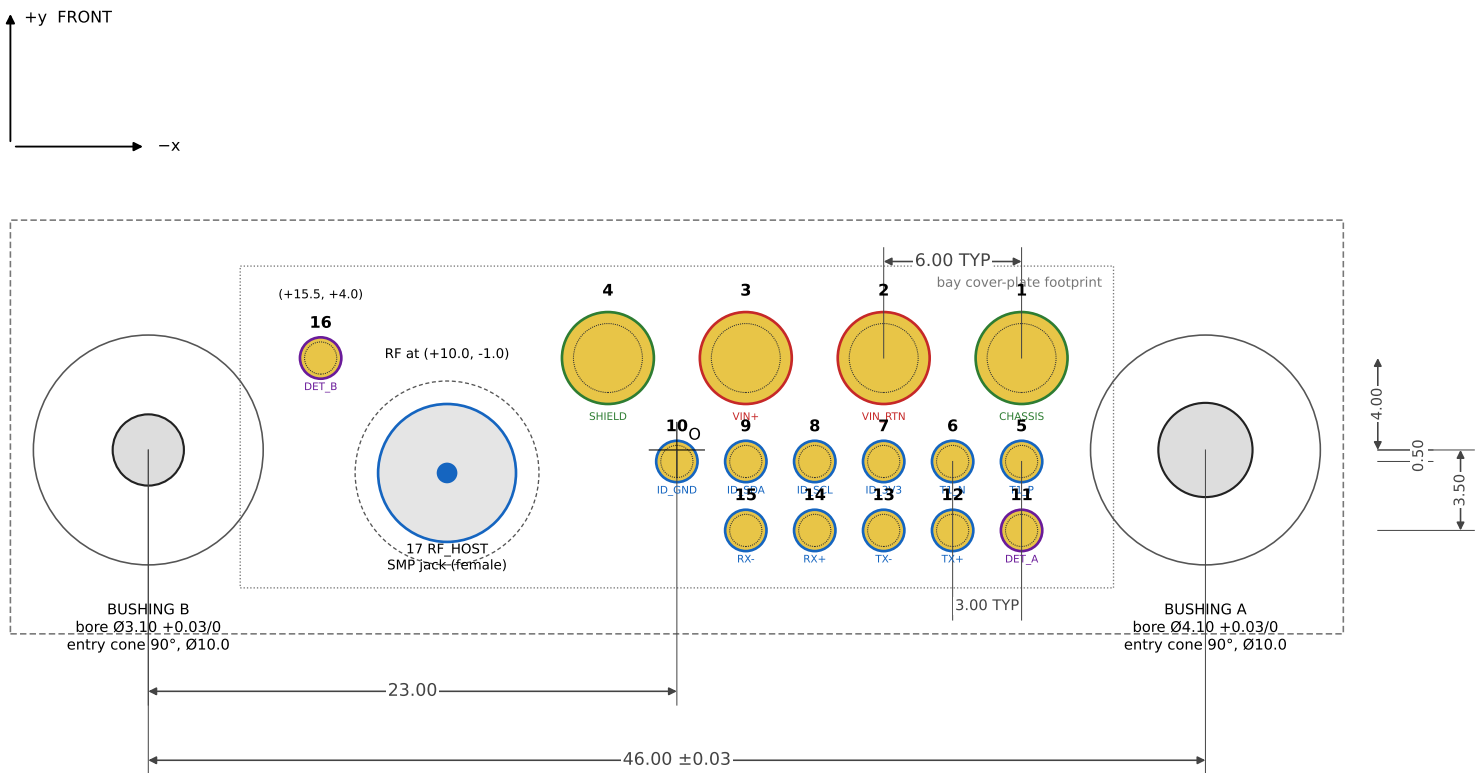

CONTACT CLASSES
power: module pad Ø4.00 flat; bay tip Ø2.00 domed; ≥5 A
signal: module pad Ø1.80 flat; bay tip Ø0.90 domed; ≥1 A
rf: SMP interface (MIL-STD-348), 50 Ω; SCM-S: aperture only
module-face apertures: power Ø3.00, signal Ø1.40, rf Ø6.00 (min)

MATING ORDER (colour)
1 chassis 2 power 3 data, identity bus, RF 4 detect
Set by bay spring-contact free height; see Sheet 2.

KEYING
Guide pin A Ø4.00 and B Ø3.00: a module turned 180° cannot enter. DET_A and DET_B sit at opposite corners so a tilted module cannot close the detect loop.

KEEP-OUTS
Dashed outline: connector face, x −29...+29, y −8...+10.
Module: nothing protrudes beyond the face in this area.
Bay: nothing above P except the cover plate and guide pins.