



Atomic SPK Base

SKU:A098



Description

Atomic SPK Base is an audio player designed for the ATOM series controllers. It is equipped with the NS4168 power amplifier chip featuring an I2S digital audio interface, with automatic sampling rate detection, adaptive function, and effective prevention of audio signal distortion. It integrates a microSD card slot for convenient storage and reading of audio files. It provides a 3.5mm headphone jack and an external speaker interface, allowing users to play audio through external headphones or speakers.

Features

- Power amplifier chip NS4168
- I2S serial digital audio input interface
- Supports wide-range sampling rate: 8kHz ~ 96kHz
- Automatic sampling rate detection and adaptive function
- microSD Card slot
- Headphone jack
- Speaker interface

Includes

- 1 x Atomic SPK Base
- 1 x 1W@8Ω Speaker

Applications

- Audio player
- Wireless speaker
- Wi-Fi speaker


Specifications

Specification	Parameter
Amplifier Chip	NS4168
Amplifier Output	1W (VDD=3.3V)
Headphone Jack	3.5mm
Speaker Interface	1.25mm-2P
Speaker Power	1W@8Ω
Product Size	24.0 x 48.0 x 18.0mm
Product Weight	12.3g
Package Size	136.0 x 92.0 x 8.0mm
Gross Weight	14.4g

Schematics



Model Size

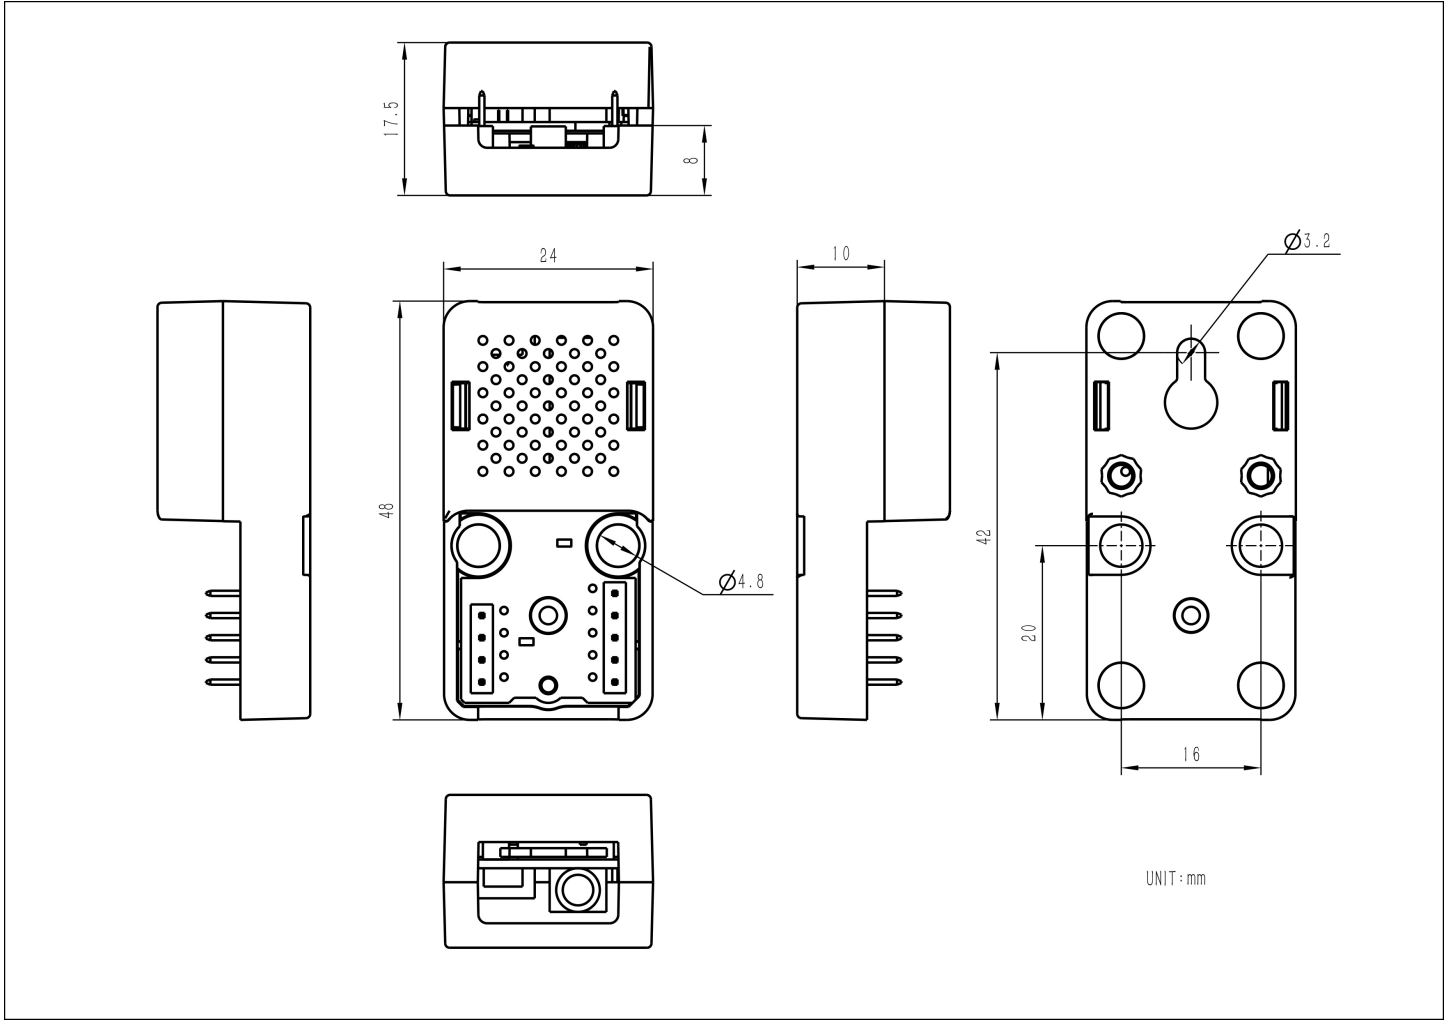

Datasheets

- [NS4168](#)

Softwares

Arduino

- [Atomic SPK Base Play RawPCM Example](#)
- [Atomic SPK Base Play MP3 From microSD Card Example](#)
- [Atomic SPK Base Arduino Quick Start](#)

UiFlow1

- [Atomic SPK Base UiFlow1 Docs](#)

UiFlow2

- [Atomic SPK Base UiFlow2 Docs](#)

EasyLoader

Easyloader	Download	Note
Atomic SPK Base Easyloader	download	/

| Video

ATOM_SPK_VIDEO.mp4