


Networking Lab 5

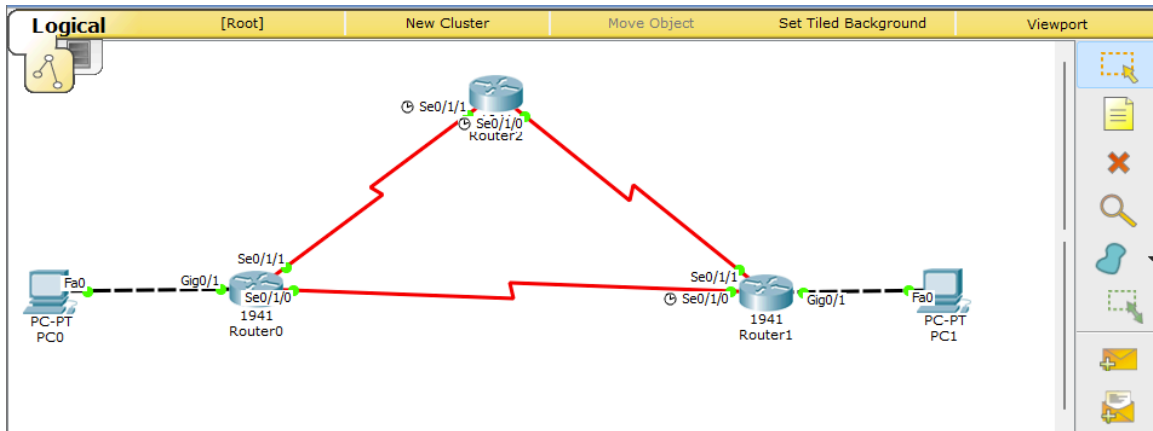

PC0

- **IP Address:** 10.0.0.2
- **Subnet Mask:** 255.0.0.0
- **Default Gateway:** 10.0.0.1

PC1

- **IP Address:** 20.0.0.2
- **Subnet Mask:** 255.255.255.252
- **Default Gateway:** 20.0.0.1

Router 0

```
enable
configure terminal
interface GigabitEthernet0/1
```

```
ip address 10.0.0.1 255.0.0.0
no shutdown
exit
interface Serial0/1/0
ip address 192.168.1.249 255.255.255.252
clock rate 64000
bandwidth 64
no shutdown
exit
interface Serial0/1/1
ip address 192.168.1.254 255.255.255.252
clock rate 64000
bandwidth 64
no shutdown
exit
router rip
network 10.0.0.0
network 192.168.1.248
network 192.168.1.252
end
```

Router 1

```
enable
configure terminal
interface GigabitEthernet0/1
ip address 20.0.0.1 255.255.255.252
no shutdown
exit
interface Serial0/1/0
ip address 192.168.1.250 255.255.255.252
no shutdown
exit
interface Serial0/1/1
ip address 192.168.1.245 255.255.255.252
```

```
no shutdown
exit
router rip
network 20.0.0.0
network 192.168.1.244
network 192.168.1.248
end
```

Router 2

```
enable
configure terminal
interface Serial0/1/1
ip address 192.168.1.253 255.255.255.252
no shutdown
exit
interface Serial0/1/0
ip address 192.168.1.246 255.255.255.252
clock rate 64000
bandwidth 64
no shutdown
exit
router rip
network 192.168.1.244
network 192.168.1.252
end
```

Router0

Physical Config CLI

IOS Command Line Interface

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/1/0, changed state to up

%LINK-5-CHANGED: Interface Serial0/1/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/1/1, changed state to up

Router#
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
       i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter area
       * - candidate default, U - per-user static route, o - ODR
       P - periodic downloaded static route

Gateway of last resort is not set

    10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       10.0.0.0/8 is directly connected, GigabitEthernet0/1
L       10.0.0.1/32 is directly connected, GigabitEthernet0/1
R       20.0.0.0/8 [120/1] via 192.168.1.250, 00:00:05, Serial0/1/0
    192.168.1.0/24 is variably subnetted, 5 subnets, 2 masks
R       192.168.1.244/30 [120/1] via 192.168.1.250, 00:00:05, Serial0/1/0
        [120/1] via 192.168.1.253, 00:00:20, Serial0/1/1
C       192.168.1.248/30 is directly connected, Serial0/1/0
L       192.168.1.249/32 is directly connected, Serial0/1/0
C       192.168.1.252/30 is directly connected, Serial0/1/1
L       192.168.1.254/32 is directly connected, Serial0/1/1
Router#
```

Copy Paste

