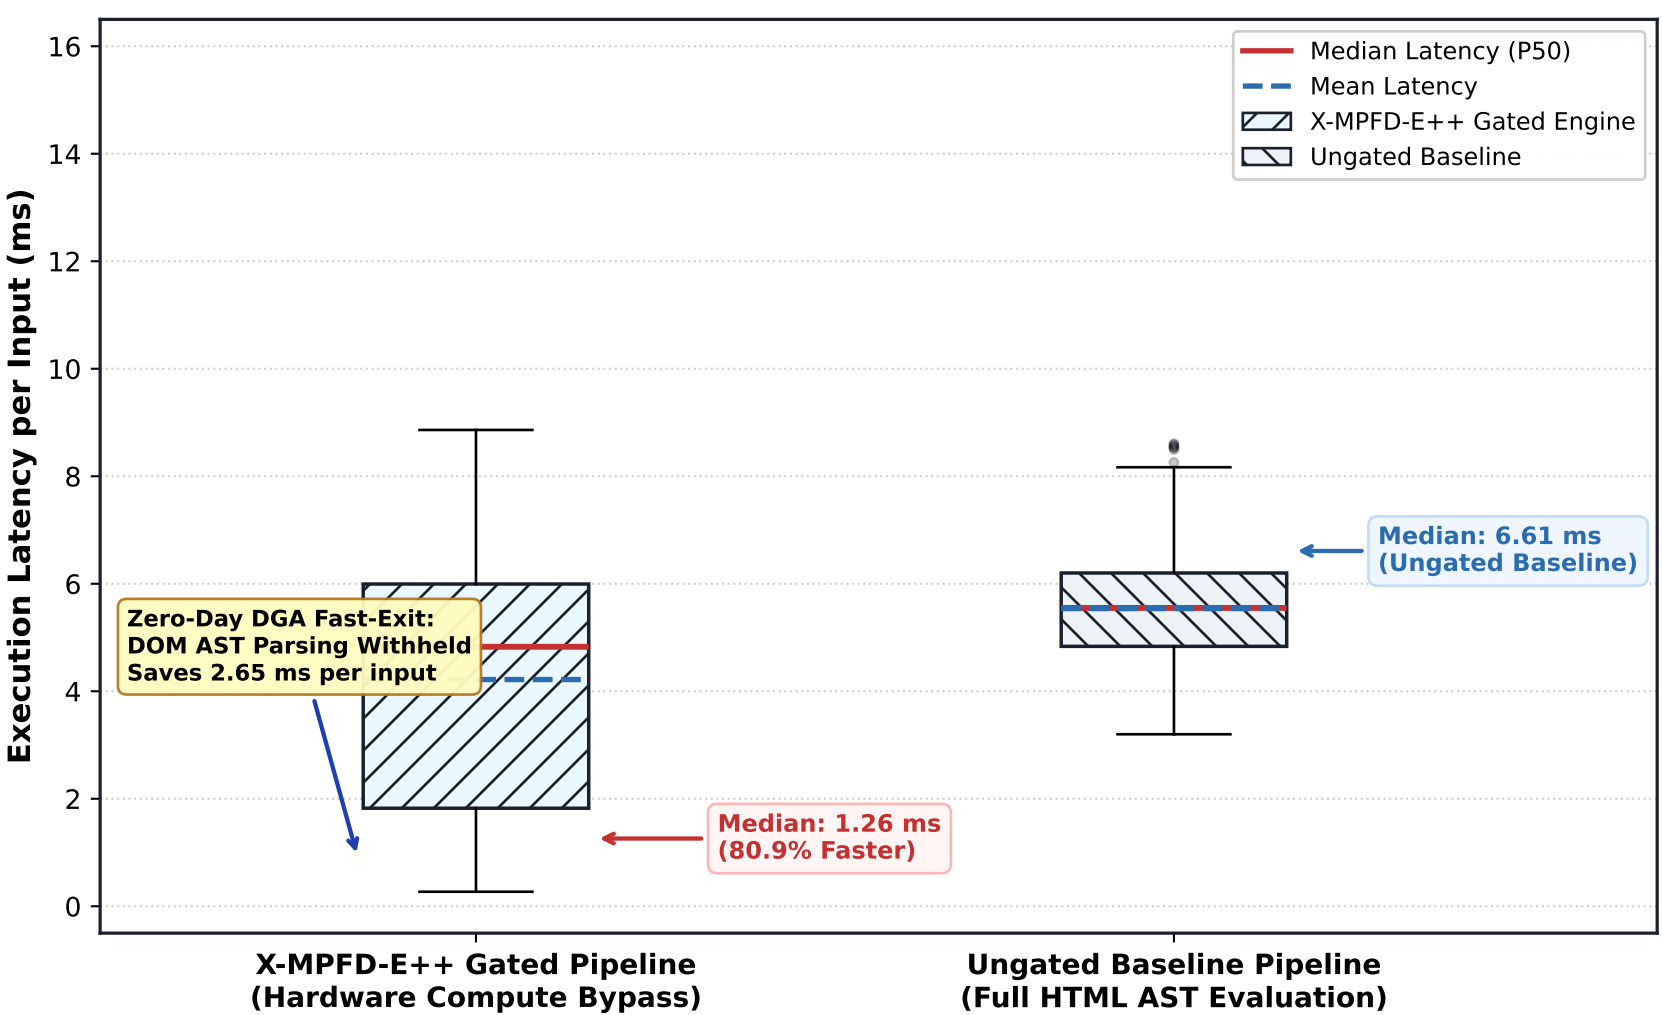
FIG. 1: Telemetry Latency Distribution Across 1,000 Inputs
Section 10(4) Empirical Hardware Verification
Execution Latency per Input (ms)
0
2
4
6
8
10
12
14
16
Median Latency (P50)
Mean Latency
X-MPFD-E++ Gated Engine
Ungated Baseline
Zero-Day DGA Fast-Exit:
DOM AST Parsing Withheld
Saves 2.65 ms per input
Median: 1.26 ms
(80.9% Faster)
Median: 6.61 ms
(Ungated Baseline)
X-MPFD-E++ Gated Pipeline
(Hardware Compute Bypass)
Ungated Baseline Pipeline
(Full HTML AST Evaluation)