

Inductive Sensors

Analogue Output-W40



Descriptions

Rectangular housing, current or voltage output, function display LED, degree of protection IP67

Features


- Varied output
- Unified voltage supply
- Current output 4-20mA, on request

Technical Data

Type	Rated operating distance Sn	Mounting	Output function	Output type	Voltage range UB	Output	Linearity	Ambient temperature	Connection	Mechanical drawing
Ni25-W40-LIU-Q12	5-25mm	non flush	analogue	voltage/current	15...30VDC	0...10VDC/0...20VDC	≤3%	-25...70°C	M12 connector	1

Connection Diagram

Connector

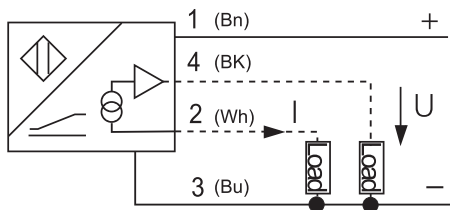

Analogue Output-W40

Mechanical Drawing

Drawing 1

