BHAVAN'S COLLEGE AUTONOMOUS, ANDHERI-WEST
PRACTICAL JOURNAL

Class: TYIT **Sem: VI** **Roll No.: TYIT30** **Date: 10-12-2025**

Course Name: Cybersphere and Security(CSS) **Page no:**

Practical Number:- 2A

Q. Configure Routers: OSPF MD5 Authentication.

1st Steps: Setup

1. Open the Cisco packet
2. Add the three routers of 1941 (R1, R2, R3) place it like triangle.
3. Click on each router (R1, R2, R3) → Go to the "Physical" tab → Turn off the router → Drag and drop the "HWIC-2T" module into an empty slot → Turn the router back on → Repeat for all routers.

4. Take two 2960-24TT Switches → two servers → one PC and give it names as shown.

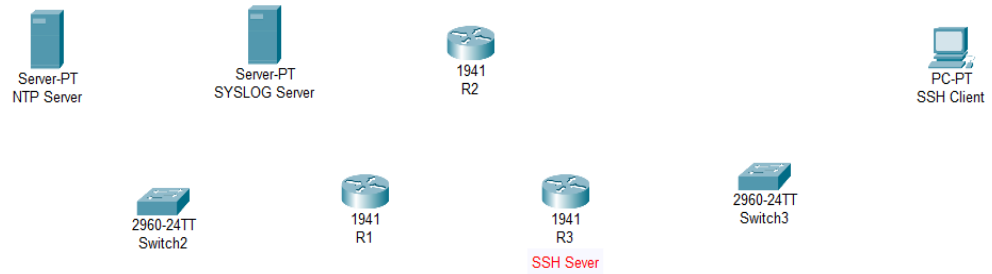

5. Connect the serial DTE wire to the router.

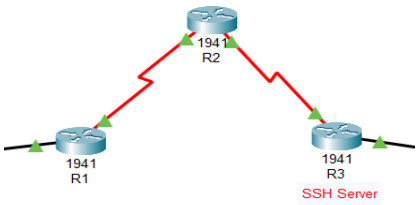

6. Connect the copper straight-through wire to devices as shown below.

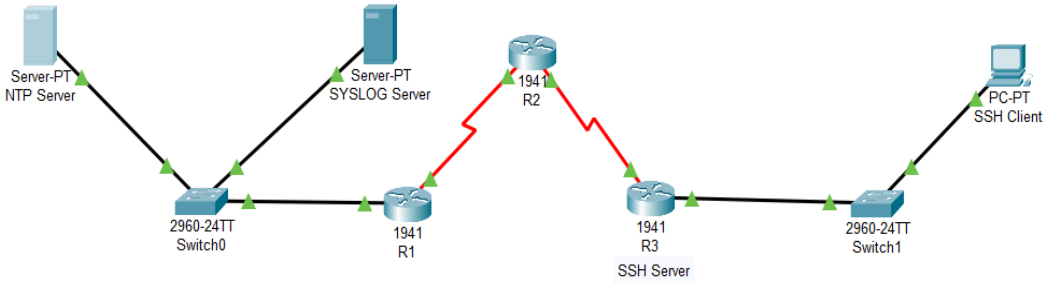

Teacher's Signature

BHAVAN'S COLLEGE AUTONOMOUS, ANDHERI-WEST
PRACTICAL JOURNAL

Class: TYIT **Sem: VI** **Roll No.: TYIT30** **Date: 10-12-2025**

Course Name: Cybersphere and Security(CSS) **Page no:**

Practical Number:- 2A

7. Click on R1 and give addresses and on port status as shown, then close the tap.

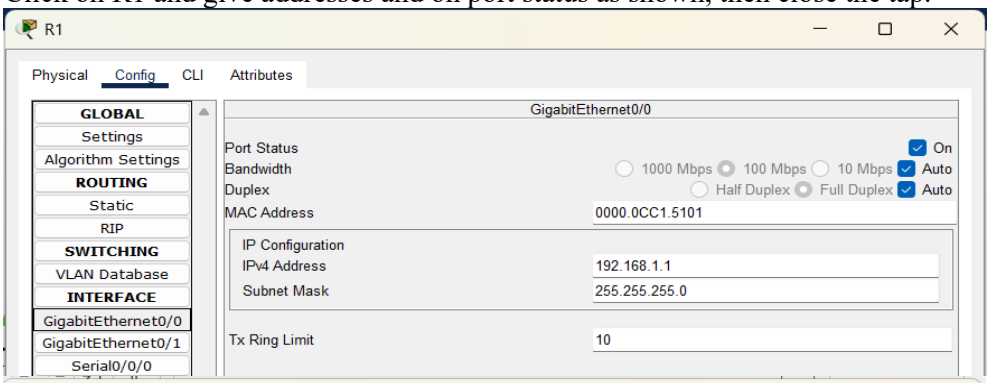

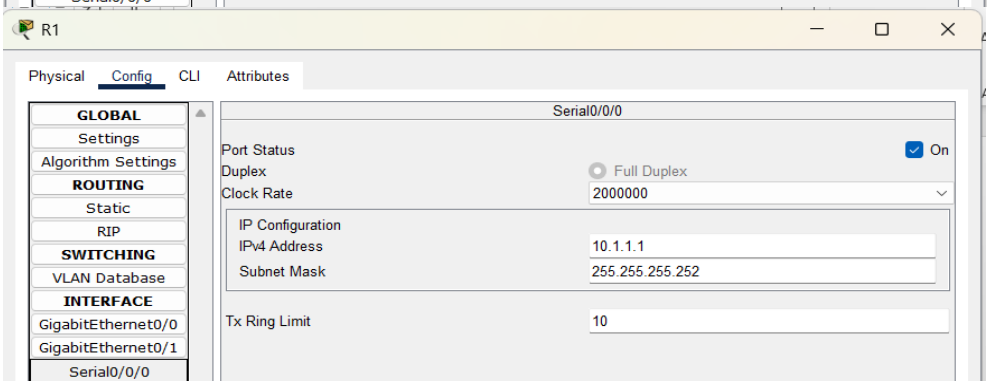

8. Click on NTP Server → desktop → IP configuration → assign addresses as given and close.

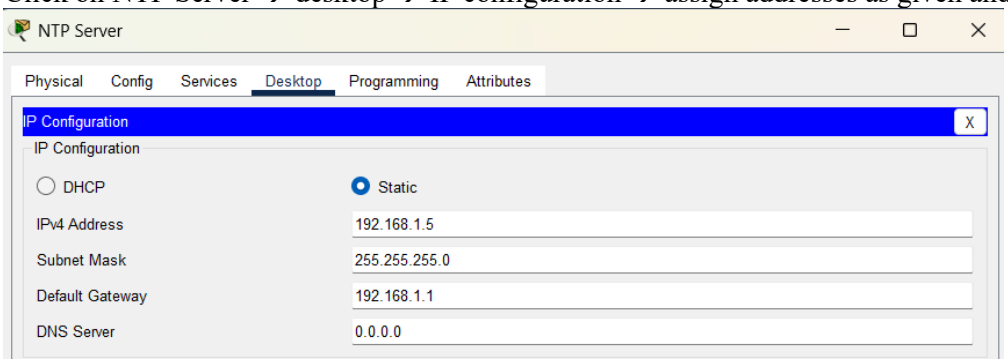

9. Click on SYSLOG Server → desktop → IP configuration → assign addresses as given and close.

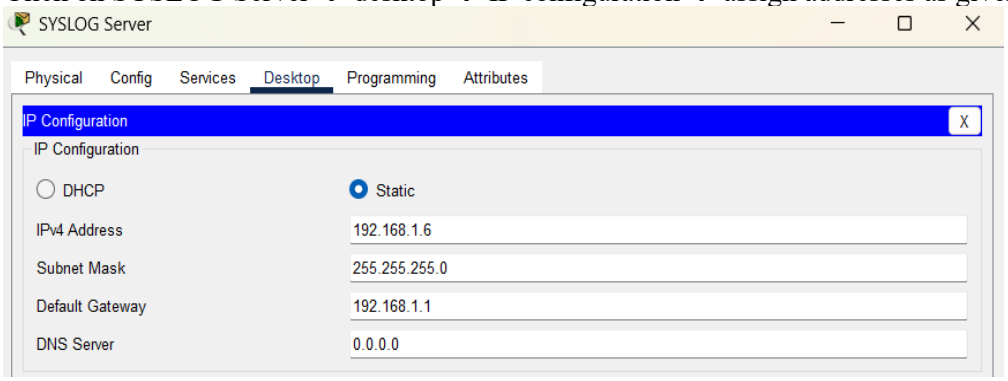

Teacher's Signature

BHAVAN'S COLLEGE AUTONOMOUS, ANDHERI-WEST
PRACTICAL JOURNAL

Class: TYIT **Sem: VI** **Roll No.: TYIT30** **Date: 10-12-2025**

Course Name: Cybersphere and Security(CSS) **Page no:**

Practical Number:- 2A

10. Click on R2 and give addresses and on port status as shown, then close the tap.

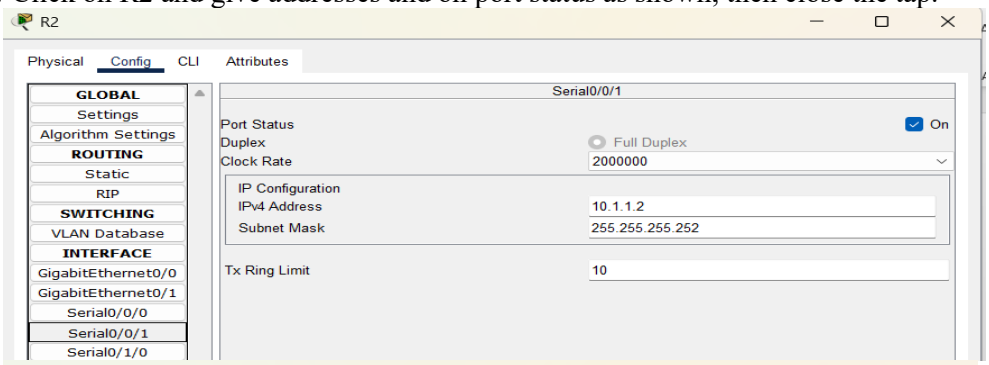

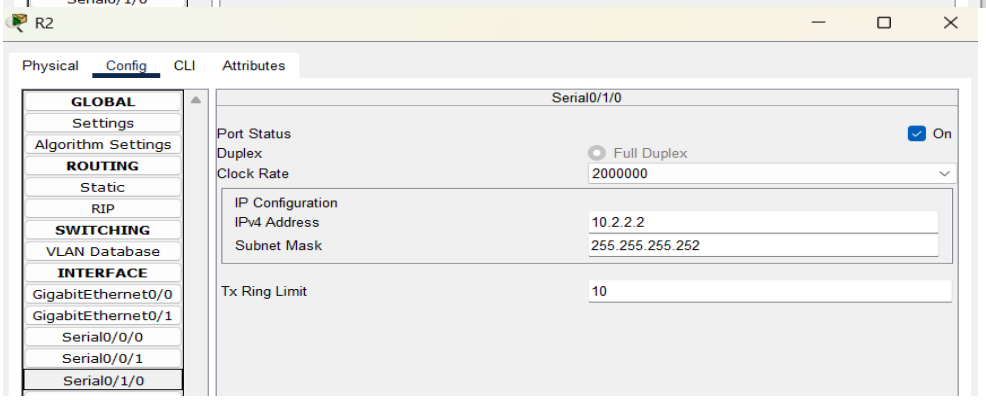

11. Click on R3 → assign the addresses → on port status as shown, then close the tap.

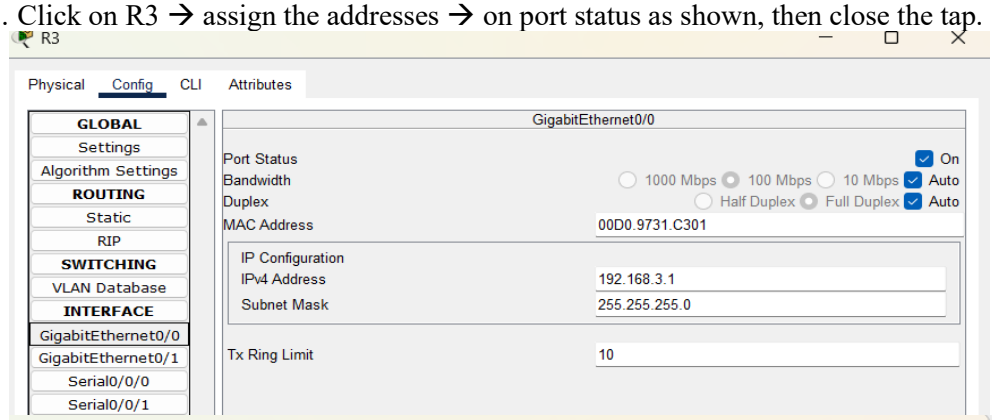

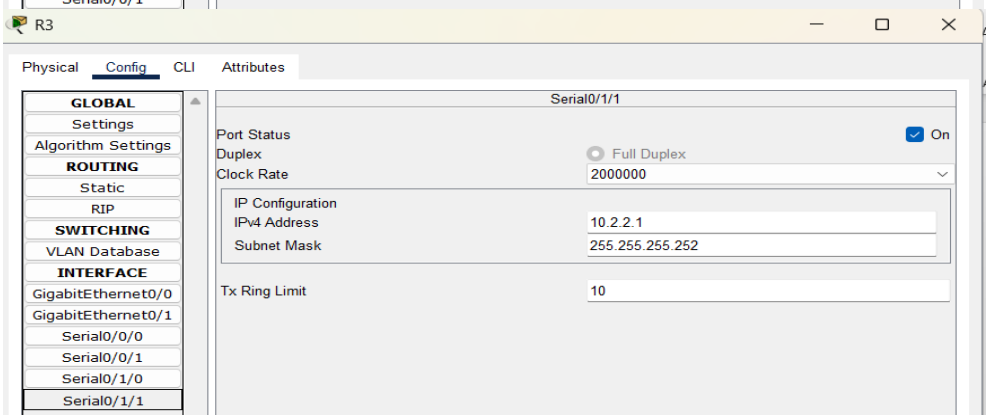

Teacher's Signature

BHAVAN'S COLLEGE AUTONOMOUS, ANDHERI-WEST
PRACTICAL JOURNAL

Class: TYIT **Sem: VI** **Roll No.: TYIT30** **Date: 10-12-2025**

Course Name: Cybersphere and Security(CSS) **Page no:**

Practical Number:- 2A

12. Click on SSH Client → desktop → IP configuration → assign addresses as given and close.

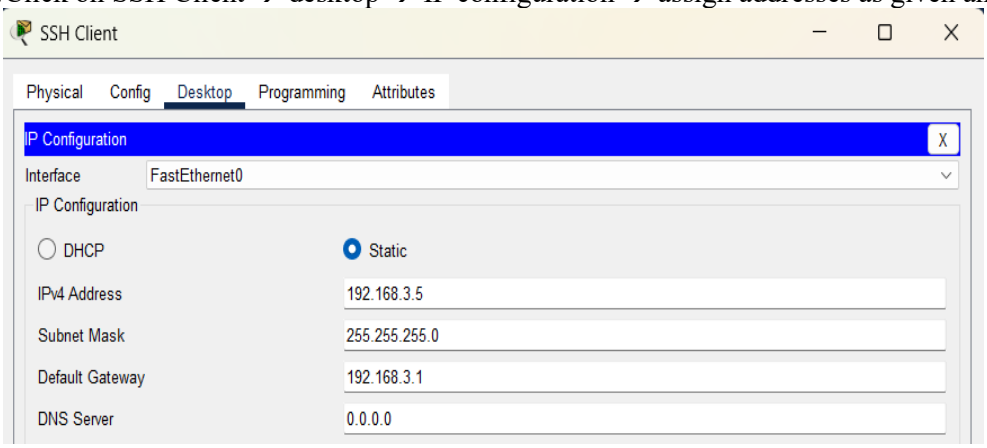

13. Now you can send a message only in an area.

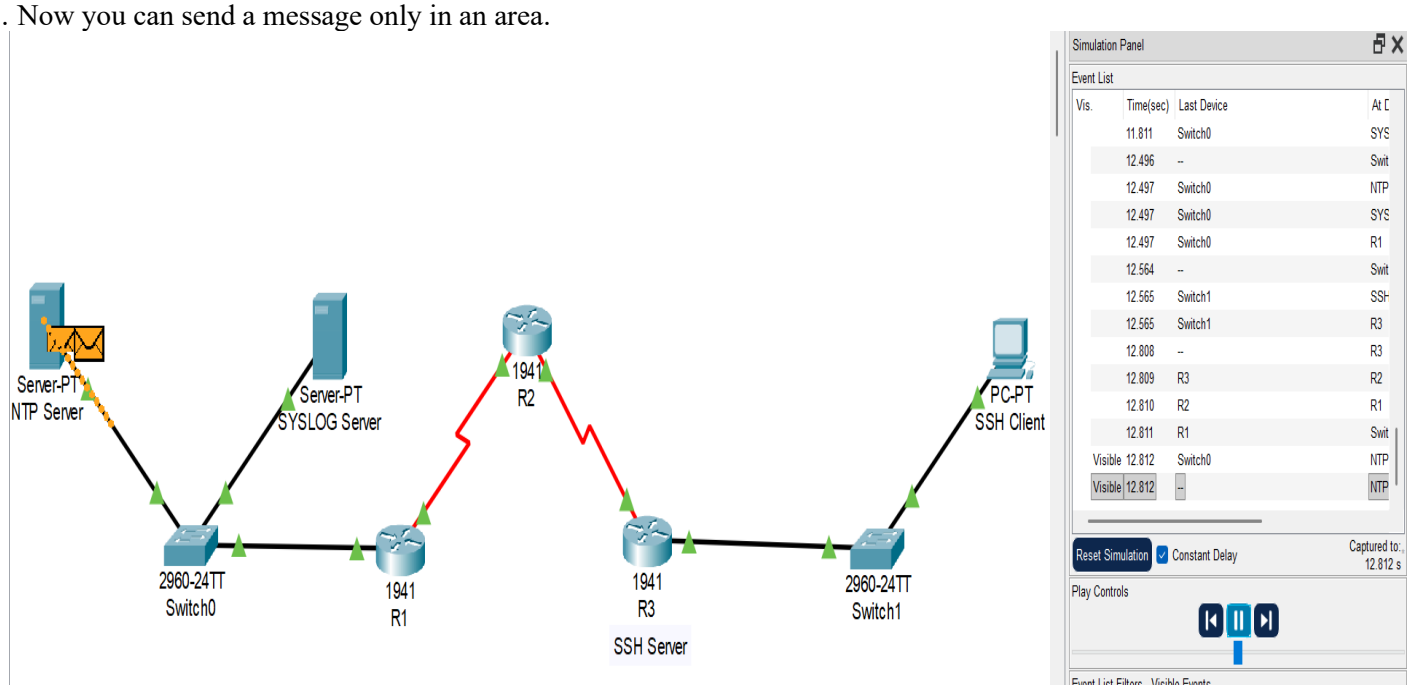

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	NTP ...	R1	ICMP		0.000	N	0	(edit)	(delete)

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	Successful	SYSL...	R1	ICMP		0.000	N	2	(edit)	(delete)
	Successful	R3	SSH Client	ICMP		0.000	N	3	(edit)	(delete)
	Successful	SSH ...	R3	ICMP		0.000	N	4	(edit)	(delete)

Teacher's Signature

BHAVAN'S COLLEGE AUTONOMOUS, ANDHERI-WEST
PRACTICAL JOURNAL

Class: TYIT **Sem: VI** **Roll No.: TYIT30** **Date: 10-12-2025**

Course Name: Cybersphere and Security(CSS) **Page no:**

Practical Number:- 2A

2nd Steps: OSPF MD5 Authentication.

1. Click on R1 → CLI → paste these three lines in that, then close.
   - router ospf 1
   - network 192.168.1.0 0.0.0.255 area 0
   - network 10.1.1.0 0.0.0.3 area 0
2. Click on R2 → CLI → paste these three lines in that, then close.
   - router ospf 2
   - network 10.1.1.0 0.0.0.3 area 0
   - network 10.2.2.0 0.0.0.3 area 0
3. Click on R3 → CLI → paste these three lines in that, then close.
   - router ospf 3
   - network 192.168.3.0 0.0.0.255 area 0
   - network 10.2.2.0 0.0.0.3 area 0
4. After that, you can send a message from the NTP Server to the SSH Client directly.

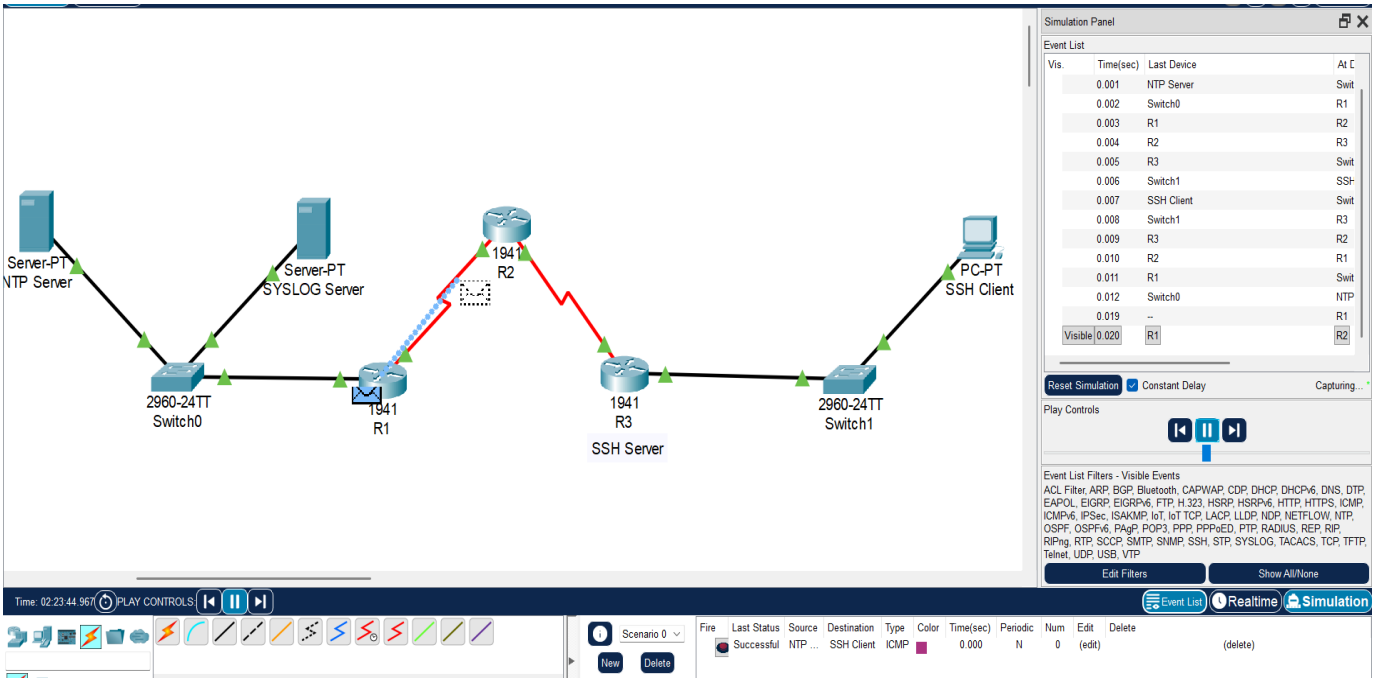

Teacher's Signature