
ESP32-S3 Type C


ESP32_S3_TypeC[3A] Port

USB Connectors Block


USB C CONNECTOR 1

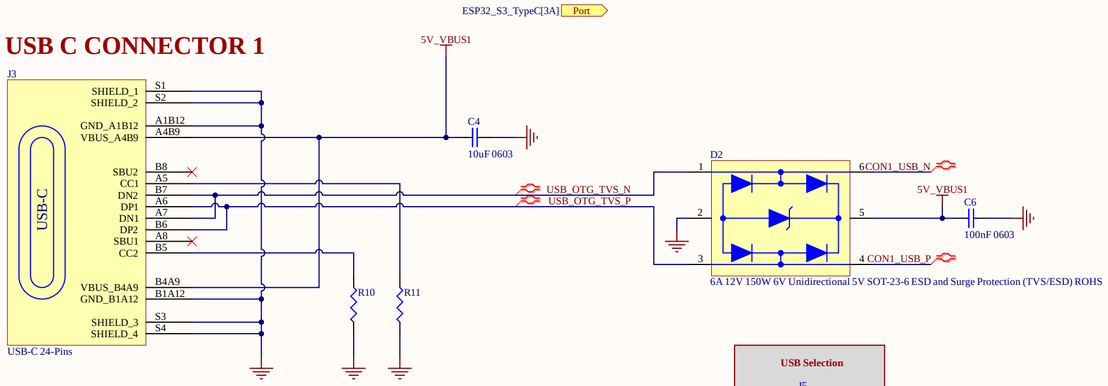

USB Selection




USB C CONNECTOR 2

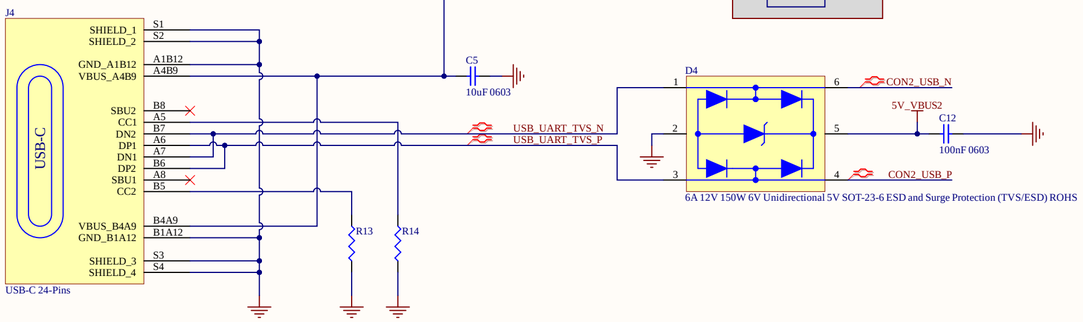


ESP32 Module and Autoreset Block

ESP32 Module

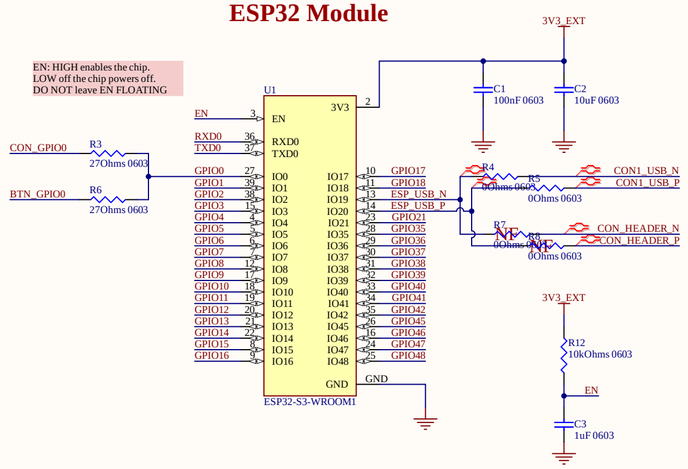


Serial Signals Handling

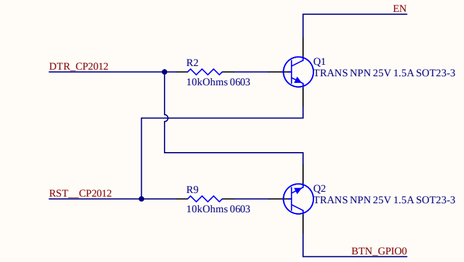


GPIOs and Button Block


Headers

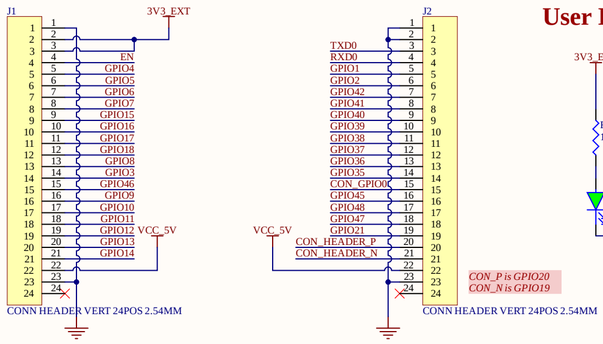

User LED




RESET BUTTON




BOOT BUTTON




Power LED



Voltage Regulator 5V-3.3V

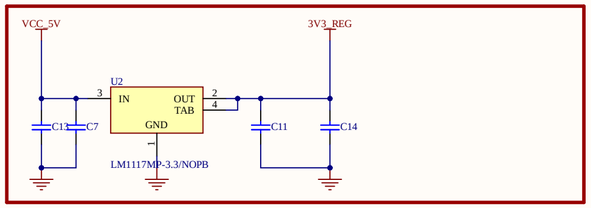

USB to UART

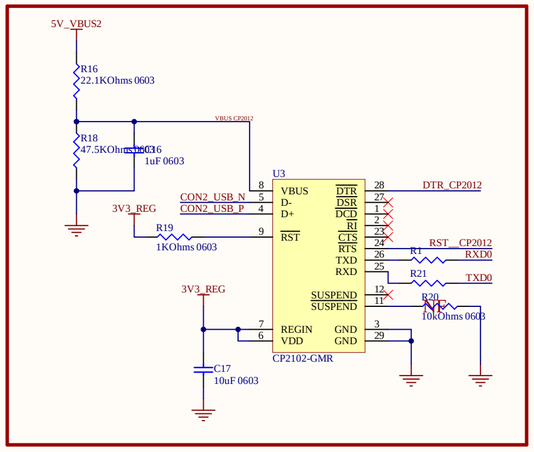

Strapping Pins


0	Pull-Up
3	Floating
45	Pull-Down
46	Pull-Down


ADC1 10 channels: GPIO1 - GPIO10
ADC2 10 channels: GPIO11 - GPIO20 **Total 20 channels**
Resolution of ESP32-S3 ADC raw results under Single Read mode is 12-bit.

Most GPIO pins can be assigned for I2C

For uploading code using USB to TTL module (CP2102,...). While uploading process is going, PRESS and HOLD BOOT button then PRESS RESET ONCE, then RELEASE those TWO.

Title	ESP32-S3 Type C		
Size A2	Number	Revision	1
Date: 10/30/2026		Sheet of	
File: E:\ESP32_S3_WROOM-1\ESP32_S3_TypeC.SchDoc		Drawn By:	Pham Nguyen Minh Duc

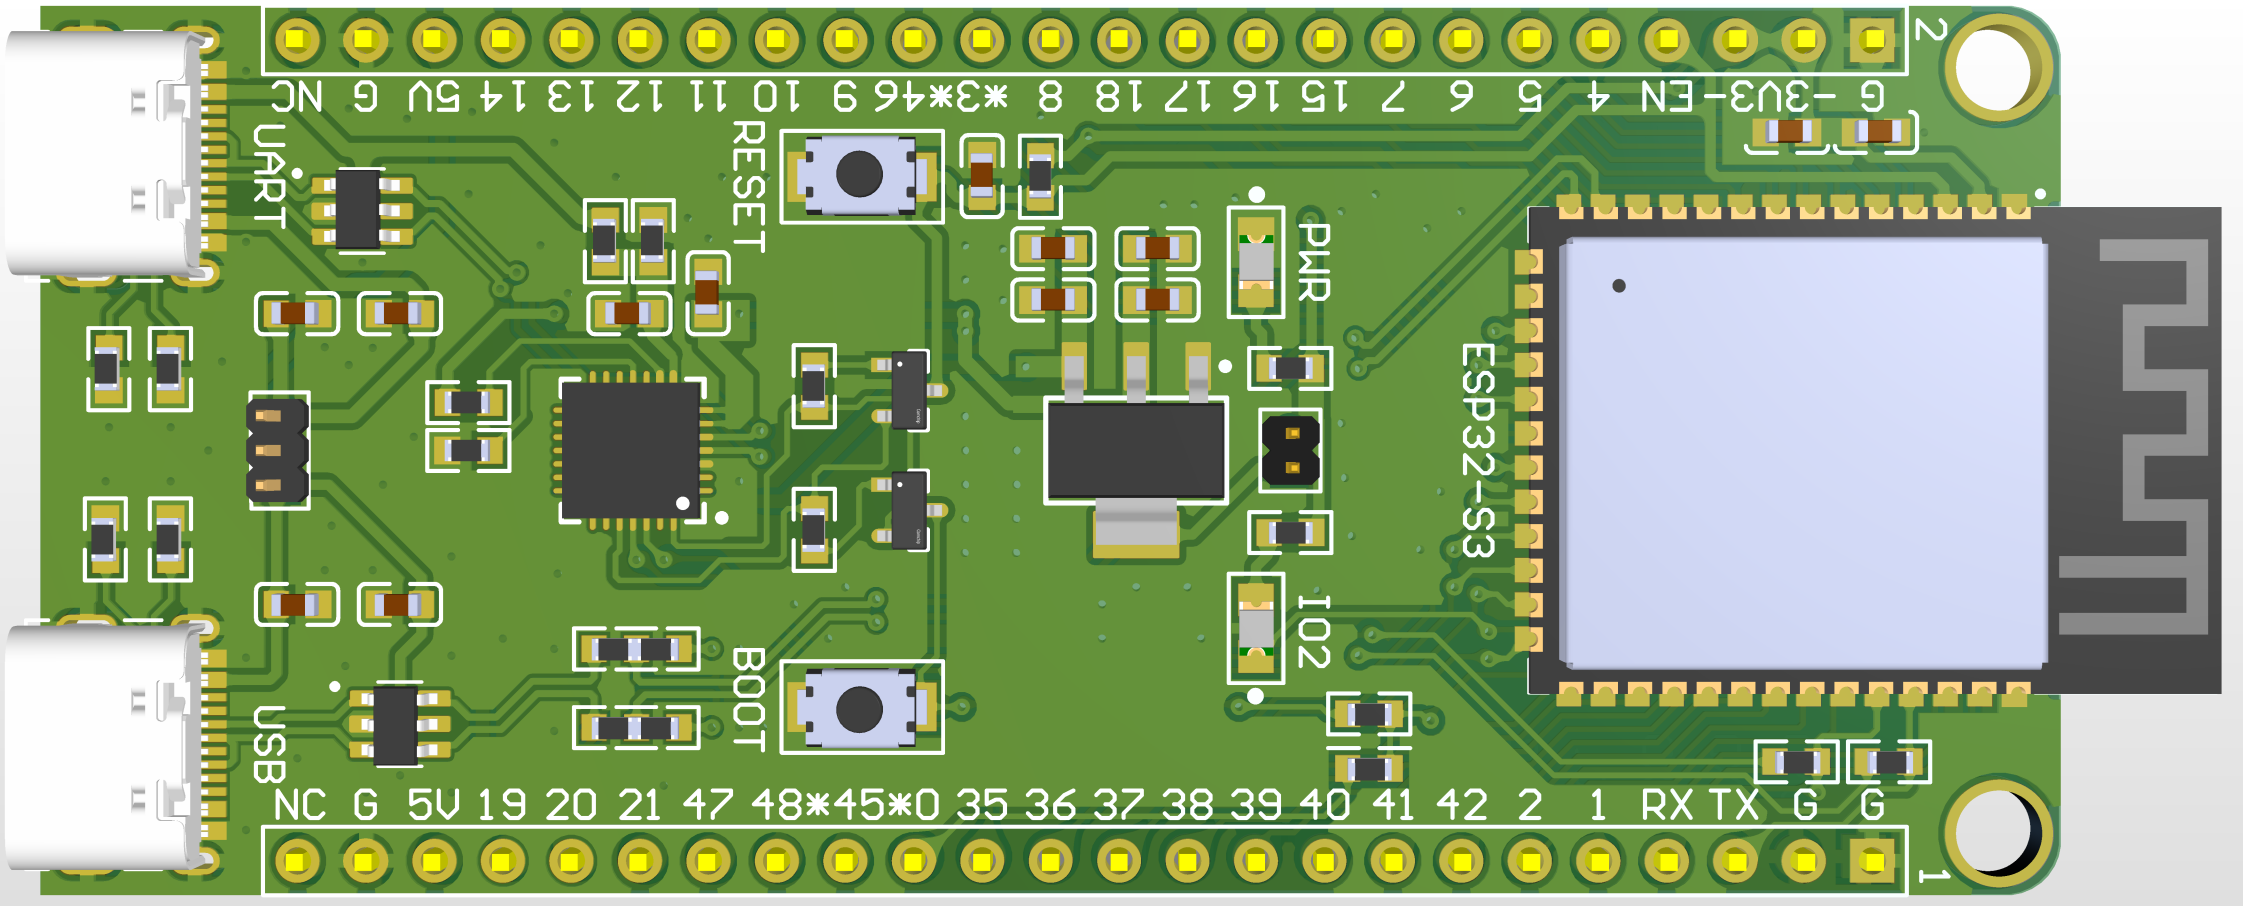
G -3V3-EN 4 5 6 7 15 16 17 18 8 *3*46 9 10 11 12 13 14 5V G NC
2
UART
RESET
PWR
ESP32-S3
IO2
BOOT
USB
NC G 5V 19 20 21 47 48*45*0 35 36 37 38 39 40 41 42 2 1 RX TX G G
1

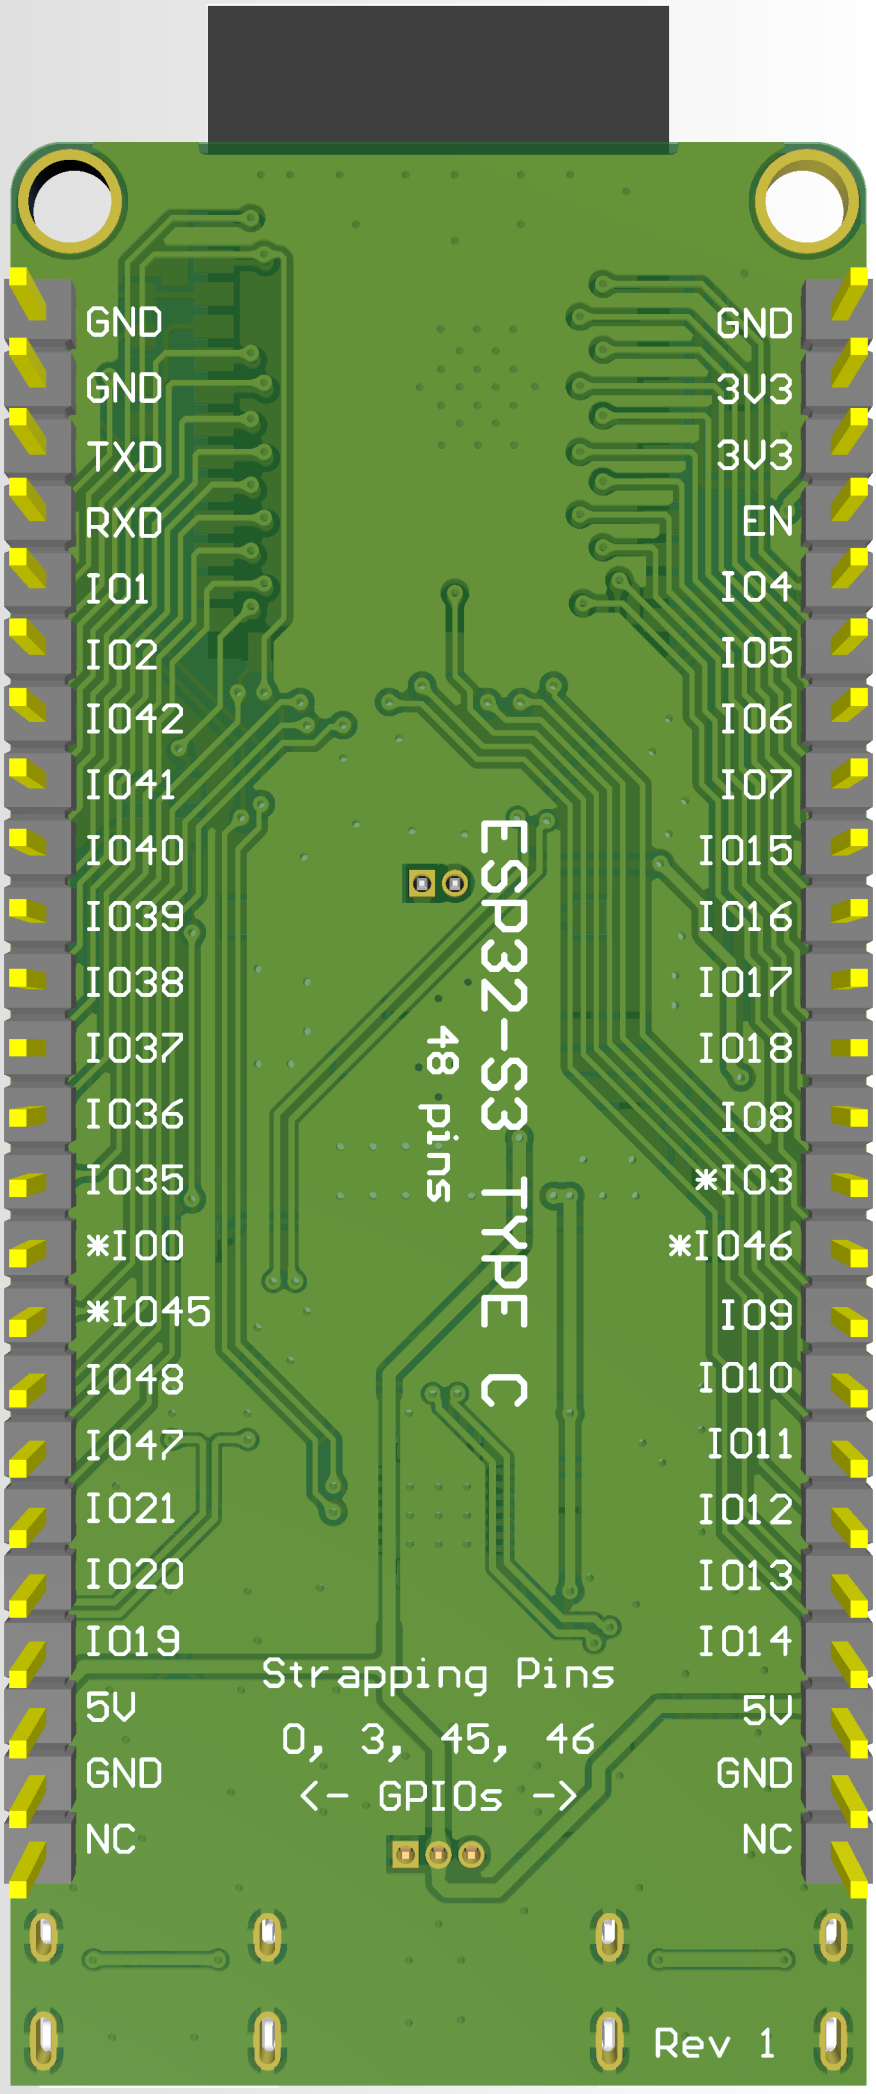
GND
GND
TXD
RXD
IO1
IO2
IO42
IO41
IO40
IO39
IO38
IO37
IO36
IO35
*IO0
*IO45
IO48
IO47
IO21
IO20
IO19
5V
GND
NC
GND
3V3
3V3
EN
IO4
IO5
IO6
IO7
IO15
IO16
IO17
IO18
IO8
*IO3
*IO46
IO9
IO10
IO11
IO12
IO13
IO14
5V
GND
NC
ESP32-S3 TYPE C
48 pins
Strapping Pins
0, 3, 45, 46
<- GPIOs ->
Rev 1