


CISCO

JOB 1

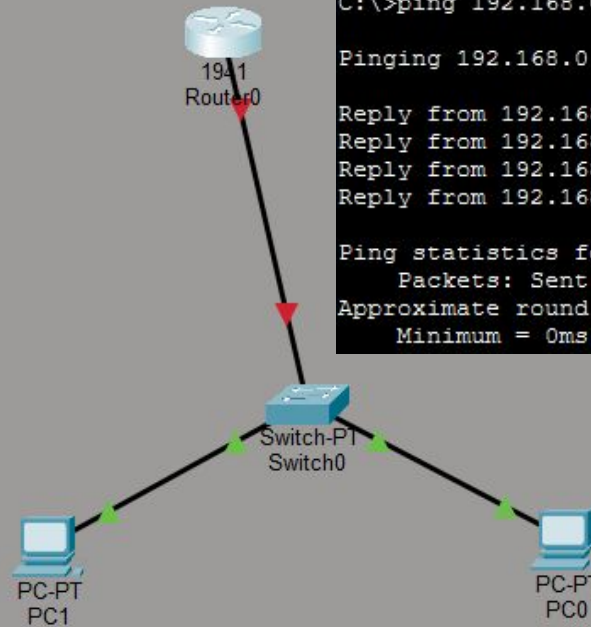

```
C:\>ping 192.168.0.20
```

```
Pinging 192.168.0.20 with 32 bytes of data:
```

```
Reply from 192.168.0.20: bytes=32 time<1ms TTL=128  
Reply from 192.168.0.20: bytes=32 time<1ms TTL=128  
Reply from 192.168.0.20: bytes=32 time<1ms TTL=128  
Reply from 192.168.0.20: bytes=32 time=1ms TTL=128
```

```
Ping statistics for 192.168.0.20:
```

```
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),  
    Approximate round trip times in milli-seconds:  
        Minimum = 0ms, Maximum = 1ms, Average = 0ms
```

JOB 2

Router0

IP Configuration

IPv4 Address

192.168.0.1

Subnet Mask

255.255.255.0


Serveur central Cisco

Display Name

Gateway/DNS IPv4

☒ DHCP

JOB 3

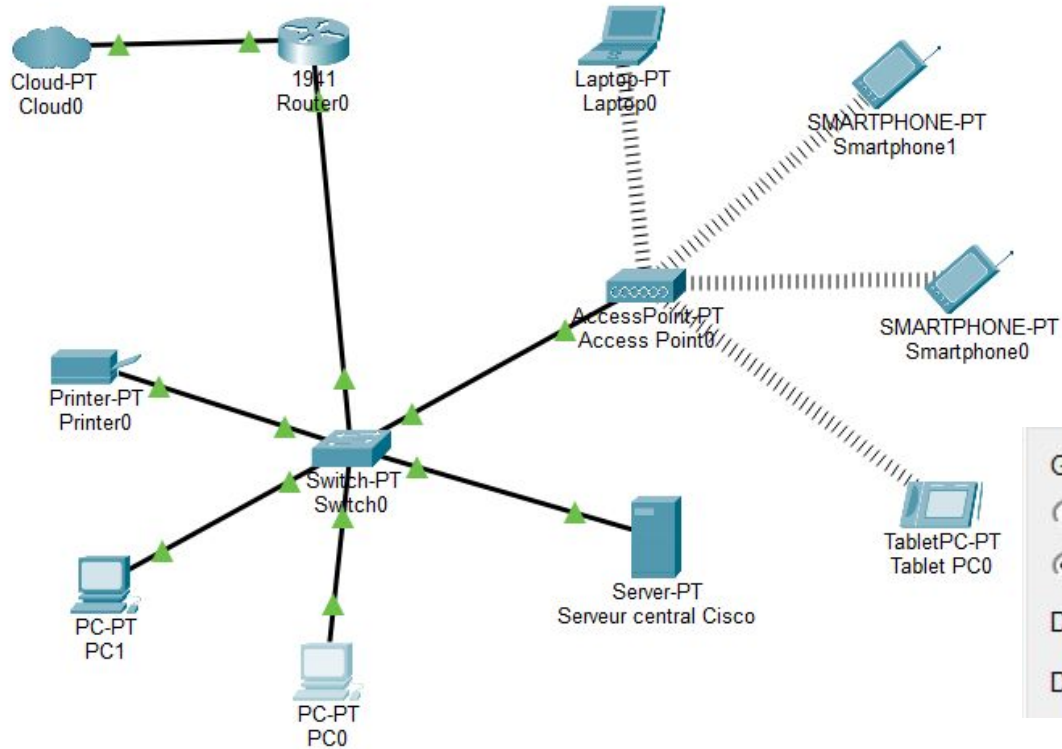

Gateway/DNS IPv4


☐ DHCP

☒ Static

Default Gateway 192.168.0.5

DNS Server 192.168.0.6

JOB 4

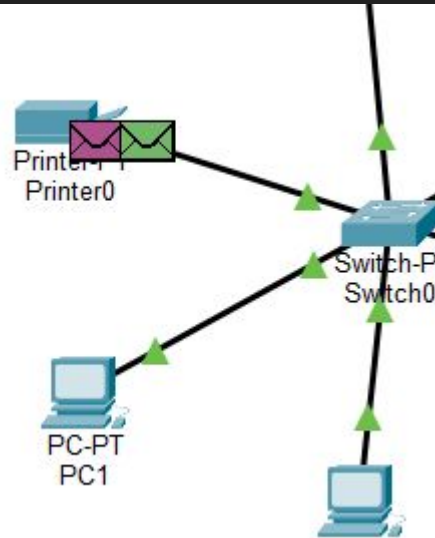

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
	In Progress	Printer0	192.168.0.10	ICMP		5.000	Y	0	(edit)	

Sending mail to user2@gmail.com , with subject : test ... Mail Server:
192.168.0.2
Send Success.

Cancel
Send/Receive

Receiving mail from POP3 Server 192.168.0.2
Receive Mail Success.