


RYMAPT

---

Ethoscope user manual and documentation

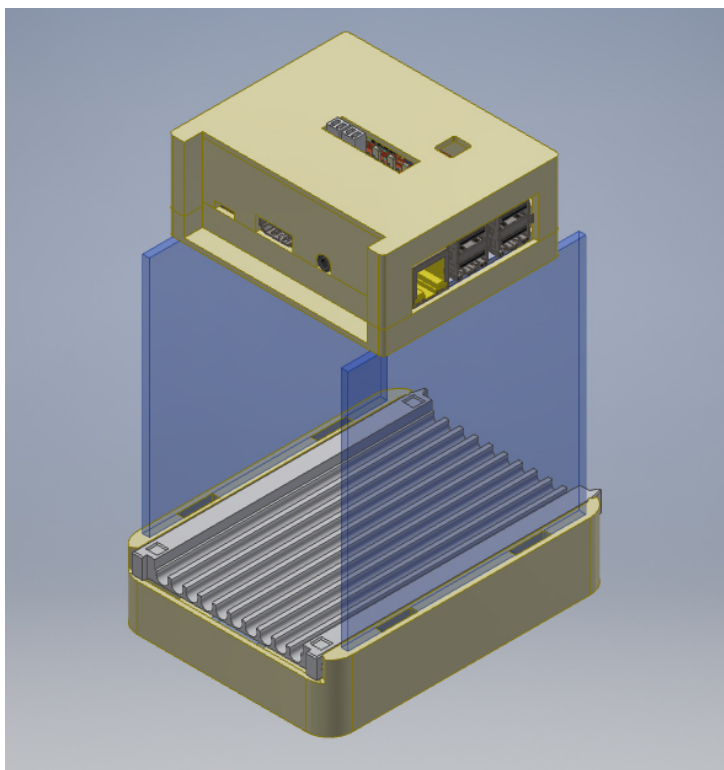

*Ethoscope user manual and documentation*

RYMAPT - 2017  
info@rymapt.com

# Contents

<b>Contents</b>	<b>ii</b>
<b>1 Hardware description</b>	<b>1</b>
1.1 Setup . . . . .	1
<b>Abbreviations</b>	<b>2</b>

# Chapter 1

## Hardware description

The Ethoscope is comprised of the following parts:

**Top unit** This contains the main components of the Ethoscope, such as the processing unit, the camera and the environmental shield (optional). The components are enclosed in a plastic shell.

**Base unit** The unit acts as a base for the whole Ethoscope and as a support and alignment tool for the arena. The base unit also contains the strip of [Light Emitting Diode \(LED\)](#) used to provide [Infra-red \(IR\)](#) illumination to the arena.

**Arena** The arena defines the experiment to be performed. The basic arena, provided with the standard kit, provides support for up to twenty glass tubes, each one defined as a [Region Of Interest \(ROI\)](#). Three black dots in the corner of the arena are used by the software to determine a spatial system of reference.

**Side walls** The walls connect the base to the top unit and ensure a correct distance between camera and arena. The standard walls are made of 3 mm acrylic sheet.

### 1.1 Setup



# Abbreviations

**IR** Infra-red. [1](#)

**LED** Light Emitting Diode. [1](#)

**ROI** Region Of Interest. [1](#)