


Yanma

Refining Power



End to End Power Quality Solutions

About Yansa

Yansa Energy Solutions is an end-to-end solution provider in the domain of Power Quality Improvement. We offer comprehensive solutions to commercial building, industries, infra projects, OEMs, panel builders and other electricity users.

The offering includes Power Quality Data measurement, Analysis & Reports generation, recommendation for Improvement of Power Factor and Harmonic Mitigation. Leveraging range of innovative Static Var Generators (SVGs), Active Harmonic Filters (AHFs), Power Capacitors and other Allied Products.

At Yansa, we are committed to “**Refining Power**” in your electrical system and believe in delivering more than we commit. Every solution we design is customer-specific, built to optimize performance, efficiency, safety and reliability. Our service excellence remains our largest differentiator

Active PF & Harmonic Mitigation


Static VAR Generator (SVG)

- Ratings - 50kVAR, 108kVAR, 150kVAR at 415V AC, 120kVAR 690V AC, 50Hz
- Modular Design, Future Scalable
- High Efficiency > 98.5%
- Unique Simultaneous Waveform Real Time Display – Source Current & Voltages, Load Currents, SVG Currents
- Step-less Reactive Power Compensation – Helps Achieving PF closer to Unity
- Both Inductive and Capacitive Reactive Compensation
- Corrects Power Factor in Individual Phases
- No harmonic resonances/amplifications
- Dynamic Response Time - 100 micro seconds
- Total Correction Time <20 milli second
- Relatively Maintenance Free
- Optional 14 Channel Hybrid Controller for Passive Capacitors



Static VAR Generator Plus (SVG+)

- Ratings - 50kVAR, 108kVAR, 150kVAR at 415V AC, 120kVAR 690V AC, 50Hz
- Modular Design, Future Scalable
- High Efficiency > 98.5%
- Unique Simultaneous Waveform Real Time Display – Source Current & Voltages, Load Currents, SVG Currents
- Step-less Reactive Power Compensation – Helps Achieving PF closer to Unity
- Both Inductive and Capacitive Reactive Compensation
- Corrects Power Factor in Individual Phases
- 50% Capacity can be used for Harmonic Mitigation up to 31st Order based on prioritisation
- Dynamic Response Time - 100 micro seconds
- Total Correction Time <20 milli second
- Optional 14 Channel Hybrid Controller for Passive Capacitors

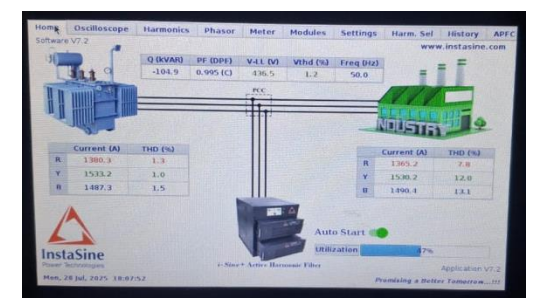

Active Harmonic Filter (AHF)


- Ratings 30A, 60A, 75A, 100A, 150A for 50Hz AC
- Capable to bring down THDi less than 3%
- Unique 15 Simultaneous Waveform Real Time Display – Source Current & Voltages, Load Currents, AHF Currents
- Available in 3P3W & 3P4W (Wherein Single Phase Loads are High) Versions
- 3 Level Topology
- 2.2 times the RMS Current Rating
- Available in both Monolithic & Modular Future Scalable Design
- Powdered Iron Core based Inductors (Iron Losses near to Zero)
- Harmonic Mitigation all even & odd, from 2nd to 71st order Harmonics
- Negative Sequence Current Cancellation (Unbalance resulting from 3-Phase and 2-Phase Loads)
- Zero Sequence (Neutral) Current Cancellation (Only in 3-Phase 4-Wire AHFs)
- Displacement Power Factor Improvement
- Both Inductive and Capacitive Reactive Compensation



Passive PF & Harmonic Mitigation

Yan-Q Power Quality Analysis

- For Power Factor Improvement & Harmonic Mitigation
- Analysis of Energy Bills issued by Electricity Authorities
- Power Quality Data Measurement of Facility
- Analysis of Power Quality Data
- Detailed Power Quality Report
- Identify the Power Quality Problems
- Recommendations for Power Factor Improvement
- Recommendations for Harmonic Mitigation

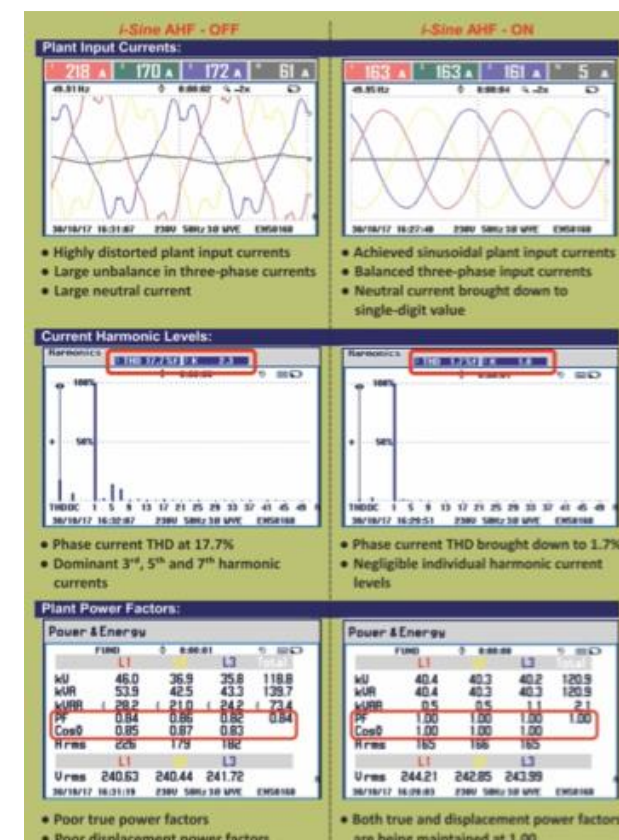

Low Voltage Power Capacitors

- For Power Factor Improvement
- Range 230V to 1000V, 50/60Hz
- Standards EN/IEC 60831 Part 1 & 2, IS 13340
- Approvals - UL, ULc, BIS
- 2.5kVAR to 56.2kVAR in Cylindrical/ Triangular Aluminum Housing
- Upto 500kVAR in welded rectangular casing
- Heavy Duty-Gas Filled, Super Heavy Duty and Ultra Heavy Duty (Caster Oil Filled)
- Safety - Burst Proof Tested at UL/ULc
- Low Losses: < 0.25W/kVAR, to < 0.45W/kVAR
- Over Voltages - U_{cn} + 10 % (up to 8 hours daily), U_{cn} + 15 % (up to 30 minutes daily), U_{cn} + 20 % (up to 5 minutes), U_{cn} + 30 % (up to 1 minute)
- Protection - IP20, Higher Ingress Protection Class (IP54 upon request)



Series Detuned Reactors/Harmonic Filters

- Avoidance of Resonance Conditions
- Voltage : 440 Volts at 50Hz
- Output : 5kVAR 100kVAR
- Low Losses & High Linearity
- Linearity : 180%, 200%
- Detuned Factor : 5.67%, 7%, 14%, 20%
- Standard – IS 5553
- Connection – In Series with Capacitor
- Winding – Copper & Aluminium
- Core – Iron
- Protection – Thermal Switch
- Insulation Class – F & H



APFC Relay

- For Automatic Power Factor Improvement with Passive Capacitors
- Available in 6 & 12 Steps
- Supply Voltage: 90V – 300VAC
- Measuring Voltage: 90V – 690VAC
- Operating Voltage: 230V +10%
- Currentselection:1A/5Amps
- Standard: IEC 60664-1 , IEC/EN 61010-1 ▪ IEC/EN 61326
- CE-Certification
- Automatic Self-Setting
- Over Temp Switch Off
- Constant Display of actual PF & energized steps, Display of PF, P,Q and S
- Optimized Switching Performance
- Alarm Functions
- ProtectionClass:IP52/54
- Interface optional



Thyristors Switching Modules for Capacitors

- Range - 15kVAR, 25kVAR , 50kVAR, 75kVAR, 100kVAR
- Voltage - 400V / 440V /480V
- IEC/EN 50178
- In Series Connection with Capacitor
- Thermal Cut-Off
- Switching without Inrush Current, Smooth Disconnection
- Recovery Time 20ms.
- Triggering Voltage 8 – 30V DC.
- Protection Class IP10/IP20.
- Switched Phase:2, Semiconrolled.
- Cooling - Air Natural / Air Forced(Fan)
- Ambient Temp: -10 / 45°C
- 15kVAR, 25kVAR , 50kVAR, 75kVAR, 100kVAR ▪ Voltage: 400V / 440V /480V



Line Chokes

- Range – upto 800A
- Voltage - 400V / 415V /440V
- Series Input or Output
- Conductor - Copper
- Tape Wound
- Class of Insulation – B,F,H
- With or Without Enclosure
- Cooling – Air Natural, Air Forced



[illegible]

JasTra
A product of JASTECH

Range of Line Chokes, Isolation transformers, Control Transformers

Yansa Energy Solutions,
Plot No.481, Sector – 8
IMT Manesar , Gurgaon – 122052, India
+91 124 4030844
info@yansa.in, www.yansa.in

Narayan
+91 9810607301
narayan@yansa.in