


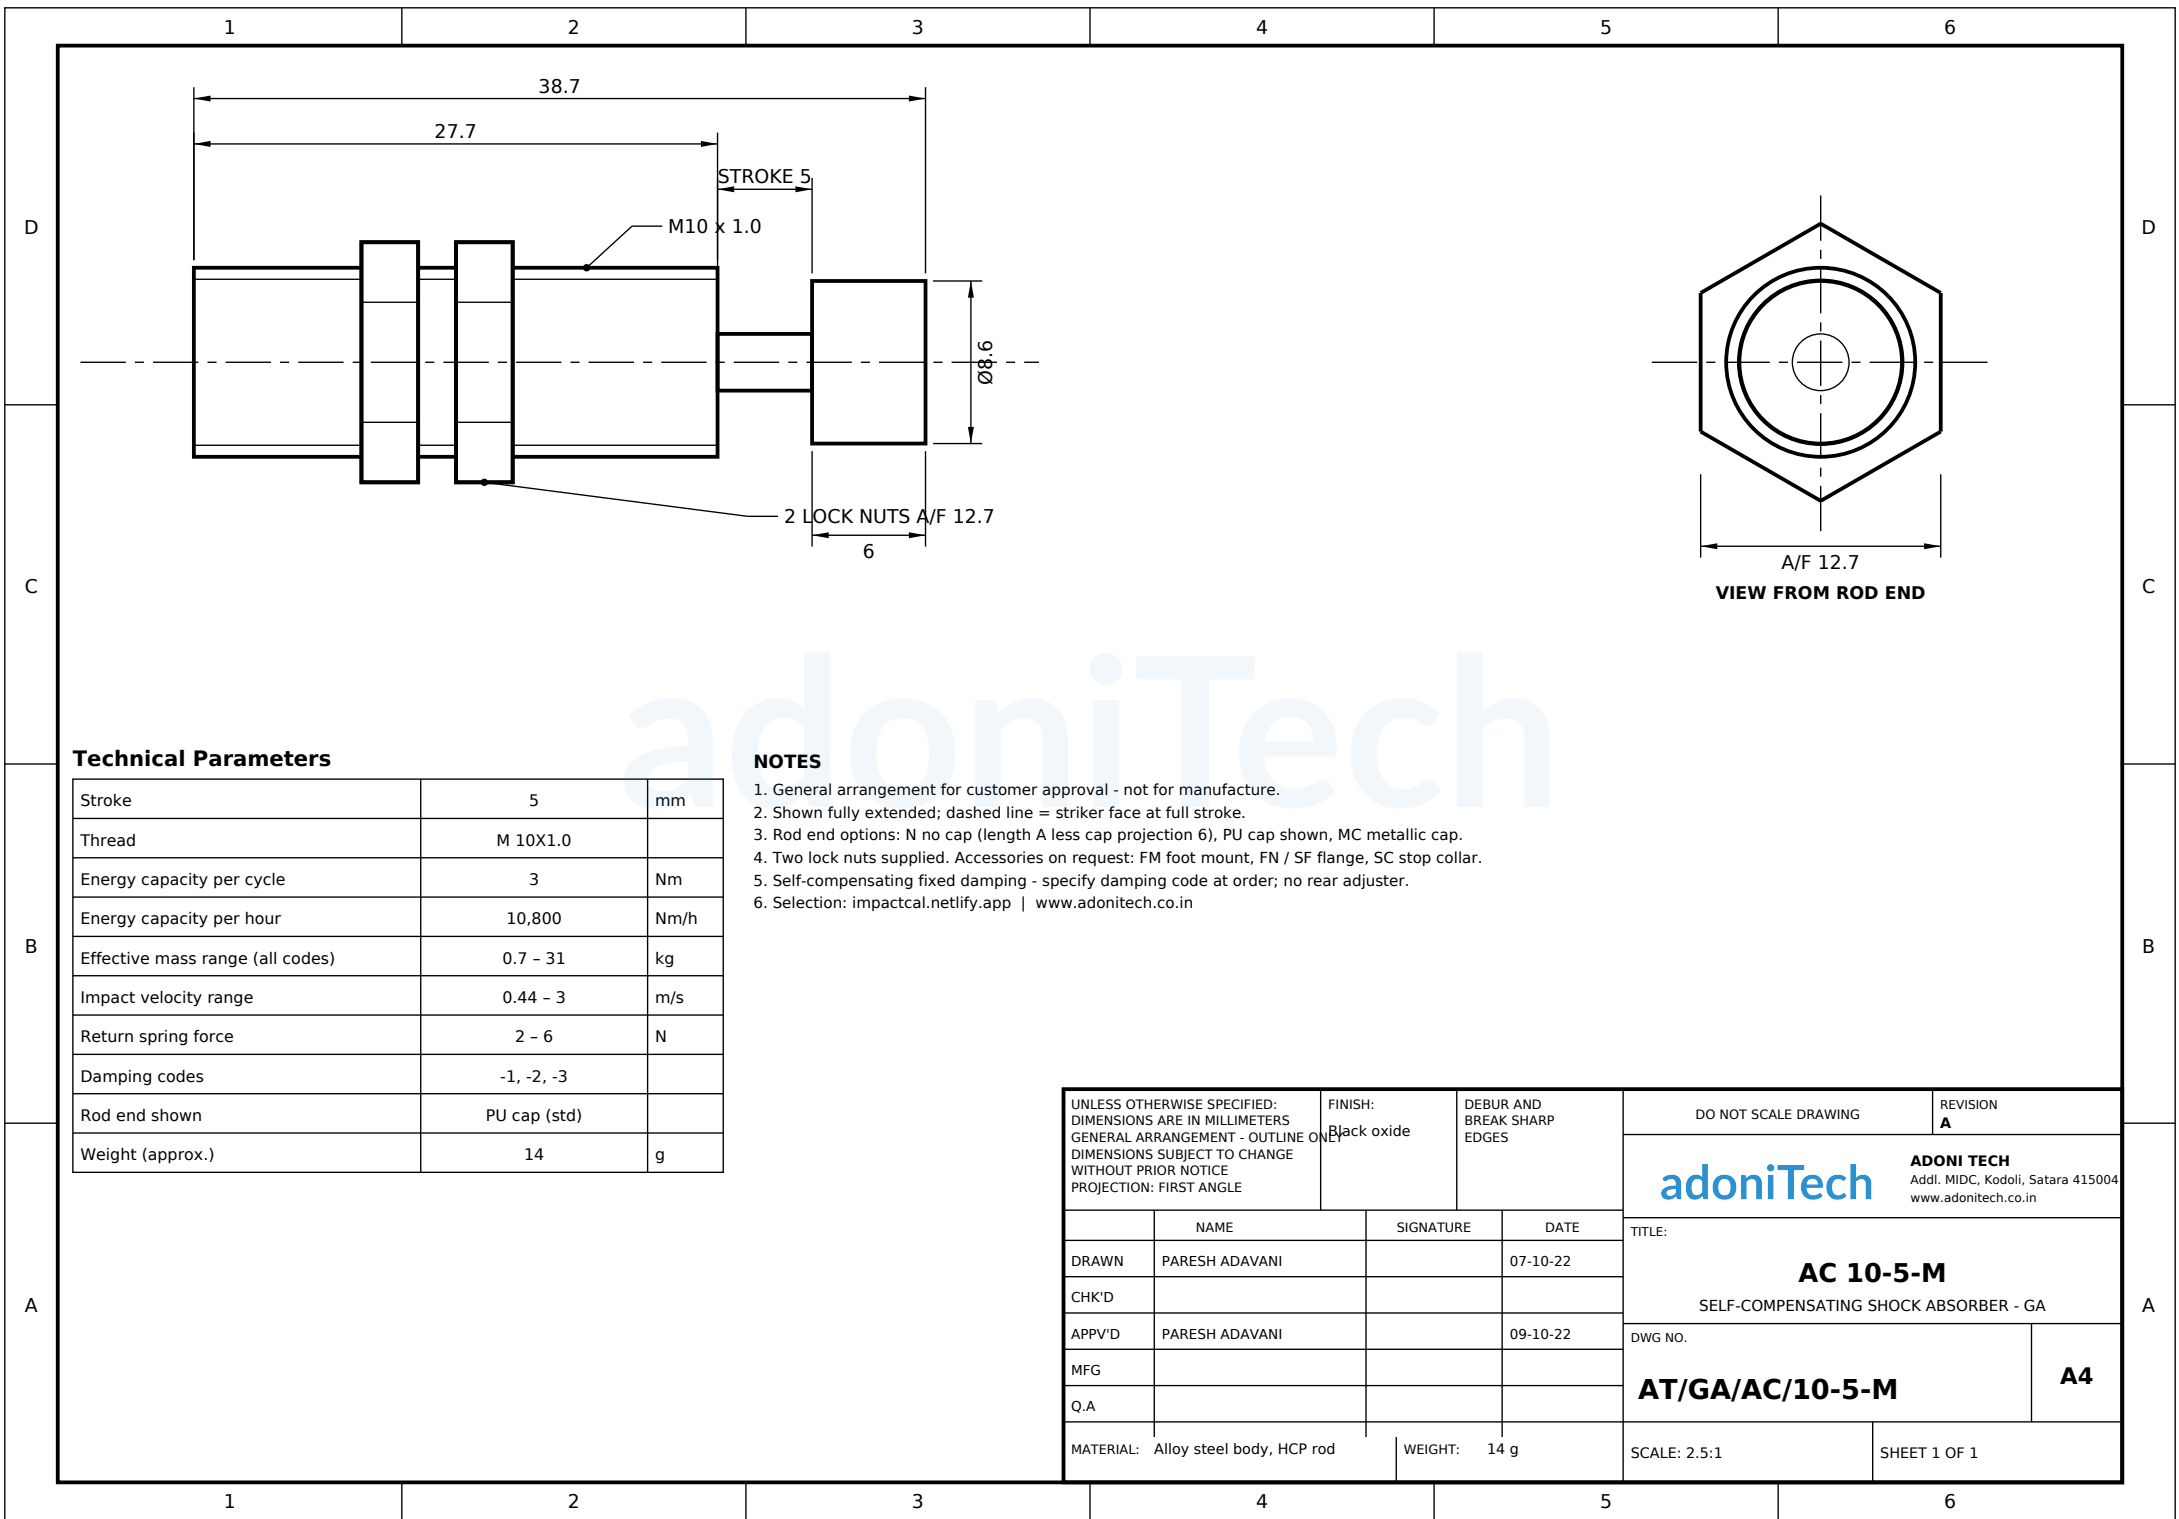

Technical Parameters

Stroke	5	mm
Thread	M 10X1.0	
Energy capacity per cycle	3	Nm
Energy capacity per hour	10,800	Nm/h
Effective mass range (all codes)	0.7 - 31	kg
Impact velocity range	0.44 - 3	m/s
Return spring force	2 - 6	N
Damping codes	-1, -2, -3	
Rod end shown	PU cap (std)	
Weight (approx.)	14	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 6), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: [impactcal.netlify.app](#) | [www.adonitech.co.in](#)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in								
	NAME		SIGNATURE		DATE		TITLE: AC 10-5-M SELF-COMPENSATING SHOCK ABSORBER - GA			
DRAWN	PARESH ADAVANI				07-10-22					
CHK'D							DWG NO. AT/GA/AC/10-5-M A4			
APPV'D	PARESH ADAVANI				09-10-22					
MFG							SCALE: 2.5:1 SHEET 1 OF 1			
Q.A										
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 14 g							