


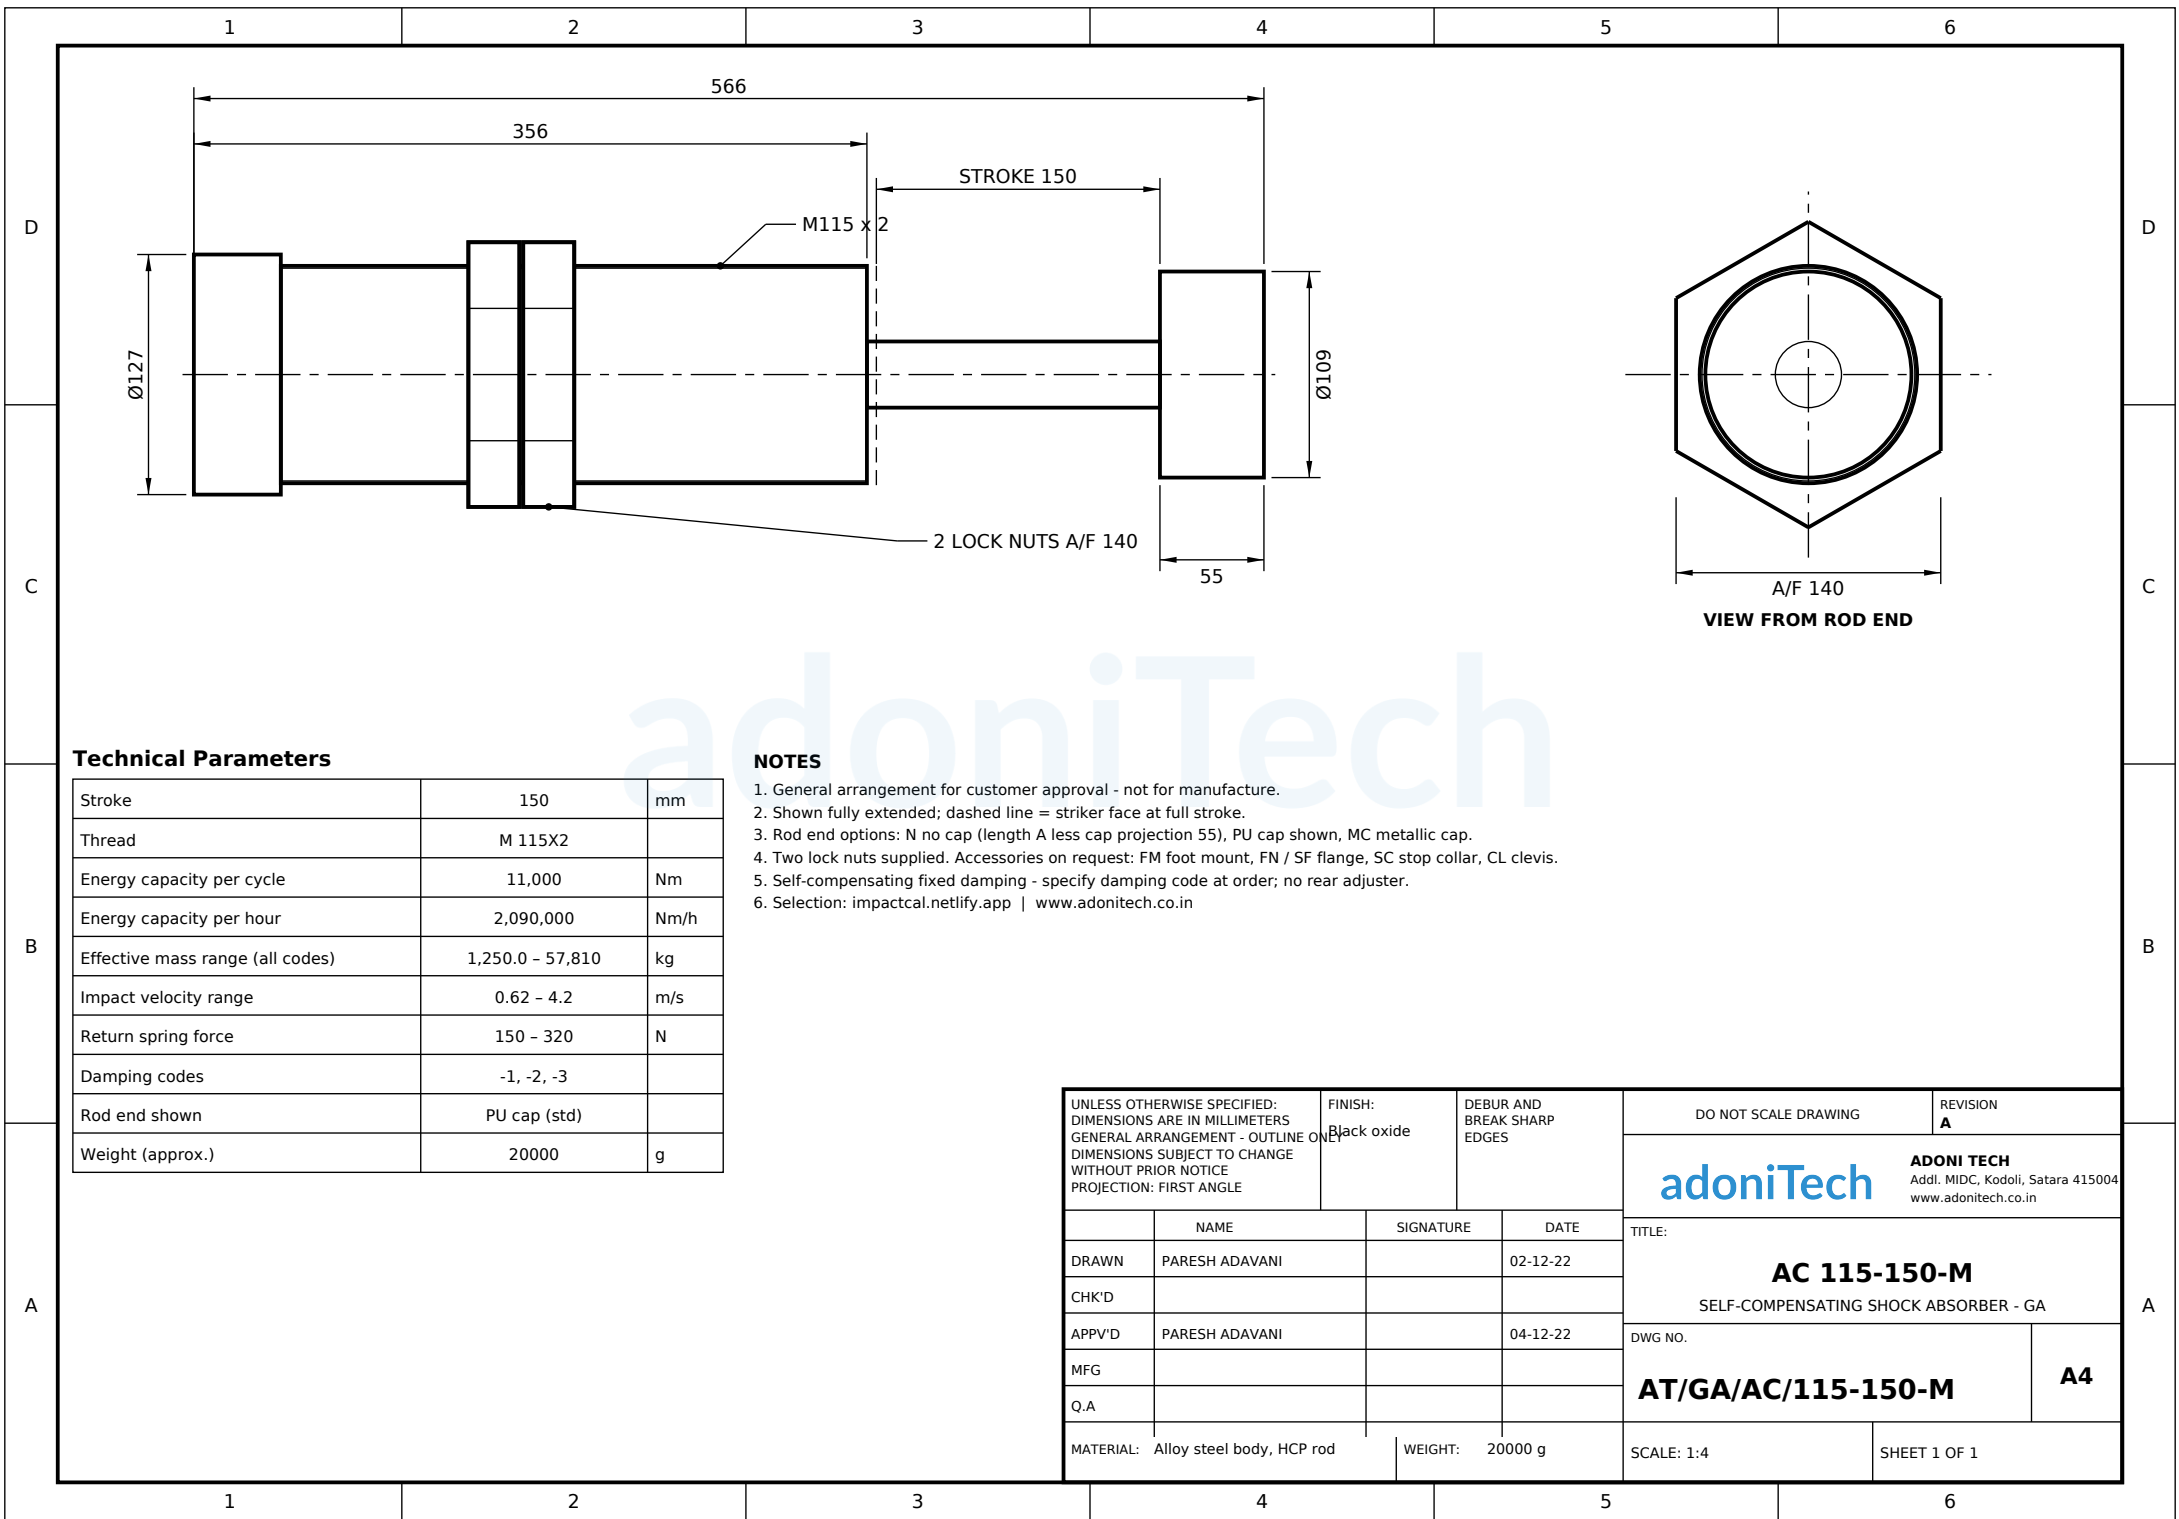

Technical Parameters

Stroke	150	mm
Thread	M 115X2	
Energy capacity per cycle	11,000	Nm
Energy capacity per hour	2,090,000	Nm/h
Effective mass range (all codes)	1,250.0 - 57,810	kg
Impact velocity range	0.62 - 4.2	m/s
Return spring force	150 - 320	N
Damping codes	-1, -2, -3	
Rod end shown	PU cap (std)	
Weight (approx.)	20000	g

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker face at full stroke.
- Rod end options: N no cap (length A less cap projection 55), PU cap shown, MC metallic cap.
- Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
- Self-compensating fixed damping - specify damping code at order; no rear adjuster.
- Selection: [impactcal.netlify.app](#) | [www.adonitech.co.in](#)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		adoniTech						ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
NAME		SIGNATURE		DATE		TITLE:			
DRAWN		PARESH ADAVANI		02-12-22		AC 115-150-M SELF-COMPENSATING SHOCK ABSORBER - GA			
CHK'D									
APPV'D		PARESH ADAVANI		04-12-22		DWG NO. AT/GA/AC/115-150-M			
MFG									
Q.A						A4			
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 20000 g		SCALE: 1:4					