
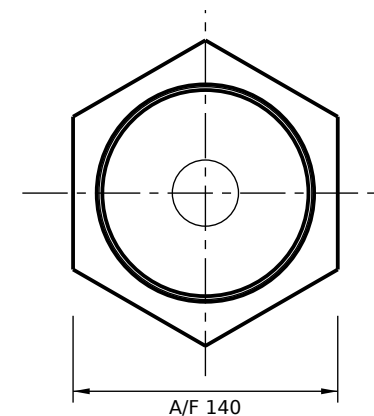


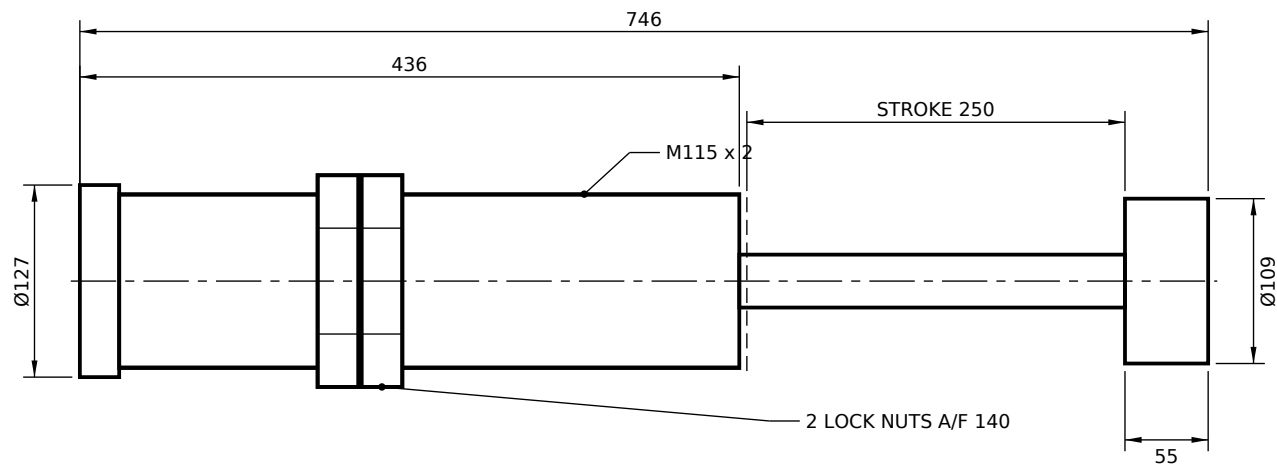

VIEW FROM ROD END (SCALE 1:4)

Technical Parameters

Stroke	250	mm
Thread	M 115X2	
Energy capacity per cycle	-	Nm
Energy capacity per hour	-	Nm/h
Effective mass range (all codes)	-	kg
Impact velocity range	-	m/s
Return spring force	-	N
Damping codes	-	
Rod end shown	PU cap (std)	
Weight (approx.)	-	g

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker face at full stroke.
- Rod end options: N no cap (length A less cap projection 55), PU cap shown, MC metallic cap.
- Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
- Self-compensating fixed damping - specify damping code at order; no rear adjuster.
- Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in							
	NAME		SIGNATURE		DATE		TITLE:		
DRAWN	PARESH ADAVANI				06-12-22		AC 115-250-M SELF-COMPENSATING SHOCK ABSORBER - GA		
CHK'D									
APPV'D	PARESH ADAVANI				08-12-22		DWG NO.		A4
MFG							AT/GA/AC/115-250-M		
Q.A									
MATERIAL: Alloy steel body, HCP rod			WEIGHT:			SCALE: 1:5		SHEET 1 OF 1	