


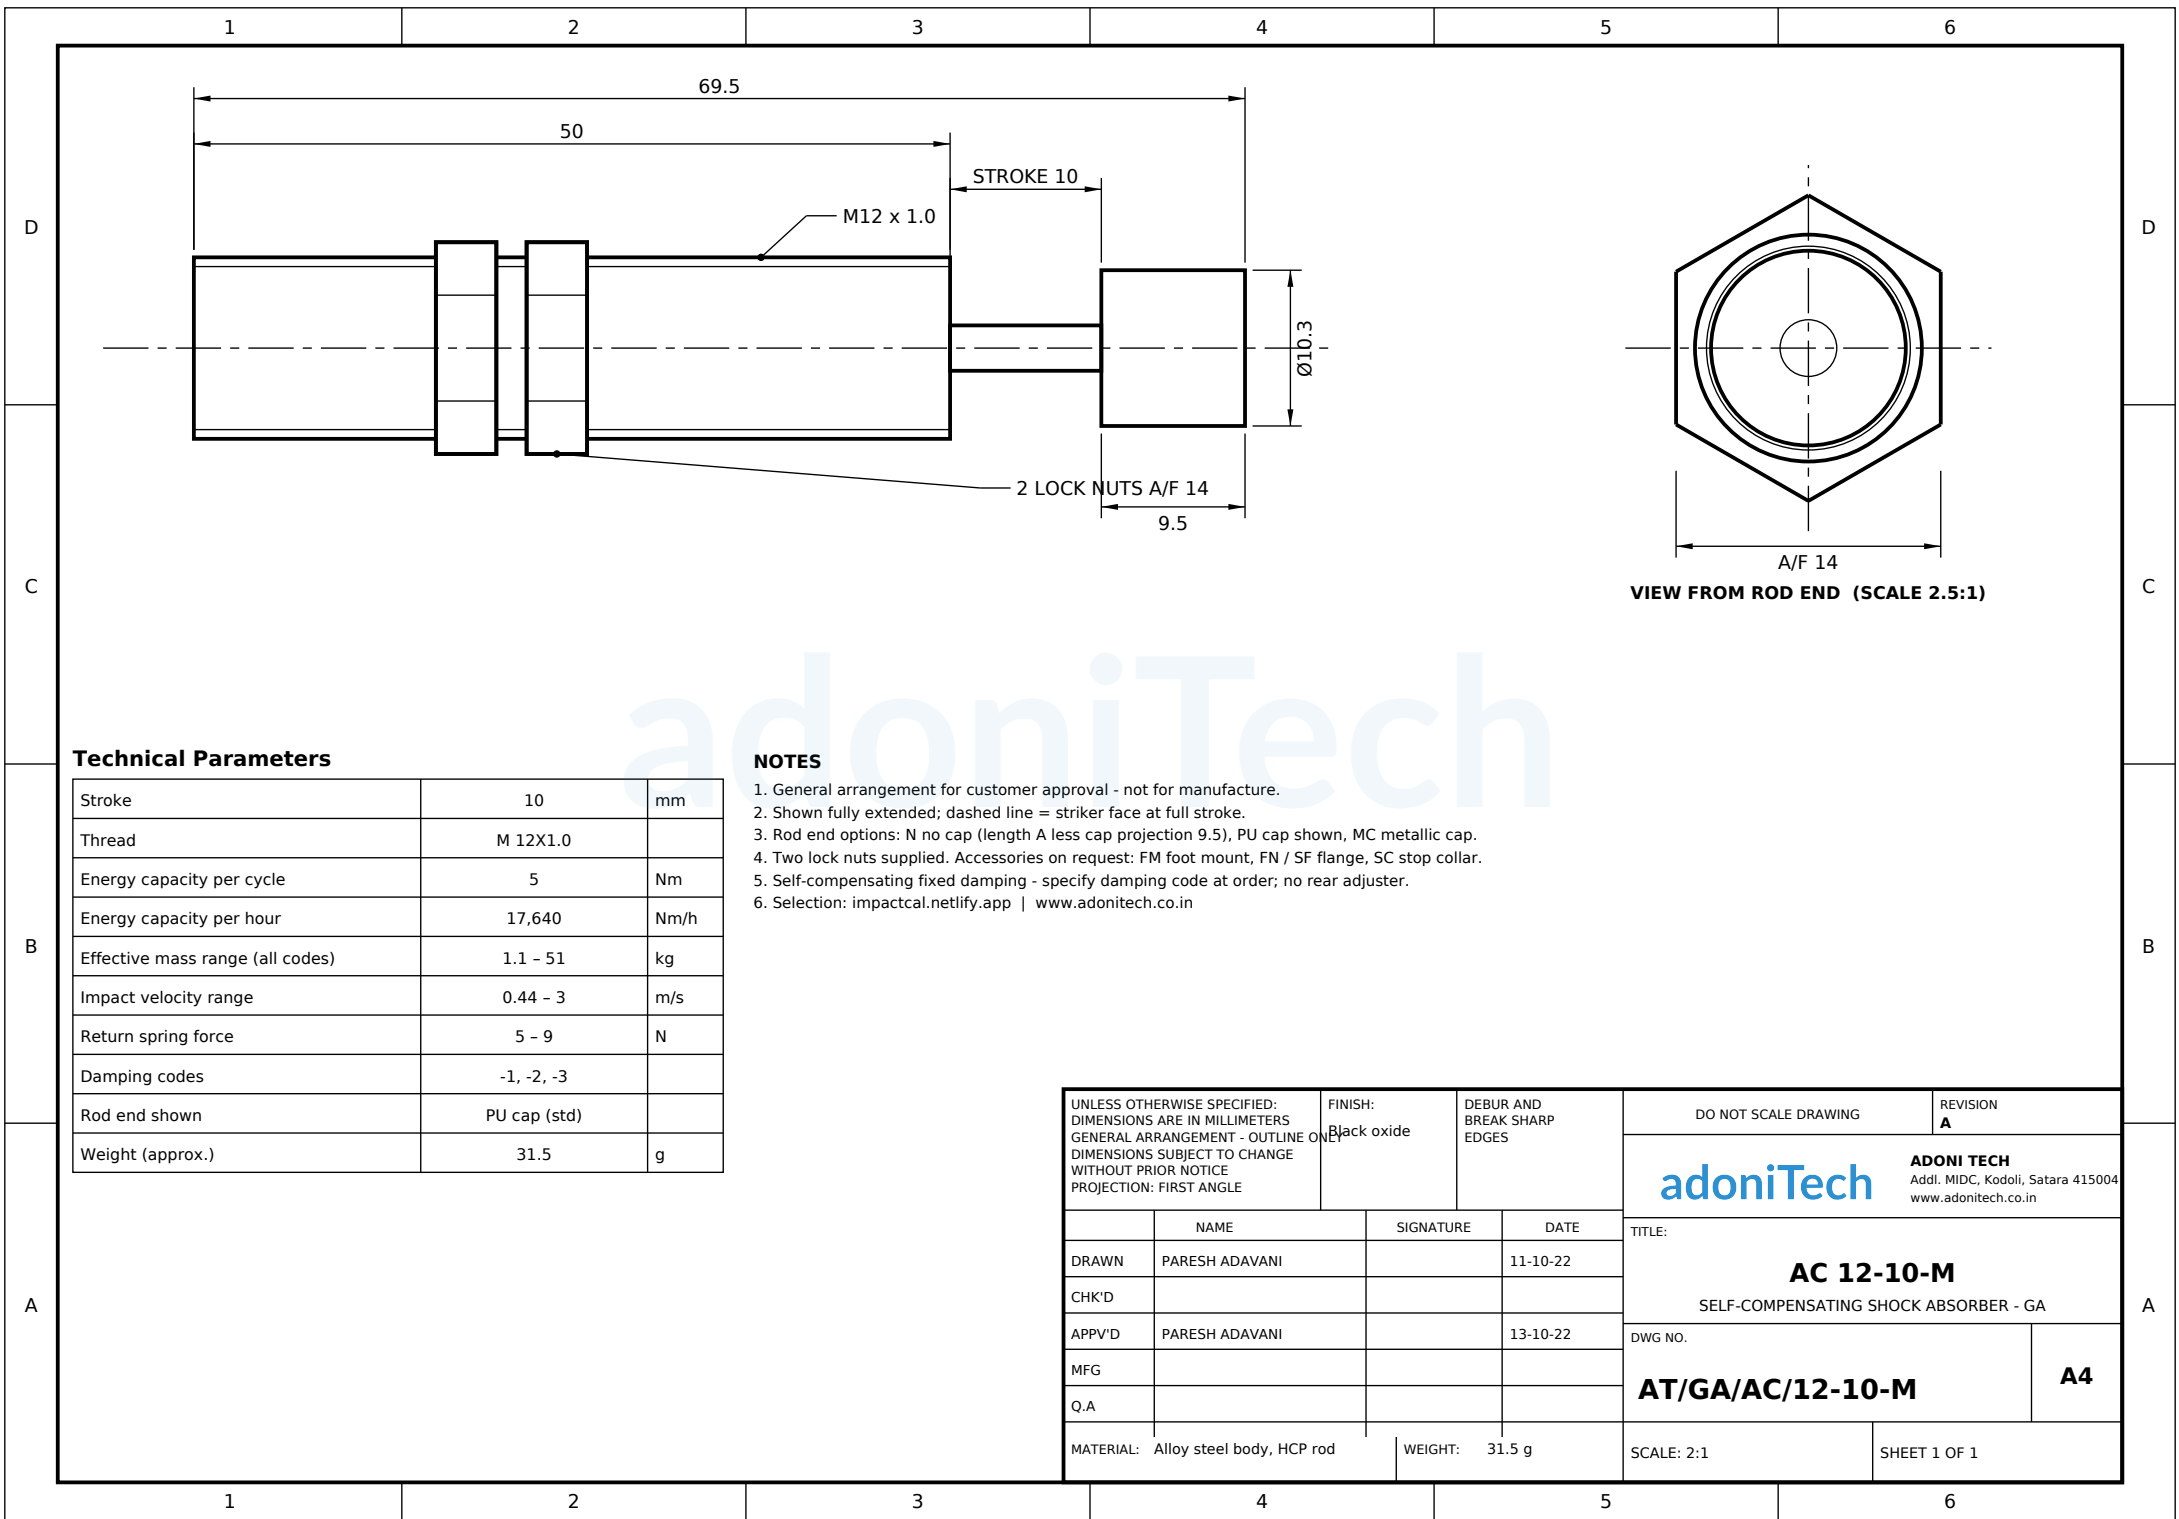

Technical Parameters

Stroke	10	mm
Thread	M 12X1.0	
Energy capacity per cycle	5	Nm
Energy capacity per hour	17,640	Nm/h
Effective mass range (all codes)	1.1 - 51	kg
Impact velocity range	0.44 - 3	m/s
Return spring force	5 - 9	N
Damping codes	-1, -2, -3	
Rod end shown	PU cap (std)	
Weight (approx.)	31.5	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 9.5), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in							
	NAME		SIGNATURE		DATE		TITLE: AC 12-10-M SELF-COMPENSATING SHOCK ABSORBER - GA		
DRAWN	PARESH ADAVANI				11-10-22				
CHK'D							DWG NO. AT/GA/AC/12-10-M A4		
APPV'D	PARESH ADAVANI				13-10-22				
MFG							SCALE: 2:1 SHEET 1 OF 1		
Q.A									
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 31.5 g						