
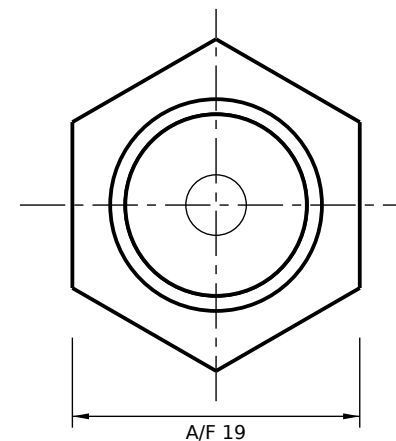


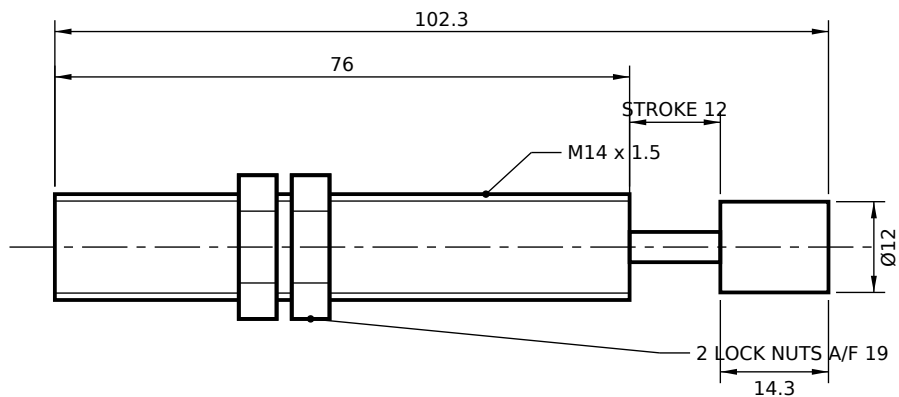

VIEW FROM ROD END (SCALE 2:1)

Technical Parameters

Stroke	12	mm
Thread	M 14X1.5	
Energy capacity per cycle	15	Nm
Energy capacity per hour	30,000	Nm/h
Effective mass range (all codes)	7.9 - 366	kg
Impact velocity range	0.29 - 1.95	m/s
Return spring force	4 - 8	N
Damping codes	-1, -2, -3	
Rod end shown	PU cap (std)	
Weight (approx.)	80	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 14.3), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		DRAWN PARESH ADAVANI		SIGNATURE		DATE 15-10-22		TITLE: AC 14-12-M SELF-COMPENSATING SHOCK ABSORBER - GA	
CHK'D								DWG NO.	
APPV'D PARESH ADAVANI								17-10-22	
MFG									
Q.A									
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 80 g		SCALE: 1:1		SHEET 1 OF 1		AT/GA/AC/14-12-M A4	