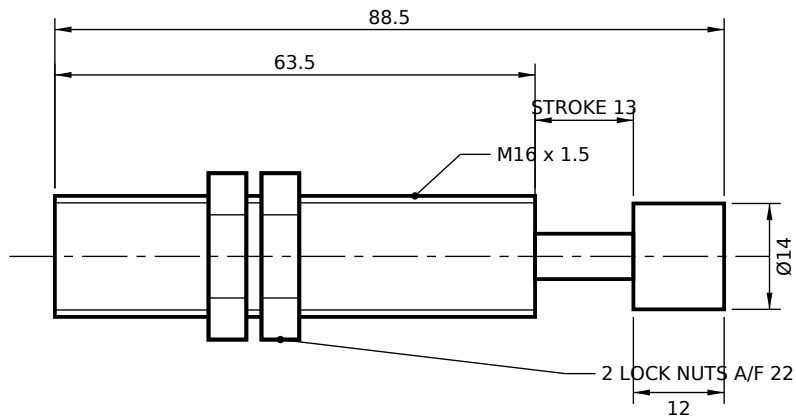


Technical Parameters

Stroke	13	mm
Thread	M 16X1.5	
Energy capacity per cycle	17	Nm
Energy capacity per hour	25,000	Nm/h
Effective mass range (all codes)	0.9 - 144	kg
Impact velocity range	0.49 - 6.1	m/s
Return spring force	4 - 11	N
Damping codes	-1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	105	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 12), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE				FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
								adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
	NAME		SIGNATURE		DATE		TITLE:				
DRAWN	PARESH ADAVANI				17-10-22		AC 16-13-M SELF-COMPENSATING SHOCK ABSORBER - GA				
CHK'D											
APPV'D	PARESH ADAVANI				19-10-22		DWG NO.				A4
MFG							AT/GA/AC/16-13-M				
Q.A											
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 105 g			SCALE: 1:1			SHEET 1 OF 1		