
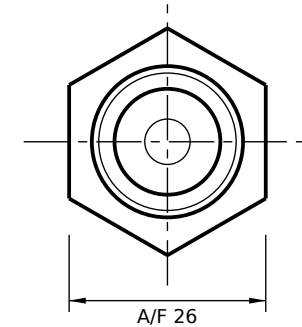


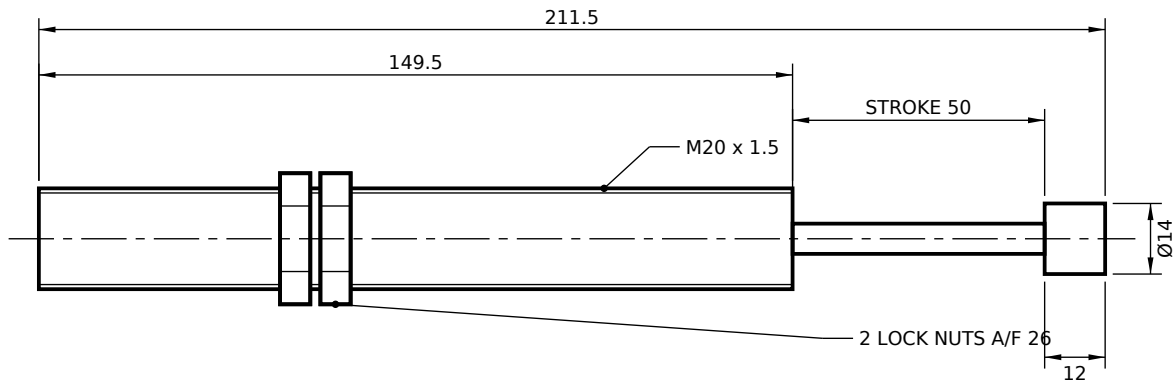

VIEW FROM ROD END (SCALE 1:1)

Technical Parameters

Stroke	50	mm
Thread	M 20X1.5	
Energy capacity per cycle	60	Nm
Energy capacity per hour	60,000	Nm/h
Effective mass range (all codes)	0.8 - 509	kg
Impact velocity range	0.49 - 12.2	m/s
Return spring force	6 - 17	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	219	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 12), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE				FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
								adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
	NAME				SIGNATURE				TITLE: AC 20-50-M SELF-COMPENSATING SHOCK ABSORBER - GA DWG NO. AT/GA/AC/20-50-M A4		
DRAWN	PARESH ADAVANI						21-10-22				
CHK'D											
APPV'D	PARESH ADAVANI						23-10-22				
MFG											
Q.A											
MATERIAL: Alloy steel body, HCP rod				WEIGHT: 219 g				SCALE: 1:1.5		SHEET 1 OF 1	