


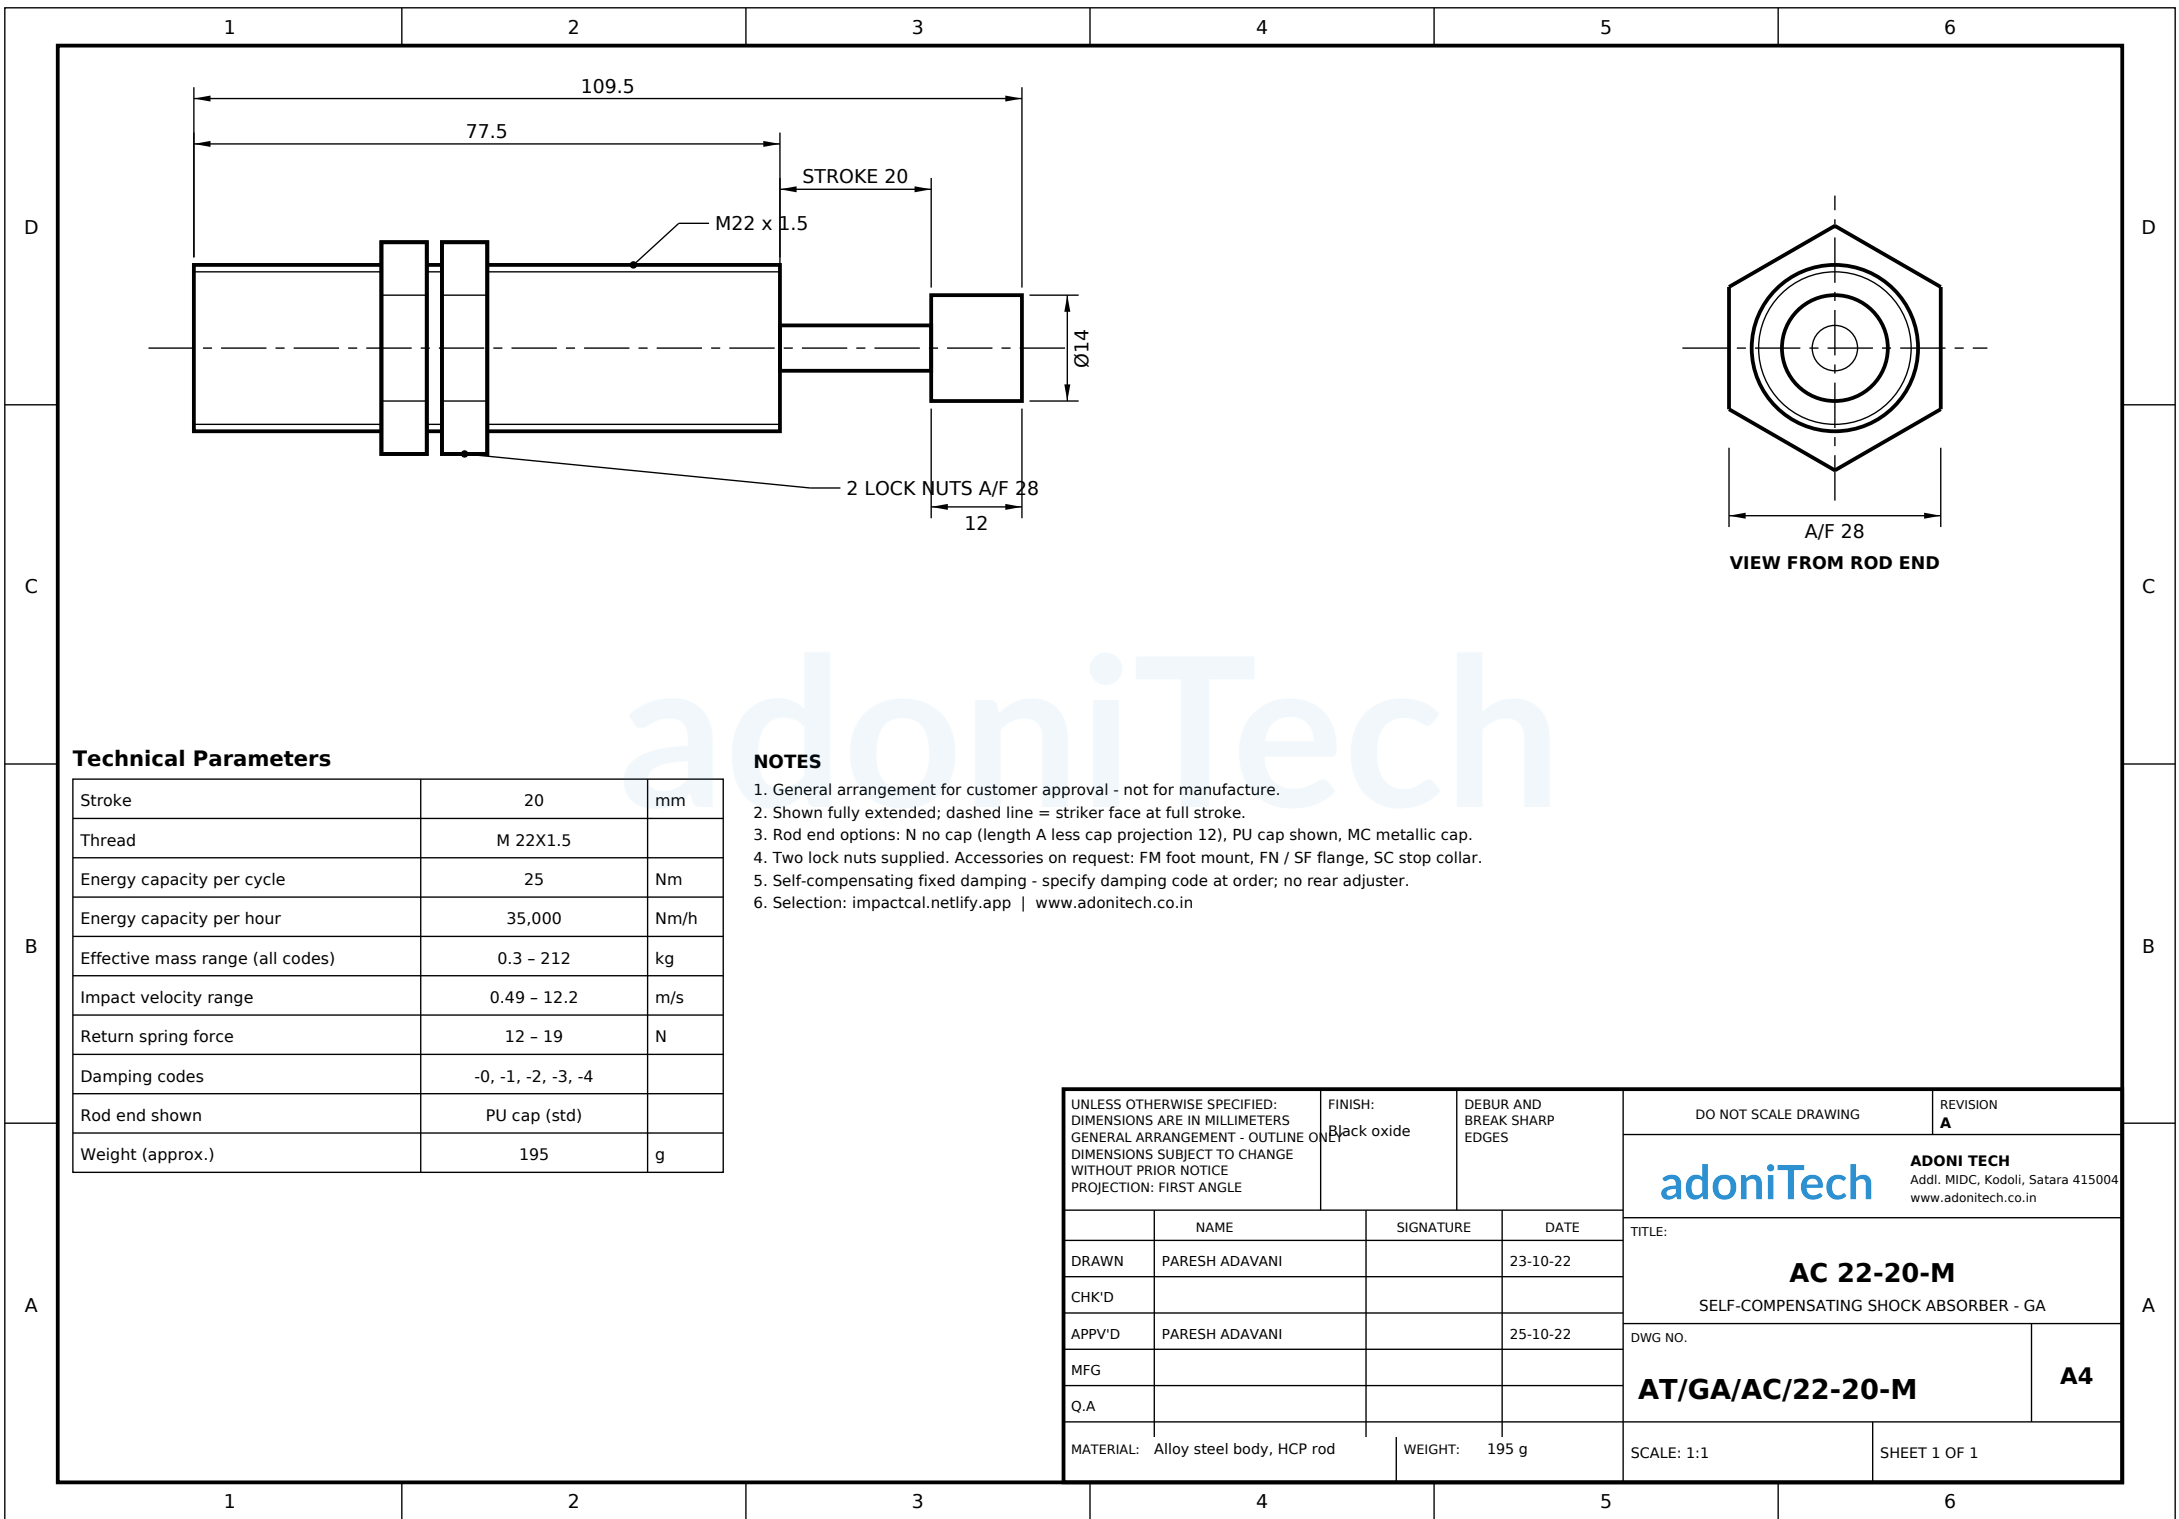

Technical Parameters

Stroke	20	mm
Thread	M 22X1.5	
Energy capacity per cycle	25	Nm
Energy capacity per hour	35,000	Nm/h
Effective mass range (all codes)	0.3 - 212	kg
Impact velocity range	0.49 - 12.2	m/s
Return spring force	12 - 19	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	195	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 12), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: [impactcal.netlify.app](#) | [www.adonitech.co.in](#)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
						adoniTech		ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
NAME		SIGNATURE		DATE		TITLE:			
DRAWN		PARESH ADAVANI		23-10-22		AC 22-20-M SELF-COMPENSATING SHOCK ABSORBER - GA			
CHK'D									
APPV'D		PARESH ADAVANI		25-10-22		DWG NO. AT/GA/AC/22-20-M			
MFG									
Q.A						A4			
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 195 g		SCALE: 1:1					