
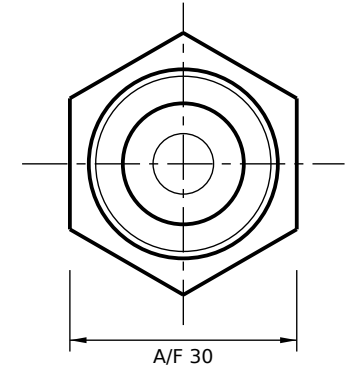


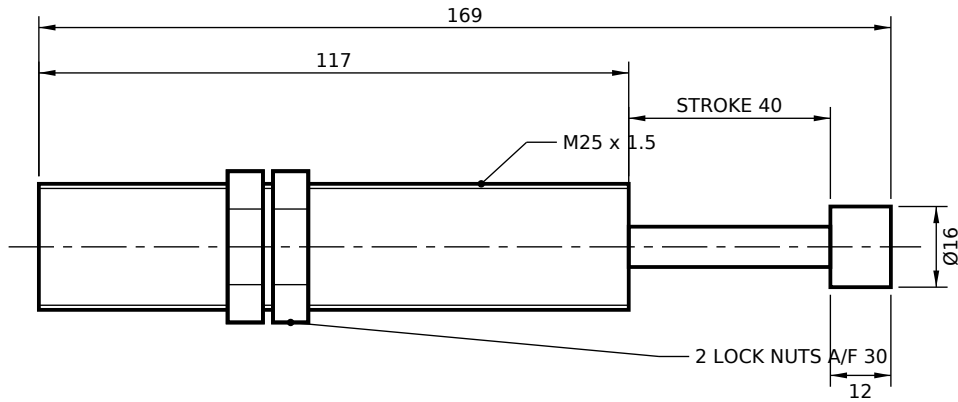

VIEW FROM ROD END (SCALE 1:1)

Technical Parameters

Stroke	40	mm
Thread	M 25X1.5	
Energy capacity per cycle	130	Nm
Energy capacity per hour	117,000	Nm/h
Effective mass range (all codes)	1.7 - 1,100	kg
Impact velocity range	0.49 - 12.2	m/s
Return spring force	6 - 17	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	395	g

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker face at full stroke.
- Rod end options: N no cap (length A less cap projection 12), PU cap shown, MC metallic cap.
- Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
- Self-compensating fixed damping - specify damping code at order; no rear adjuster.
- Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in							
	NAME		SIGNATURE		DATE		TITLE: AC 25-40-M SELF-COMPENSATING SHOCK ABSORBER - GA		
DRAWN	PARESH ADAVANI				27-10-22				
CHK'D									
APPV'D	PARESH ADAVANI				29-10-22				
MFG									
Q.A							DWG NO. AT/GA/AC/25-40-M		A4
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 395 g			SCALE: 1:1.5		SHEET 1 OF 1	