


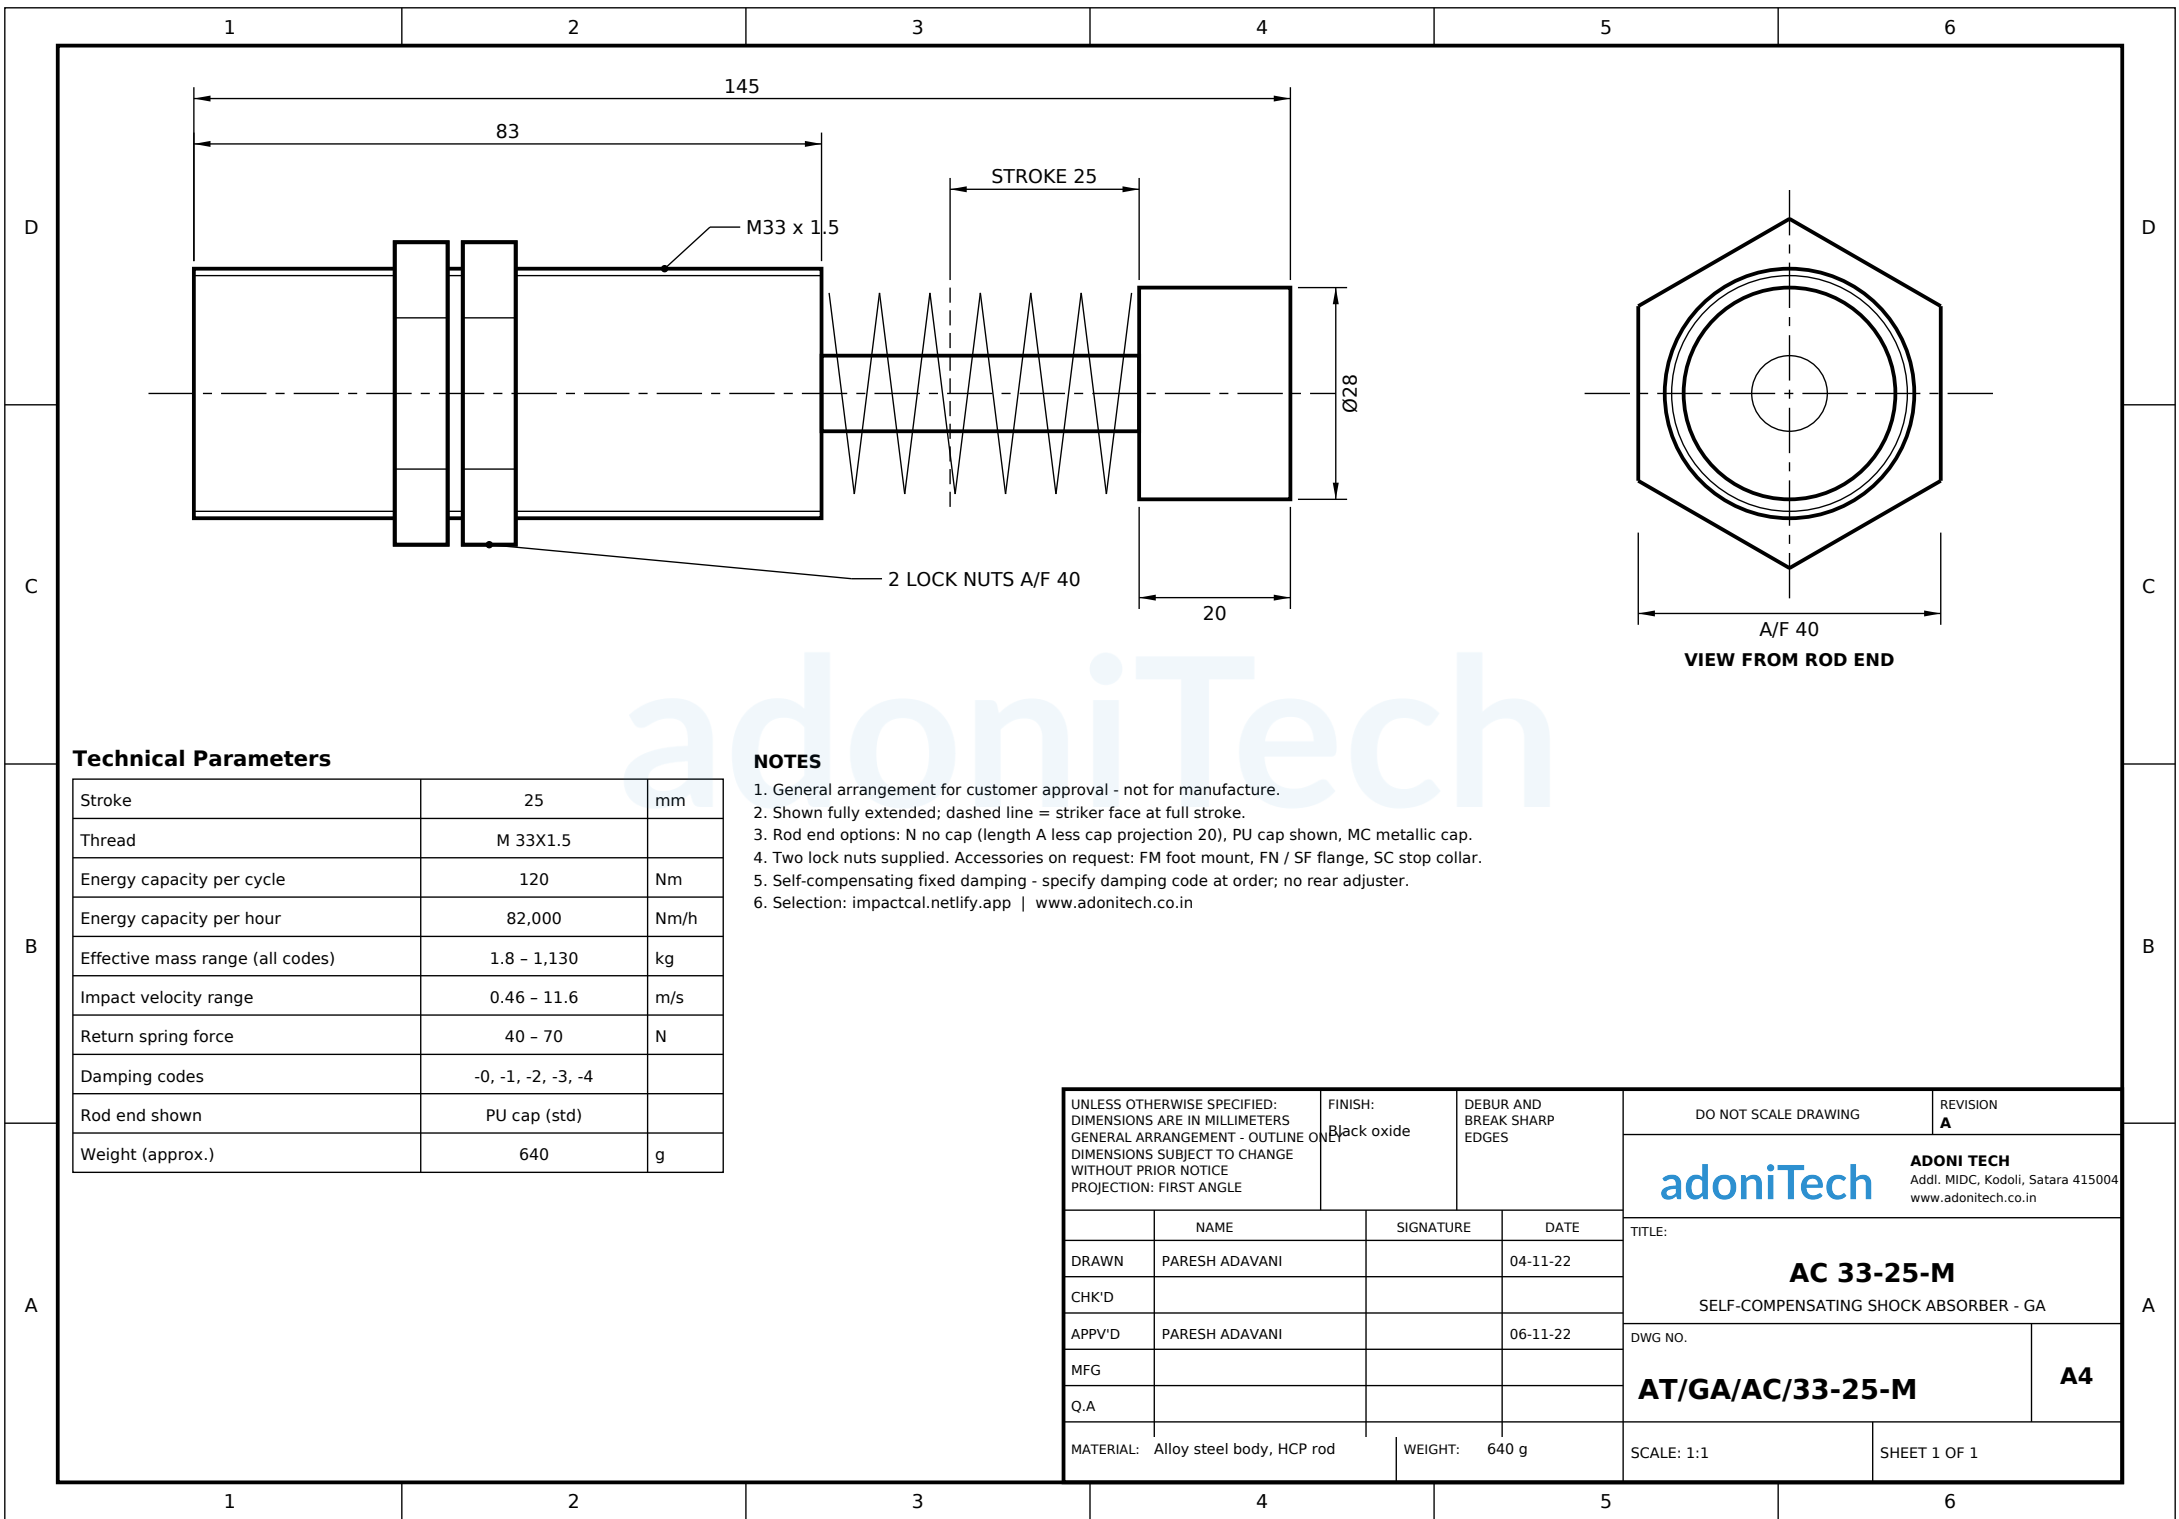

Technical Parameters

Stroke	25	mm
Thread	M 33X1.5	
Energy capacity per cycle	120	Nm
Energy capacity per hour	82,000	Nm/h
Effective mass range (all codes)	1.8 - 1,130	kg
Impact velocity range	0.46 - 11.6	m/s
Return spring force	40 - 70	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	640	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: [impactcal.netlify.app](#) | [www.adonitech.co.in](#)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION A
				adoniTech		ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in
	NAME	SIGNATURE	DATE	TITLE: AC 33-25-M SELF-COMPENSATING SHOCK ABSORBER - GA		
DRAWN	PARESH ADAVANI		04-11-22			
CHK'D				DWG NO. AT/GA/AC/33-25-M		
APPV'D	PARESH ADAVANI		06-11-22			
MFG				A4		
Q.A						
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 640 g		SCALE: 1:1		SHEET 1 OF 1