
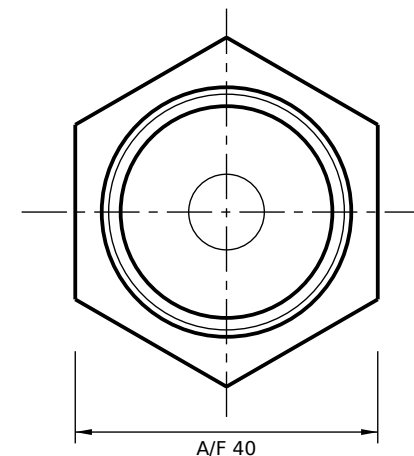


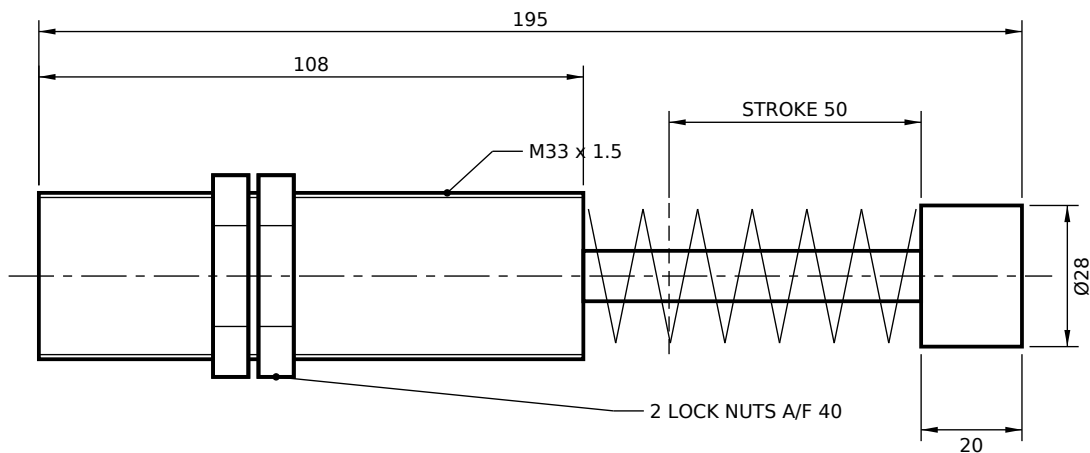

VIEW FROM ROD END (SCALE 1:1)

Technical Parameters

Stroke	50	mm
Thread	M 33X1.5	
Energy capacity per cycle	250	Nm
Energy capacity per hour	97,000	Nm/h
Effective mass range (all codes)	3.7 - 2,350	kg
Impact velocity range	0.46 - 11.6	m/s
Return spring force	45 - 80	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	655	g

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker face at full stroke.
- Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
- Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
- Self-compensating fixed damping - specify damping code at order; no rear adjuster.
- Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
						ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
NAME		SIGNATURE		DATE		TITLE:			
DRAWN PARESH ADAVANI				06-11-22		AC 33-50-M SELF-COMPENSATING SHOCK ABSORBER - GA			
CHK'D									
APPV'D PARESH ADAVANI				08-11-22		DWG NO.			
MFG						AT/GA/AC/33-50-M			
Q.A									
MATERIAL: Alloy steel body, HCP rod				WEIGHT: 655 g		SCALE: 1:1.5		SHEET 1 OF 1	