
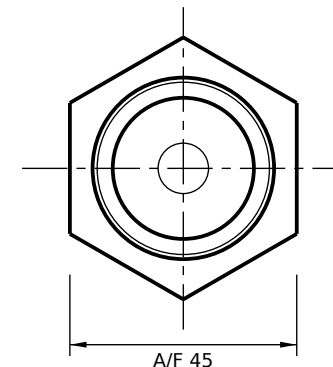


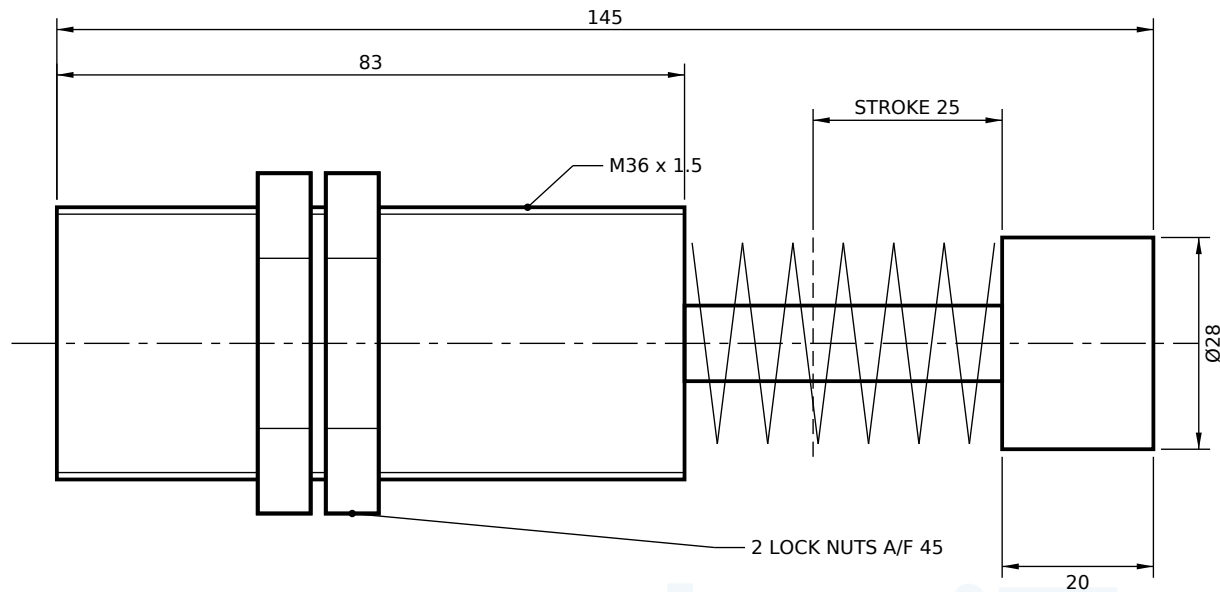

VIEW FROM ROD END (SCALE 1:1.5)

Technical Parameters

Stroke	25	mm
Thread	M 36X1.5	
Energy capacity per cycle	120	Nm
Energy capacity per hour	82,000	Nm/h
Effective mass range (all codes)	1.8 - 1,130	kg
Impact velocity range	0.46 - 11.6	m/s
Return spring force	40 - 70	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	640	g

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker face at full stroke.
- Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
- Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
- Self-compensating fixed damping - specify damping code at order; no rear adjuster.
- Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A			
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in					
	NAME		SIGNATURE		DATE					TITLE: AC 36-25-M SELF-COMPENSATING SHOCK ABSORBER - GA	
DRAWN	PARESH ADAVANI				08-11-22						
CHK'D											
APPV'D	PARESH ADAVANI				10-11-22						
MFG											
Q.A							DWG NO.		AT/GA/AC/36-25-M		A4
MATERIAL: Alloy steel body, HCP rod				WEIGHT: 640 g		SCALE: 1:1		SHEET 1 OF 1			