
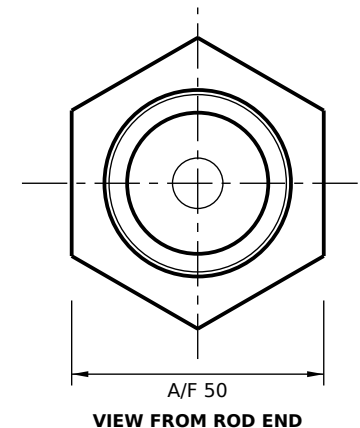


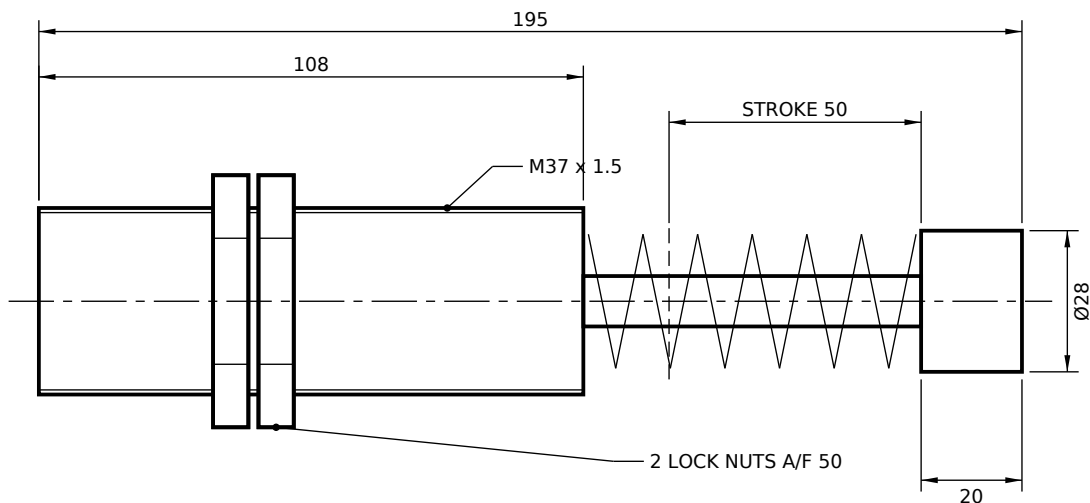

## Technical Parameters

|                                  |                    |      |
|----------------------------------|--------------------|------|
| Stroke                           | 50                 | mm   |
| Thread                           | M 37X1.5           |      |
| Energy capacity per cycle        | 250                | Nm   |
| Energy capacity per hour         | 97,000             | Nm/h |
| Effective mass range (all codes) | 3.7 - 2,350        | kg   |
| Impact velocity range            | 0.46 - 11.6        | m/s  |
| Return spring force              | 45 - 80            | N    |
| Damping codes                    | -0, -1, -2, -3, -4 |      |
| Rod end shown                    | PU cap (std)       |      |
| Weight (approx.)                 | 660                | g    |

## NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: [impactcal.netlify.app](http://impactcal.netlify.app) | [www.adonitech.co.in](http://www.adonitech.co.in)

|                                                                                                                                                                                       |  |                |  |                        |  |                                   |  |                                                     |  |                                                                        |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------|--|------------------------|--|-----------------------------------|--|-----------------------------------------------------|--|------------------------------------------------------------------------|--|
| UNLESS OTHERWISE SPECIFIED:<br>DIMENSIONS ARE IN MILLIMETERS<br>GENERAL ARRANGEMENT - OUTLINE ONLY<br>DIMENSIONS SUBJECT TO CHANGE<br>WITHOUT PRIOR NOTICE<br>PROJECTION: FIRST ANGLE |  |                |  | FINISH:<br>Black oxide |  | DEBUR AND<br>BREAK SHARP<br>EDGES |  | DO NOT SCALE DRAWING                                |  | REVISION<br>A                                                          |  |
|                                                                                                                                                                                       |  |                |  |                        |  |                                   |  |                                                     |  | ADONI TECH<br>Addl. MIDC, Kodoli, Satara 415004<br>www.adonitech.co.in |  |
|                                                                                                                                                                                       |  | NAME           |  | SIGNATURE              |  | DATE                              |  | TITLE:                                              |  |                                                                        |  |
| DRAWN                                                                                                                                                                                 |  | PARESH ADAVANI |  |                        |  | 14-11-22                          |  | AC 37-50-M<br>SELF-COMPENSATING SHOCK ABSORBER - GA |  |                                                                        |  |
| CHK'D                                                                                                                                                                                 |  |                |  |                        |  |                                   |  |                                                     |  |                                                                        |  |
| APPV'D                                                                                                                                                                                |  | PARESH ADAVANI |  |                        |  | 16-11-22                          |  | DWG NO.                                             |  |                                                                        |  |
| MFG                                                                                                                                                                                   |  |                |  |                        |  |                                   |  | AT/GA/AC/37-50-M                                    |  |                                                                        |  |
| Q.A                                                                                                                                                                                   |  |                |  |                        |  |                                   |  |                                                     |  |                                                                        |  |
| MATERIAL: Alloy steel body, HCP rod                                                                                                                                                   |  |                |  | WEIGHT: 660 g          |  | SCALE: 1:1.5                      |  |                                                     |  | SHEET 1 OF 1                                                           |  |
| A4                                                                                                                                                                                    |  |                |  |                        |  |                                   |  |                                                     |  |                                                                        |  |