
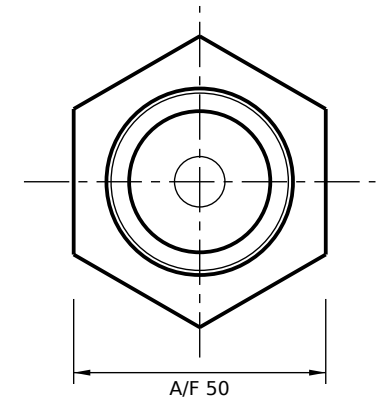


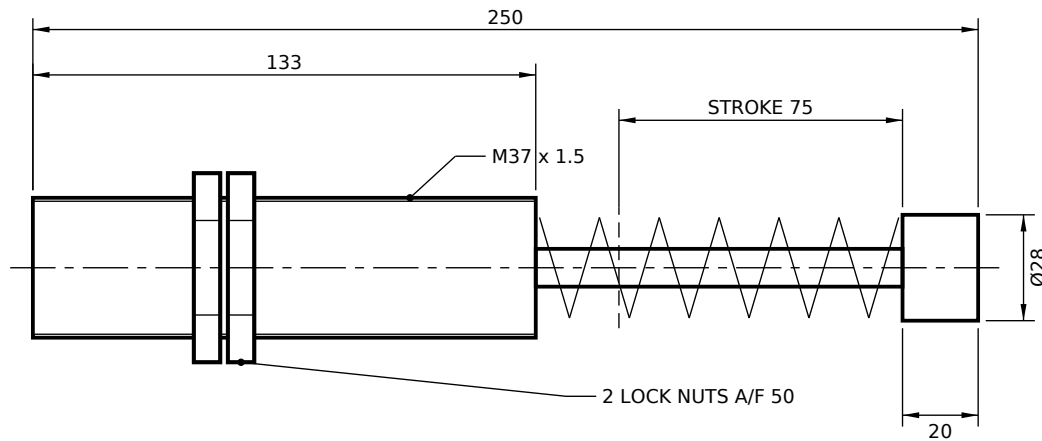

VIEW FROM ROD END (SCALE 1:1.5)

Technical Parameters

Stroke	75	mm
Thread	M 37X1.5	
Energy capacity per cycle	380	Nm
Energy capacity per hour	120,000	Nm/h
Effective mass range (all codes)	5.6 - 3,560	kg
Impact velocity range	0.46 - 11.6	m/s
Return spring force	45 - 80	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	680	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE				FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A			
								adoniTech				ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
	NAME			SIGNATURE			DATE			TITLE: AC 37-75-M SELF-COMPENSATING SHOCK ABSORBER - GA			
DRAWN	PARESH ADAVANI						16-11-22						
CHK'D										DWG NO. AT/GA/AC/37-75-M			
APPV'D	PARESH ADAVANI						18-11-22						
MFG										A4			
Q.A													
MATERIAL: Alloy steel body, HCP rod				WEIGHT: 680 g				SCALE: 1:2			SHEET 1 OF 1		