
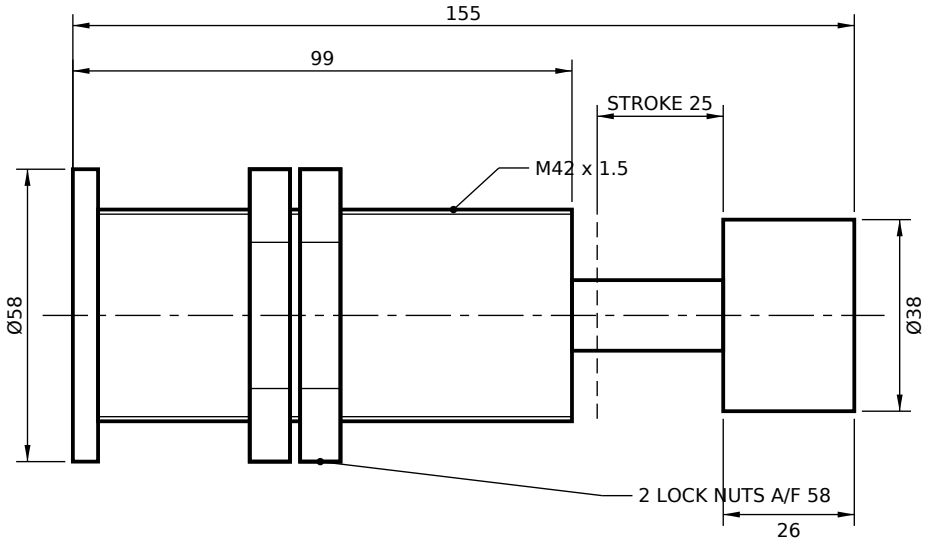


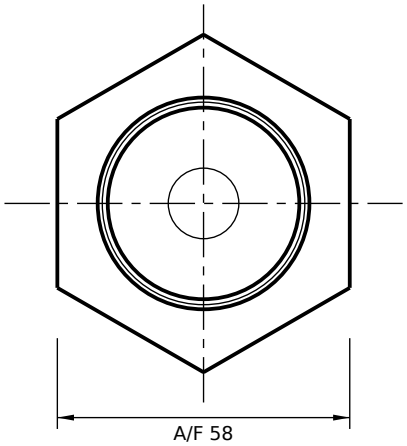

VIEW FROM ROD END

Technical Parameters

Stroke	25	mm
Thread	M 42X1.5	
Energy capacity per cycle	250	Nm
Energy capacity per hour	132,000	Nm/h
Effective mass range (all codes)	4.1 – 2,610	kg
Impact velocity range	0.44 – 11	m/s
Return spring force	60 – 90	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	1200	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 26), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

adoniTech

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE	FINISH: Black oxide	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING / REVISION A

	NAME	SIGNATURE	DATE
DRAWN	PARESH ADAVANI		18-11-22
CHK'D			
APPV'D	PARESH ADAVANI		20-11-22
MFG			
Q.A			

MATERIAL: Alloy steel body, HCP rod | WEIGHT: 1200 g

adoniTech

ADONI TECH
Addl. MIDC, Kodoli, Satara 415004
www.adonitech.co.in

TITLE:

AC 42-25-M

SELF-COMPENSATING SHOCK ABSORBER - GA

DWG NO. **AT/GA/AC/42-25-M** | **A4**

SCALE: 1:1.5 | SHEET 1 OF 1