
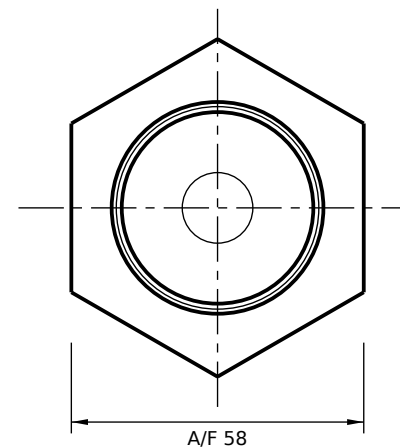


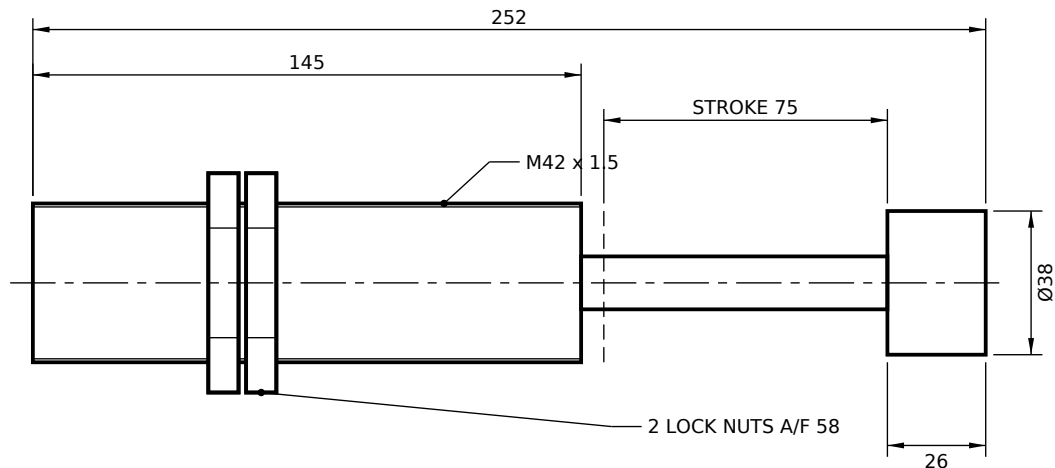

VIEW FROM ROD END (SCALE 1:1.5)

Technical Parameters

Stroke	75	mm
Thread	M 42X1.5	
Energy capacity per cycle	750	Nm
Energy capacity per hour	190,000	Nm/h
Effective mass range (all codes)	12.0 - 7,820	kg
Impact velocity range	0.44 - 11	m/s
Return spring force	50 - 140	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	1900	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 26), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE				FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
										adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
	NAME			SIGNATURE		DATE		TITLE:			
DRAWN	PARESH ADAVANI					22-11-22		AC 42-75-M SELF-COMPENSATING SHOCK ABSORBER - GA			
CHK'D											
APPV'D	PARESH ADAVANI					24-11-22		DWG NO.		A4	
MFG								AT/GA/AC/42-75-M			
Q.A											
MATERIAL: Alloy steel body, HCP rod				WEIGHT: 1900 g		SCALE: 1:2				SHEET 1 OF 1	