


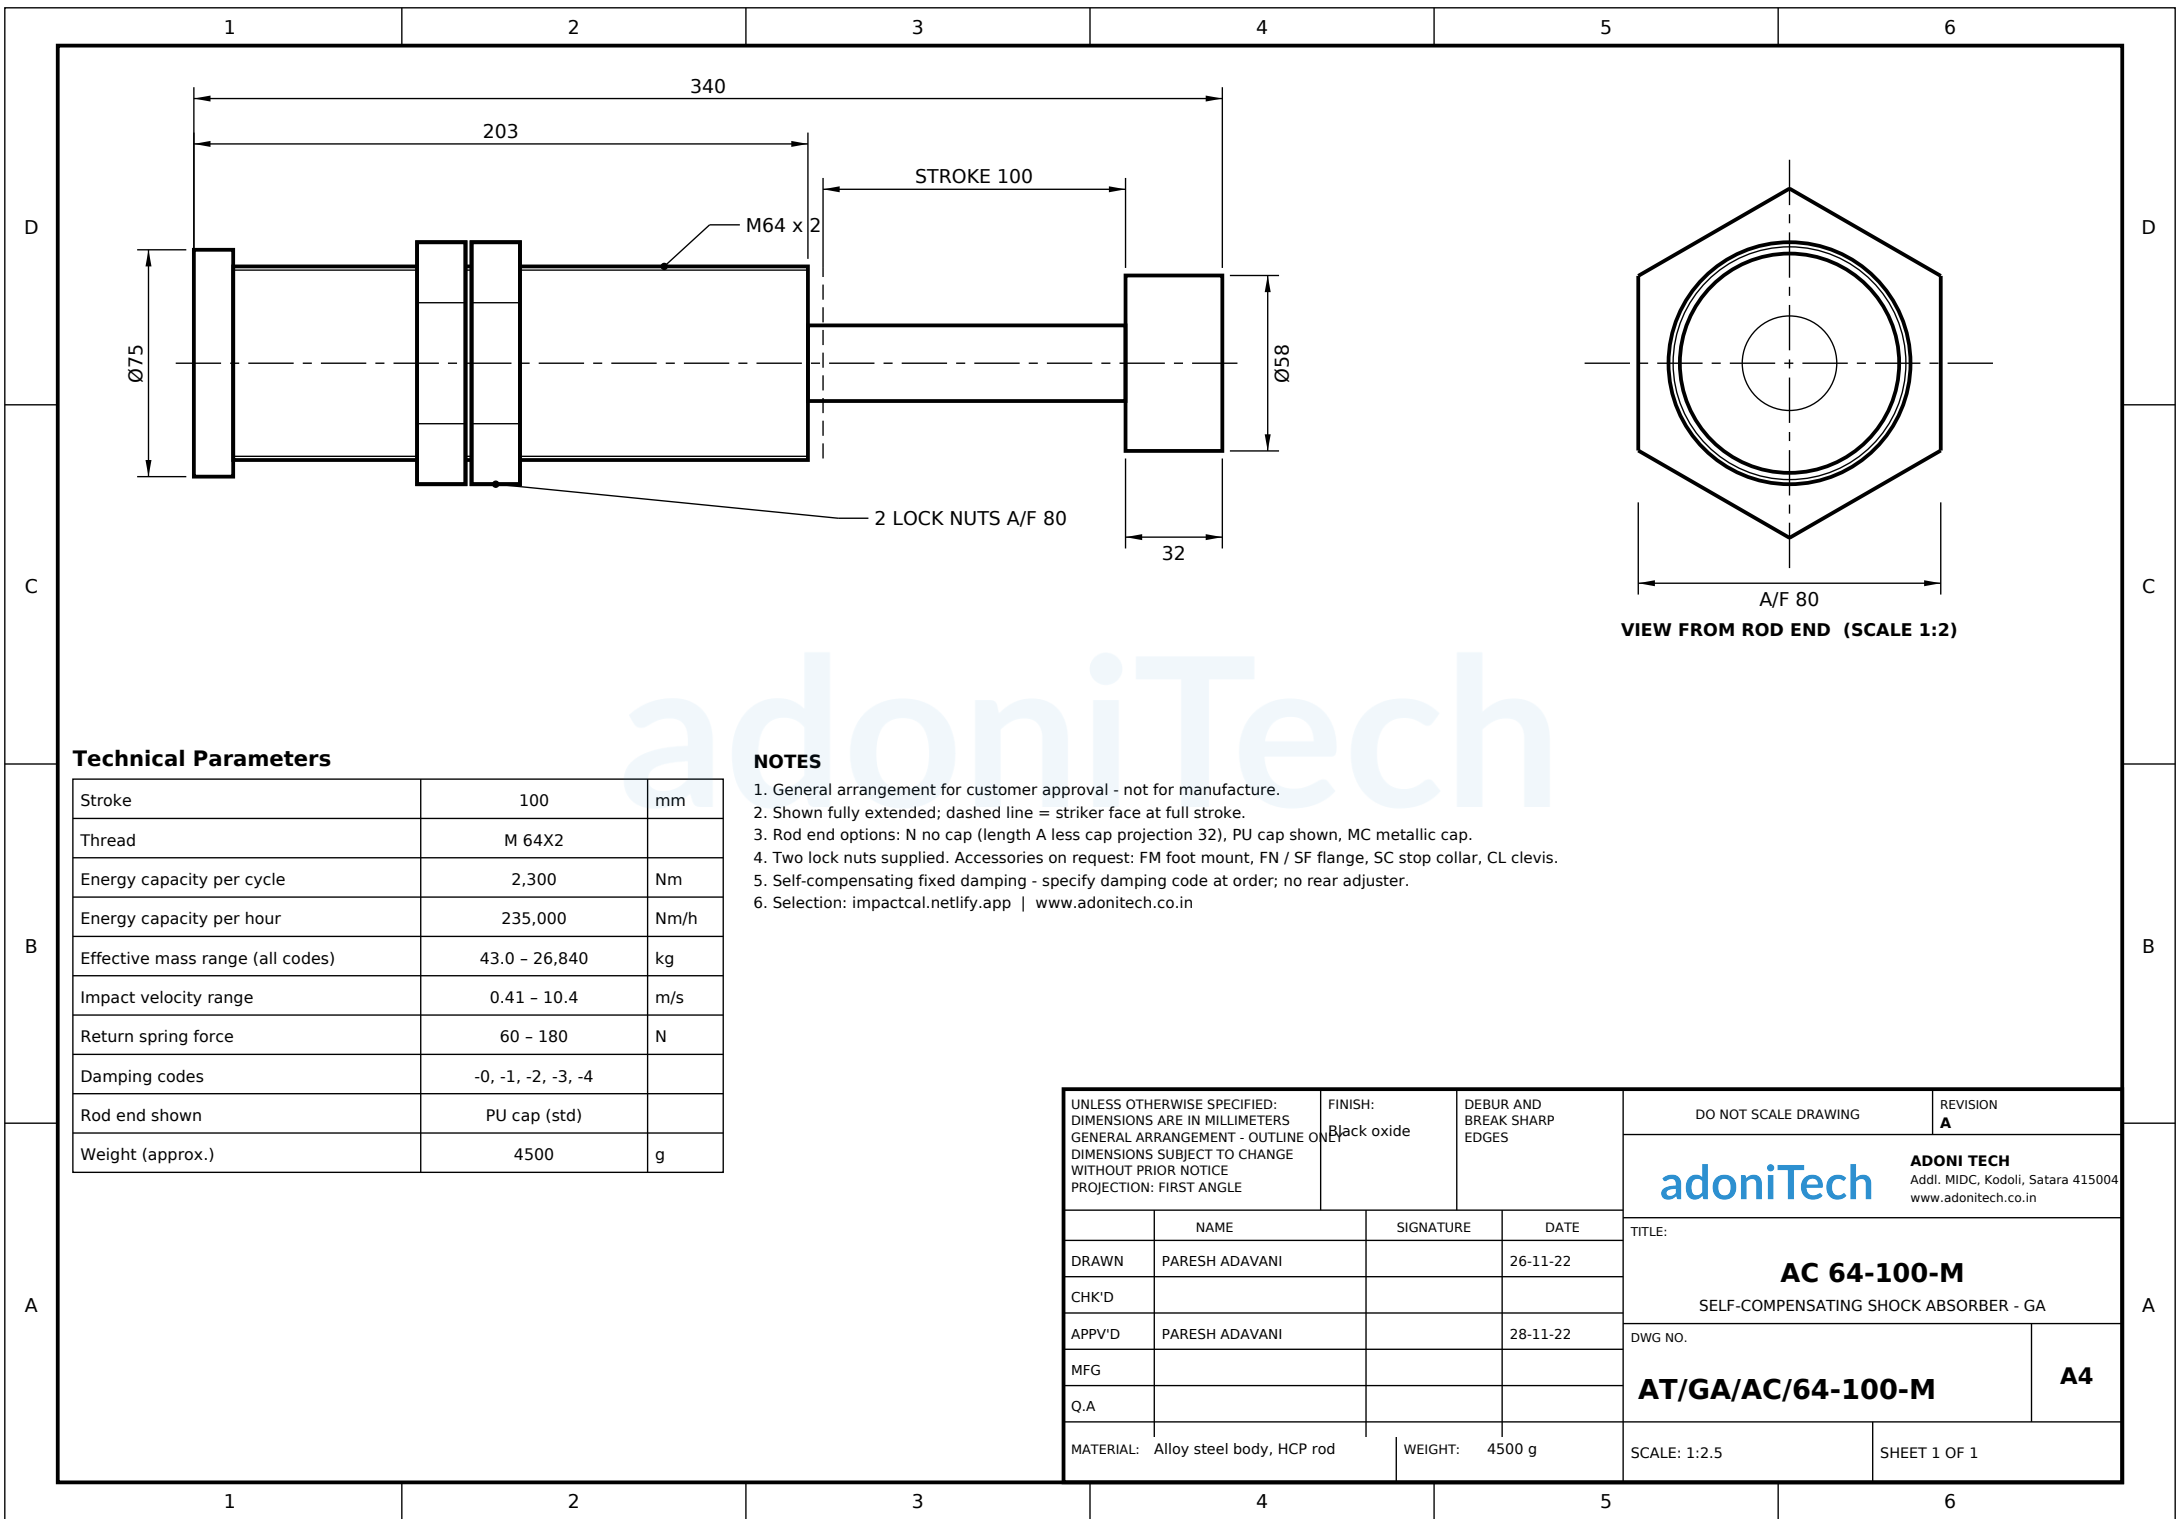

Technical Parameters

Stroke	100	mm
Thread	M 64X2	
Energy capacity per cycle	2,300	Nm
Energy capacity per hour	235,000	Nm/h
Effective mass range (all codes)	43.0 - 26,840	kg
Impact velocity range	0.41 - 10.4	m/s
Return spring force	60 - 180	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	4500	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 32), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: [impactcal.netlify.app](#) | [www.adonitech.co.in](#)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in								
	NAME		SIGNATURE		DATE		TITLE: AC 64-100-M SELF-COMPENSATING SHOCK ABSORBER - GA			
DRAWN	PARESH ADAVANI				26-11-22					
CHK'D							DWG NO. AT/GA/AC/64-100-M A4			
APPV'D	PARESH ADAVANI				28-11-22					
MFG							SCALE: 1:2.5 SHEET 1 OF 1			
Q.A										
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 4500 g							