


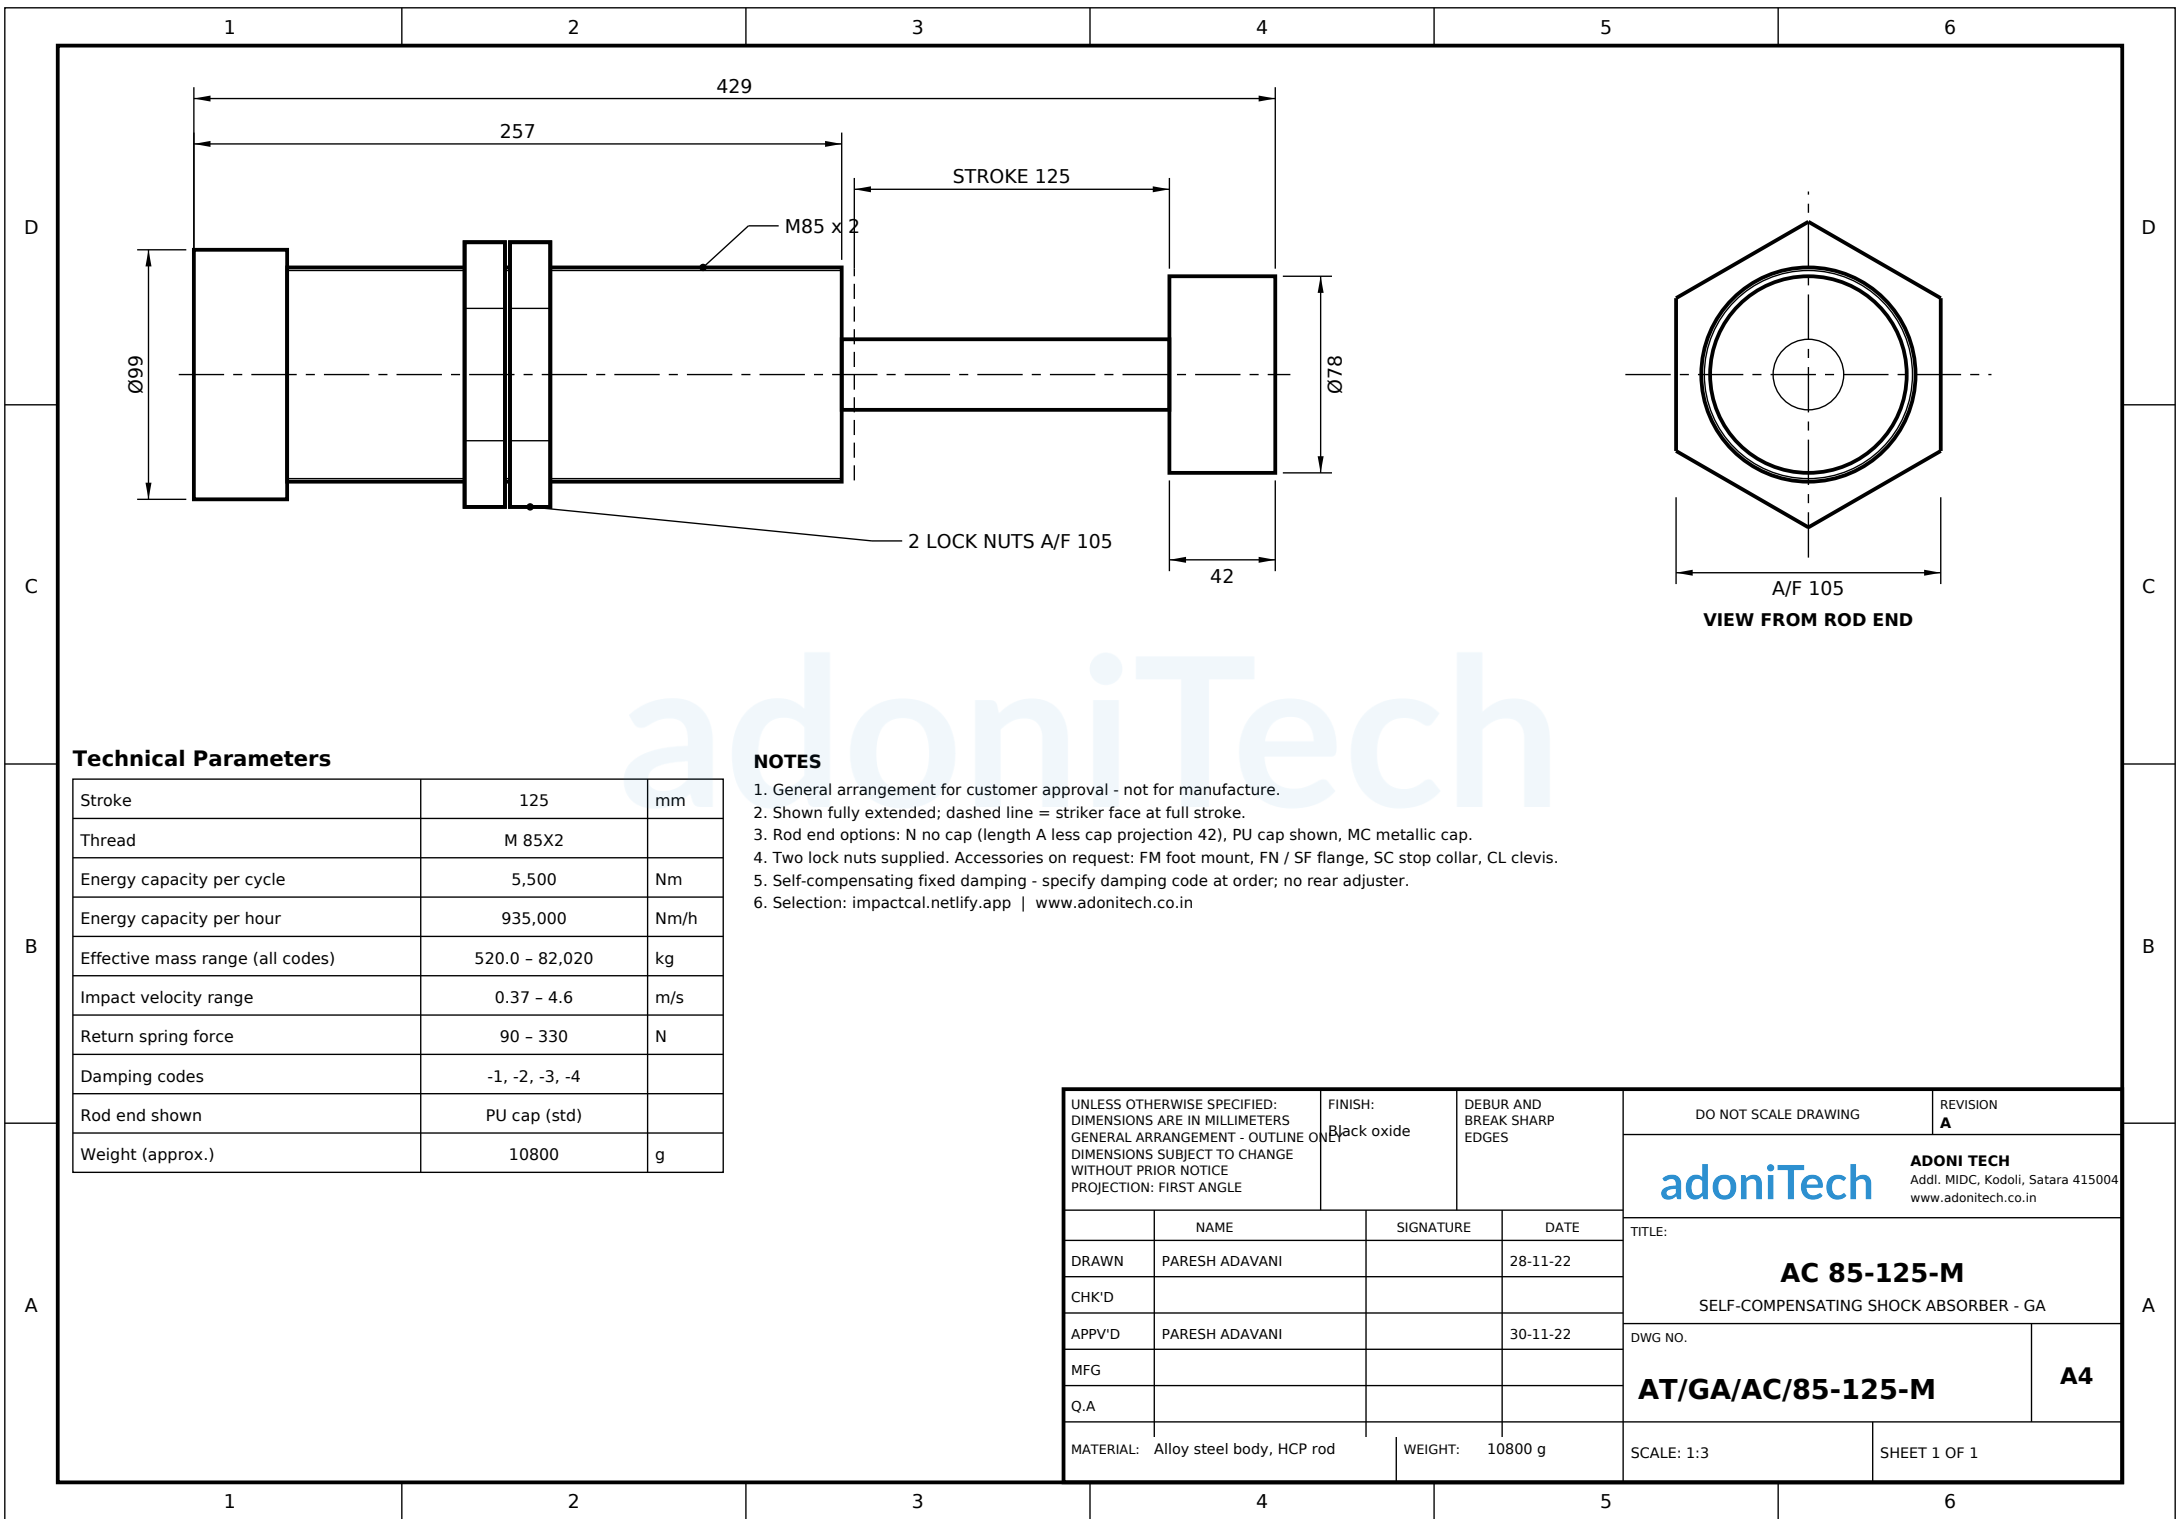

Technical Parameters

Stroke	125	mm
Thread	M 85X2	
Energy capacity per cycle	5,500	Nm
Energy capacity per hour	935,000	Nm/h
Effective mass range (all codes)	520.0 - 82,020	kg
Impact velocity range	0.37 - 4.6	m/s
Return spring force	90 - 330	N
Damping codes	-1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	10800	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 42), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION A	
				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
				TITLE: AC 85-125-M SELF-COMPENSATING SHOCK ABSORBER - GA DWG NO. AT/GA/AC/85-125-M A4			
NAME	SIGNATURE	DATE					
DRAWN	PARESH ADAVANI		28-11-22				
CHK'D							
APP'V'D	PARESH ADAVANI		30-11-22				
MFG							
Q.A							
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 10800 g	SCALE: 1:3		SHEET 1 OF 1	