
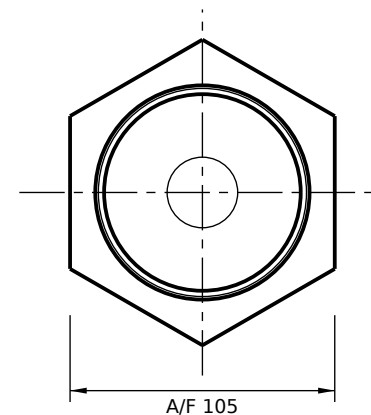


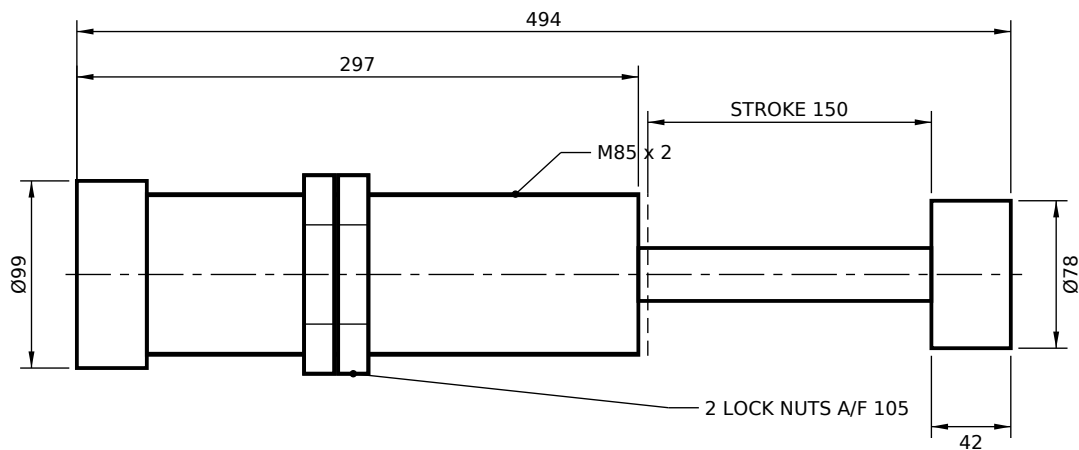

VIEW FROM ROD END (SCALE 1:3)

Technical Parameters

Stroke	150	mm
Thread	M 85X2	
Energy capacity per cycle	6,000	Nm
Energy capacity per hour	1,500,000	Nm/h
Effective mass range (all codes)	567.0 - 89,480	kg
Impact velocity range	0.37 - 4.6	m/s
Return spring force	90 - 330	N
Damping codes	-1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	10470	g

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker face at full stroke.
- Rod end options: N no cap (length A less cap projection 42), PU cap shown, MC metallic cap.
- Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
- Self-compensating fixed damping - specify damping code at order; no rear adjuster.
- Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in TITLE: AC 85-150-M SELF-COMPENSATING SHOCK ABSORBER - GA DWG NO. AT/GA/AC/85-150-M A4				
	NAME		SIGNATURE		DATE					
DRAWN	PARESH ADAVANI				30-11-22					
CHK'D										
APPV'D	PARESH ADAVANI				02-12-22					
MFG										
Q.A										
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 10470 g		SCALE: 1:4						SHEET 1 OF 1