

D

C

B


A

D

C

B

A

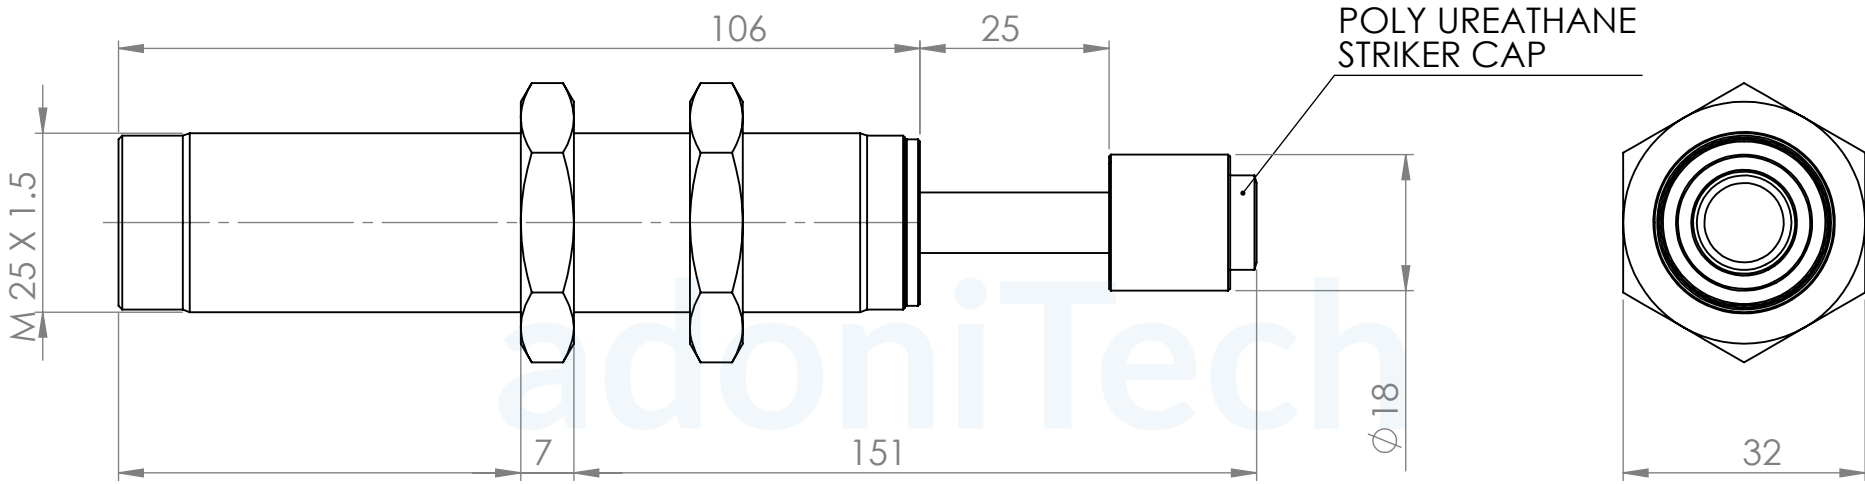

TECHNICAL SPECS

STROKE- 25 MM
THREADING M 25 X 1.5
ENERGY CAPACITY- 160 nm max
RANGE- 30-160 NM MAX NO
STROKES PER HR- 7200
UREATHANE STRIKER CAP

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:				FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
								ADONI TECH			
DRAWN				NAME		SIGNATURE		DATE		TITLE: SINGLE ACTING HYDRAULIC SHOCK ABSORBER WITH FIXED HARDNESS	
CHK'D											
APPV'D											
MFG											
Q.A								MATERIAL:		DWG NO. ACX-25-25-M	
										A4	
								WEIGHT:		SCALE:1:2	
										SHEET 1 OF 1	