


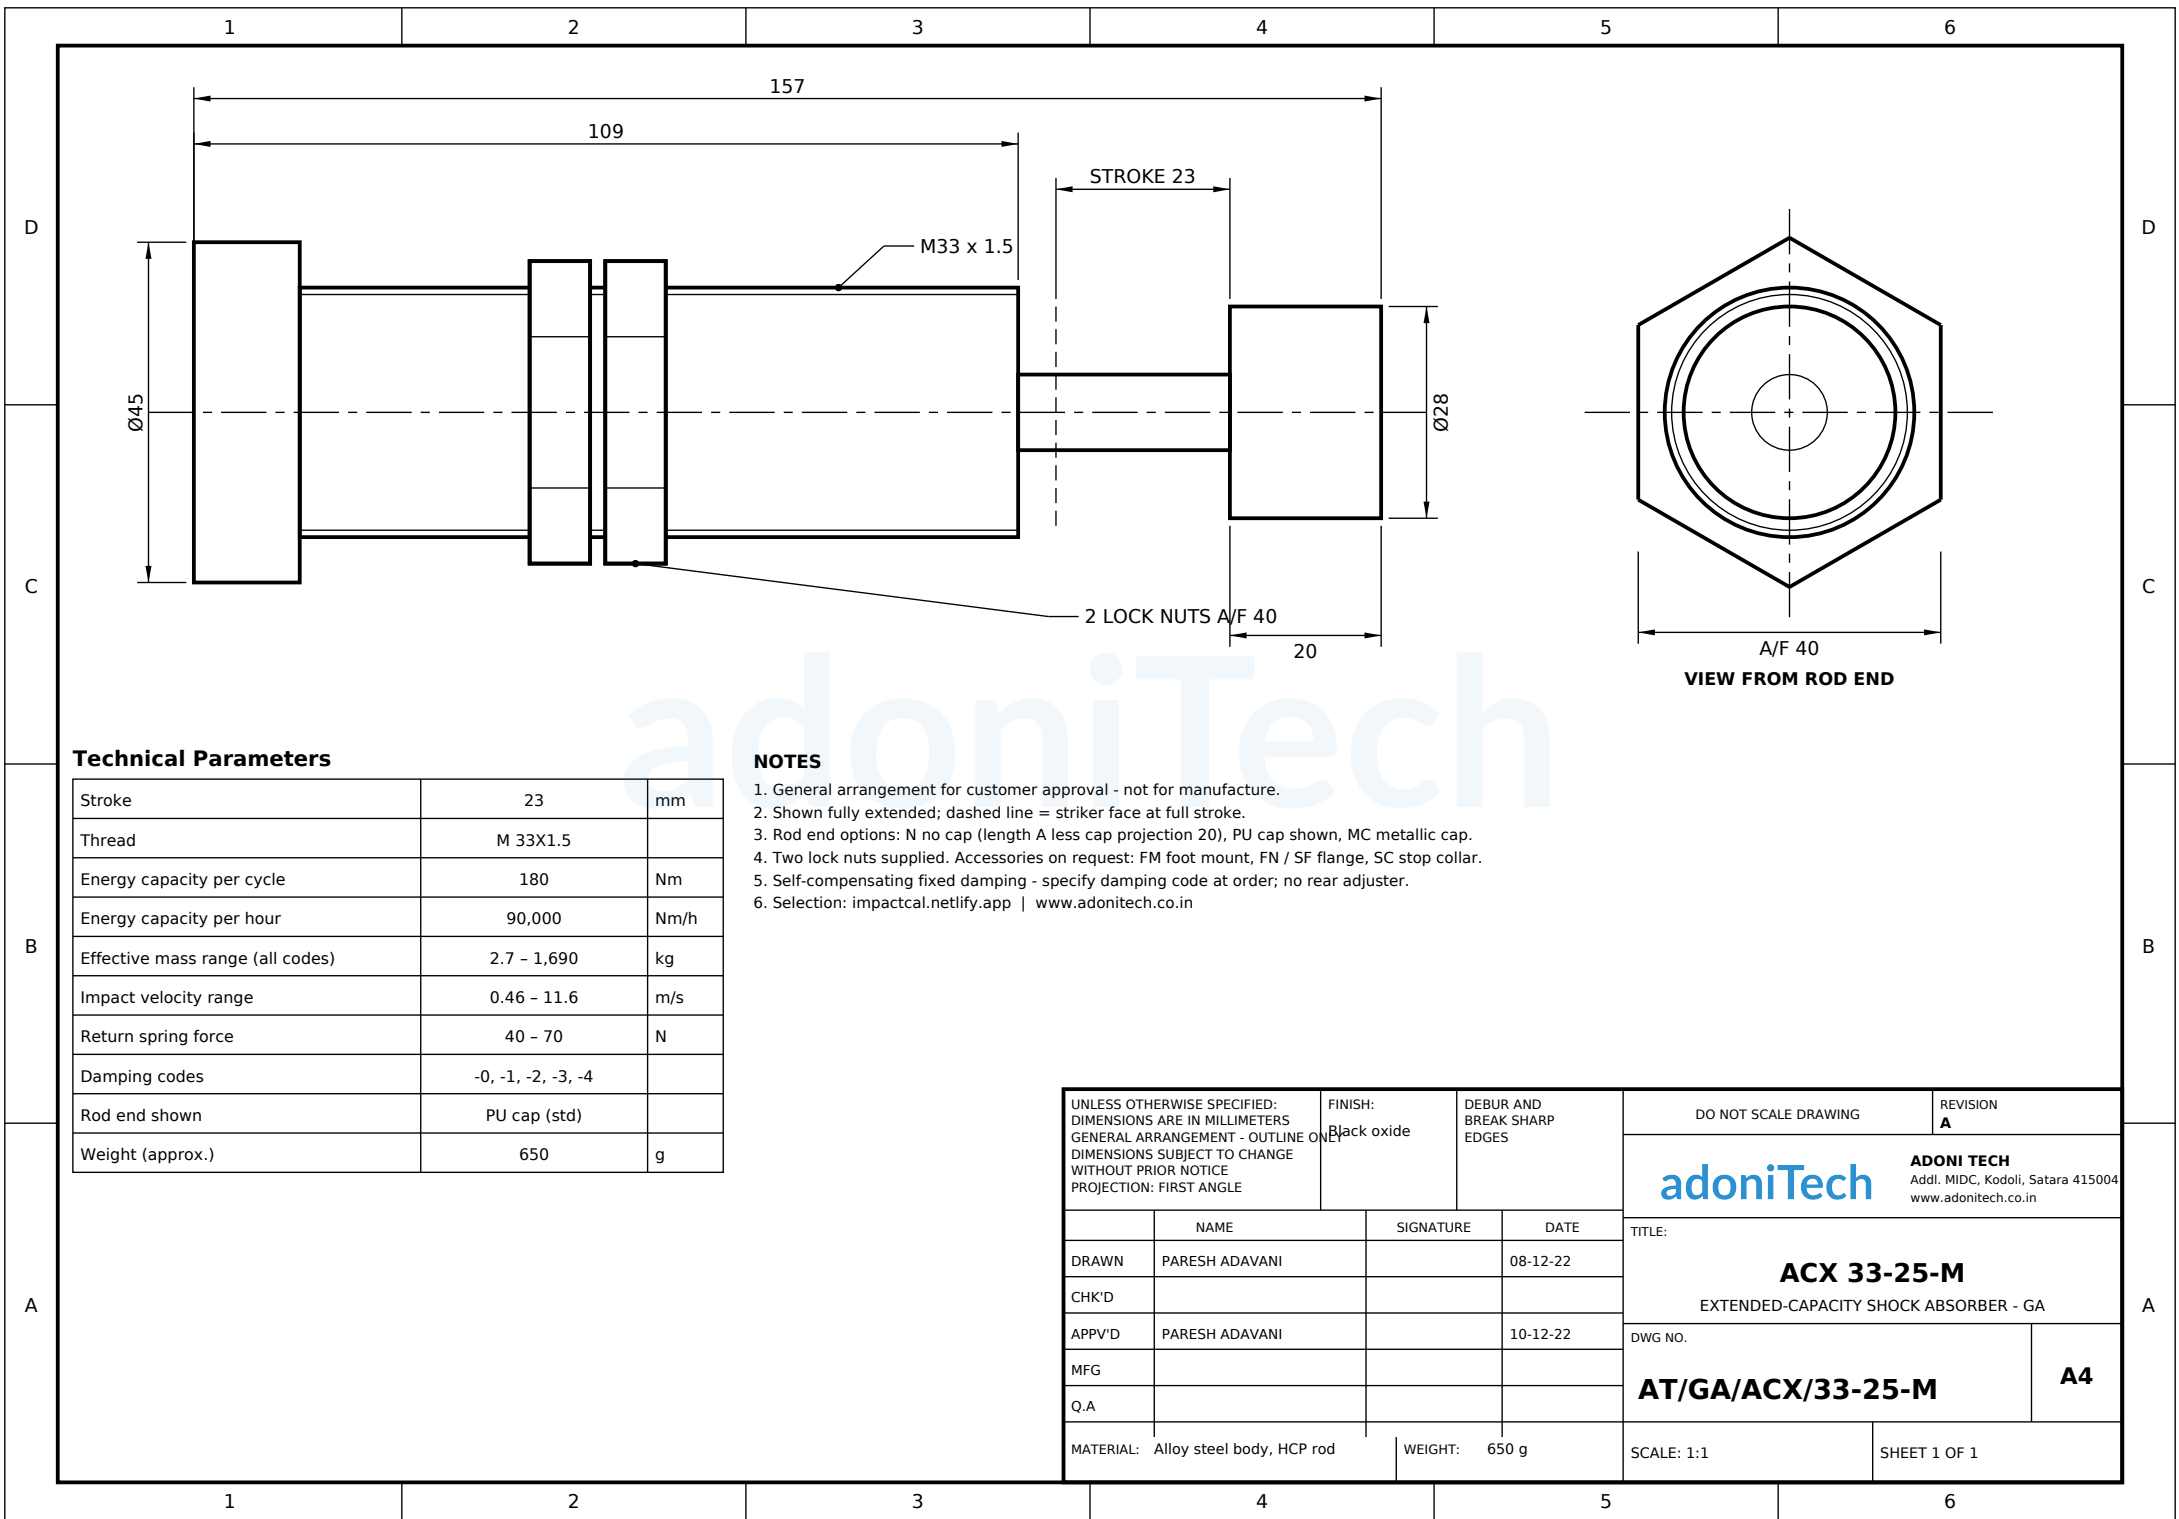

Technical Parameters

Stroke	23	mm
Thread	M 33X1.5	
Energy capacity per cycle	180	Nm
Energy capacity per hour	90,000	Nm/h
Effective mass range (all codes)	2.7 - 1,690	kg
Impact velocity range	0.46 - 11.6	m/s
Return spring force	40 - 70	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	650	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		NAME		SIGNATURE		DATE		TITLE:	
DRAWN		PARESH ADAVANI				08-12-22		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in ACX 33-25-M EXTENDED-CAPACITY SHOCK ABSORBER - GA AT/GA/ACX/33-25-M A4	
CHK'D									
APPV'D		PARESH ADAVANI				10-12-22			
MFG									
Q.A									
MATERIAL: Alloy steel body, HCP rod				WEIGHT: 650 g		SCALE: 1:1		SHEET 1 OF 1	