
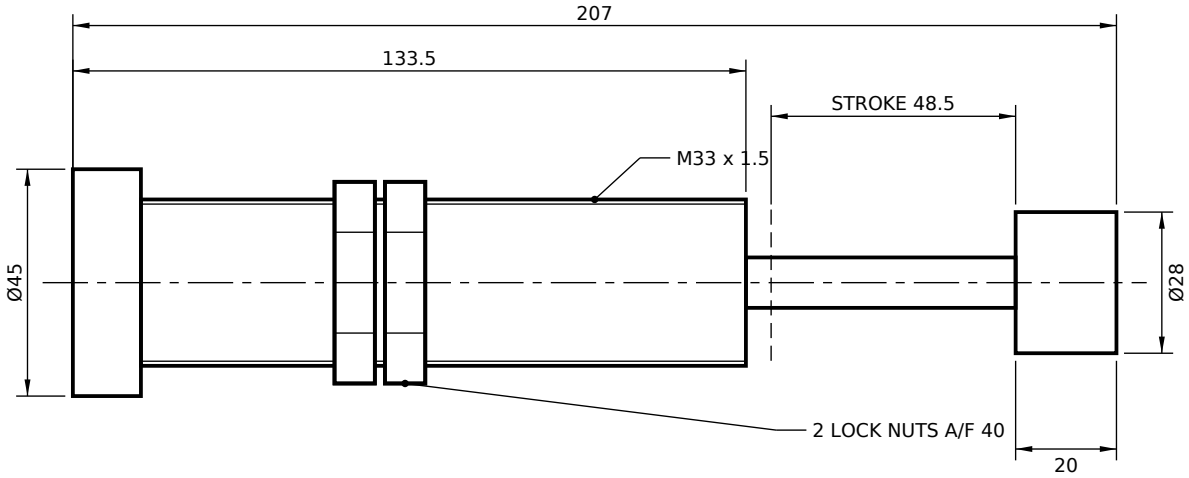


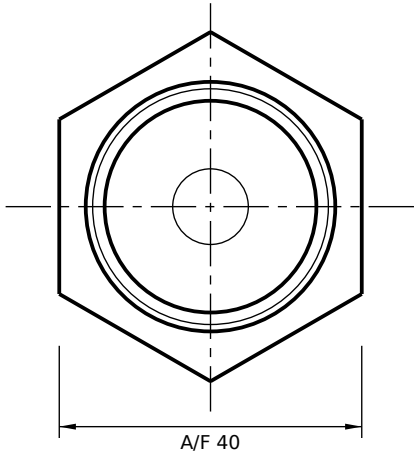

VIEW FROM ROD END (SCALE 1:1)

Technical Parameters

Stroke	48.5	mm
Thread	M 33X1.5	
Energy capacity per cycle	350	Nm
Energy capacity per hour	105,000	Nm/h
Effective mass range (all codes)	5.2 – 3,280	kg
Impact velocity range	0.46 – 11.6	m/s
Return spring force	45 – 80	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	700	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

adoniTech

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE	FINISH: Black oxide	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING / REVISION A

	NAME	SIGNATURE	DATE
DRAWN	PARESH ADAVANI		10-12-22
CHK'D			
APPV'D	PARESH ADAVANI		12-12-22
MFG			
Q.A			

MATERIAL: Alloy steel body, HCP rod | WEIGHT: 700 g

adoniTech — **ADONI TECH**, Addl. MIDC, Kodoli, Satara 415004, www.adonitech.co.in

TITLE:

ACX 33-50-M

EXTENDED-CAPACITY SHOCK ABSORBER - GA

DWG NO. **AT/GA/ACX/33-50-M** | **A4**

SCALE: 1:1.5 | SHEET 1 OF 1