
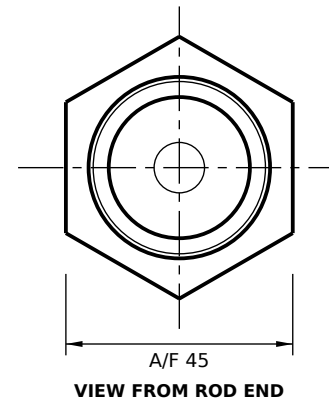


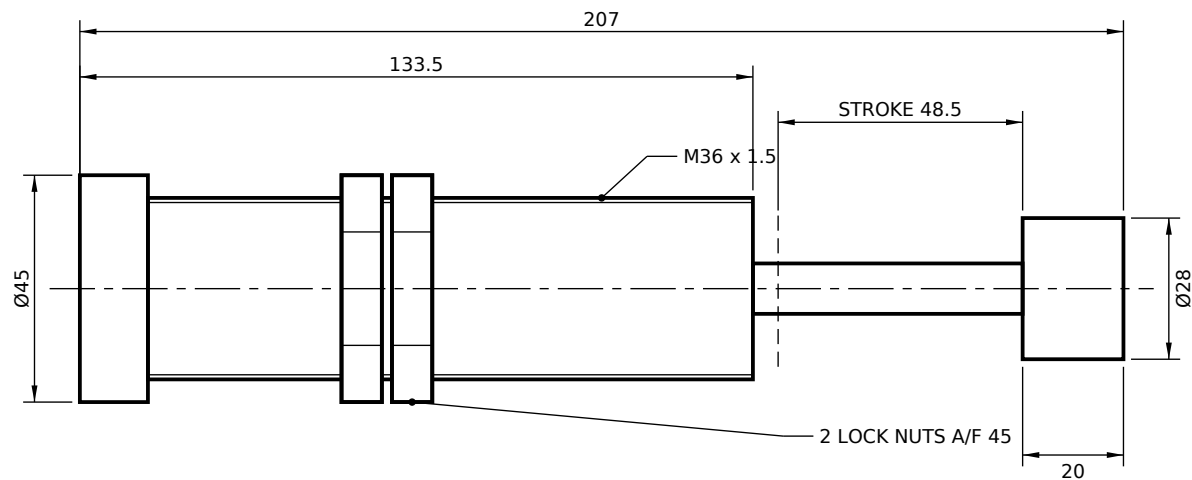

Technical Parameters

Stroke	48.5	mm
Thread	M 36X1.5	
Energy capacity per cycle	350	Nm
Energy capacity per hour	105,000	Nm/h
Effective mass range (all codes)	5.2 - 3,280	kg
Impact velocity range	0.46 - 11.6	m/s
Return spring force	45 - 80	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	705	g

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker face at full stroke.
- Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
- Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
- Self-compensating fixed damping - specify damping code at order; no rear adjuster.
- Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING		REVISION A
						ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in
	NAME	SIGNATURE	DATE	TITLE: ACX 36-50-M EXTENDED-CAPACITY SHOCK ABSORBER - GA		
DRAWN	PARESH ADAVANI		14-12-22			
CHK'D				DWG NO. AT/GA/ACX/36-50-M		
APPV'D	PARESH ADAVANI		16-12-22			
MFG				A4		
Q.A						
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 705 g		SCALE: 1:1.5		SHEET 1 OF 1