


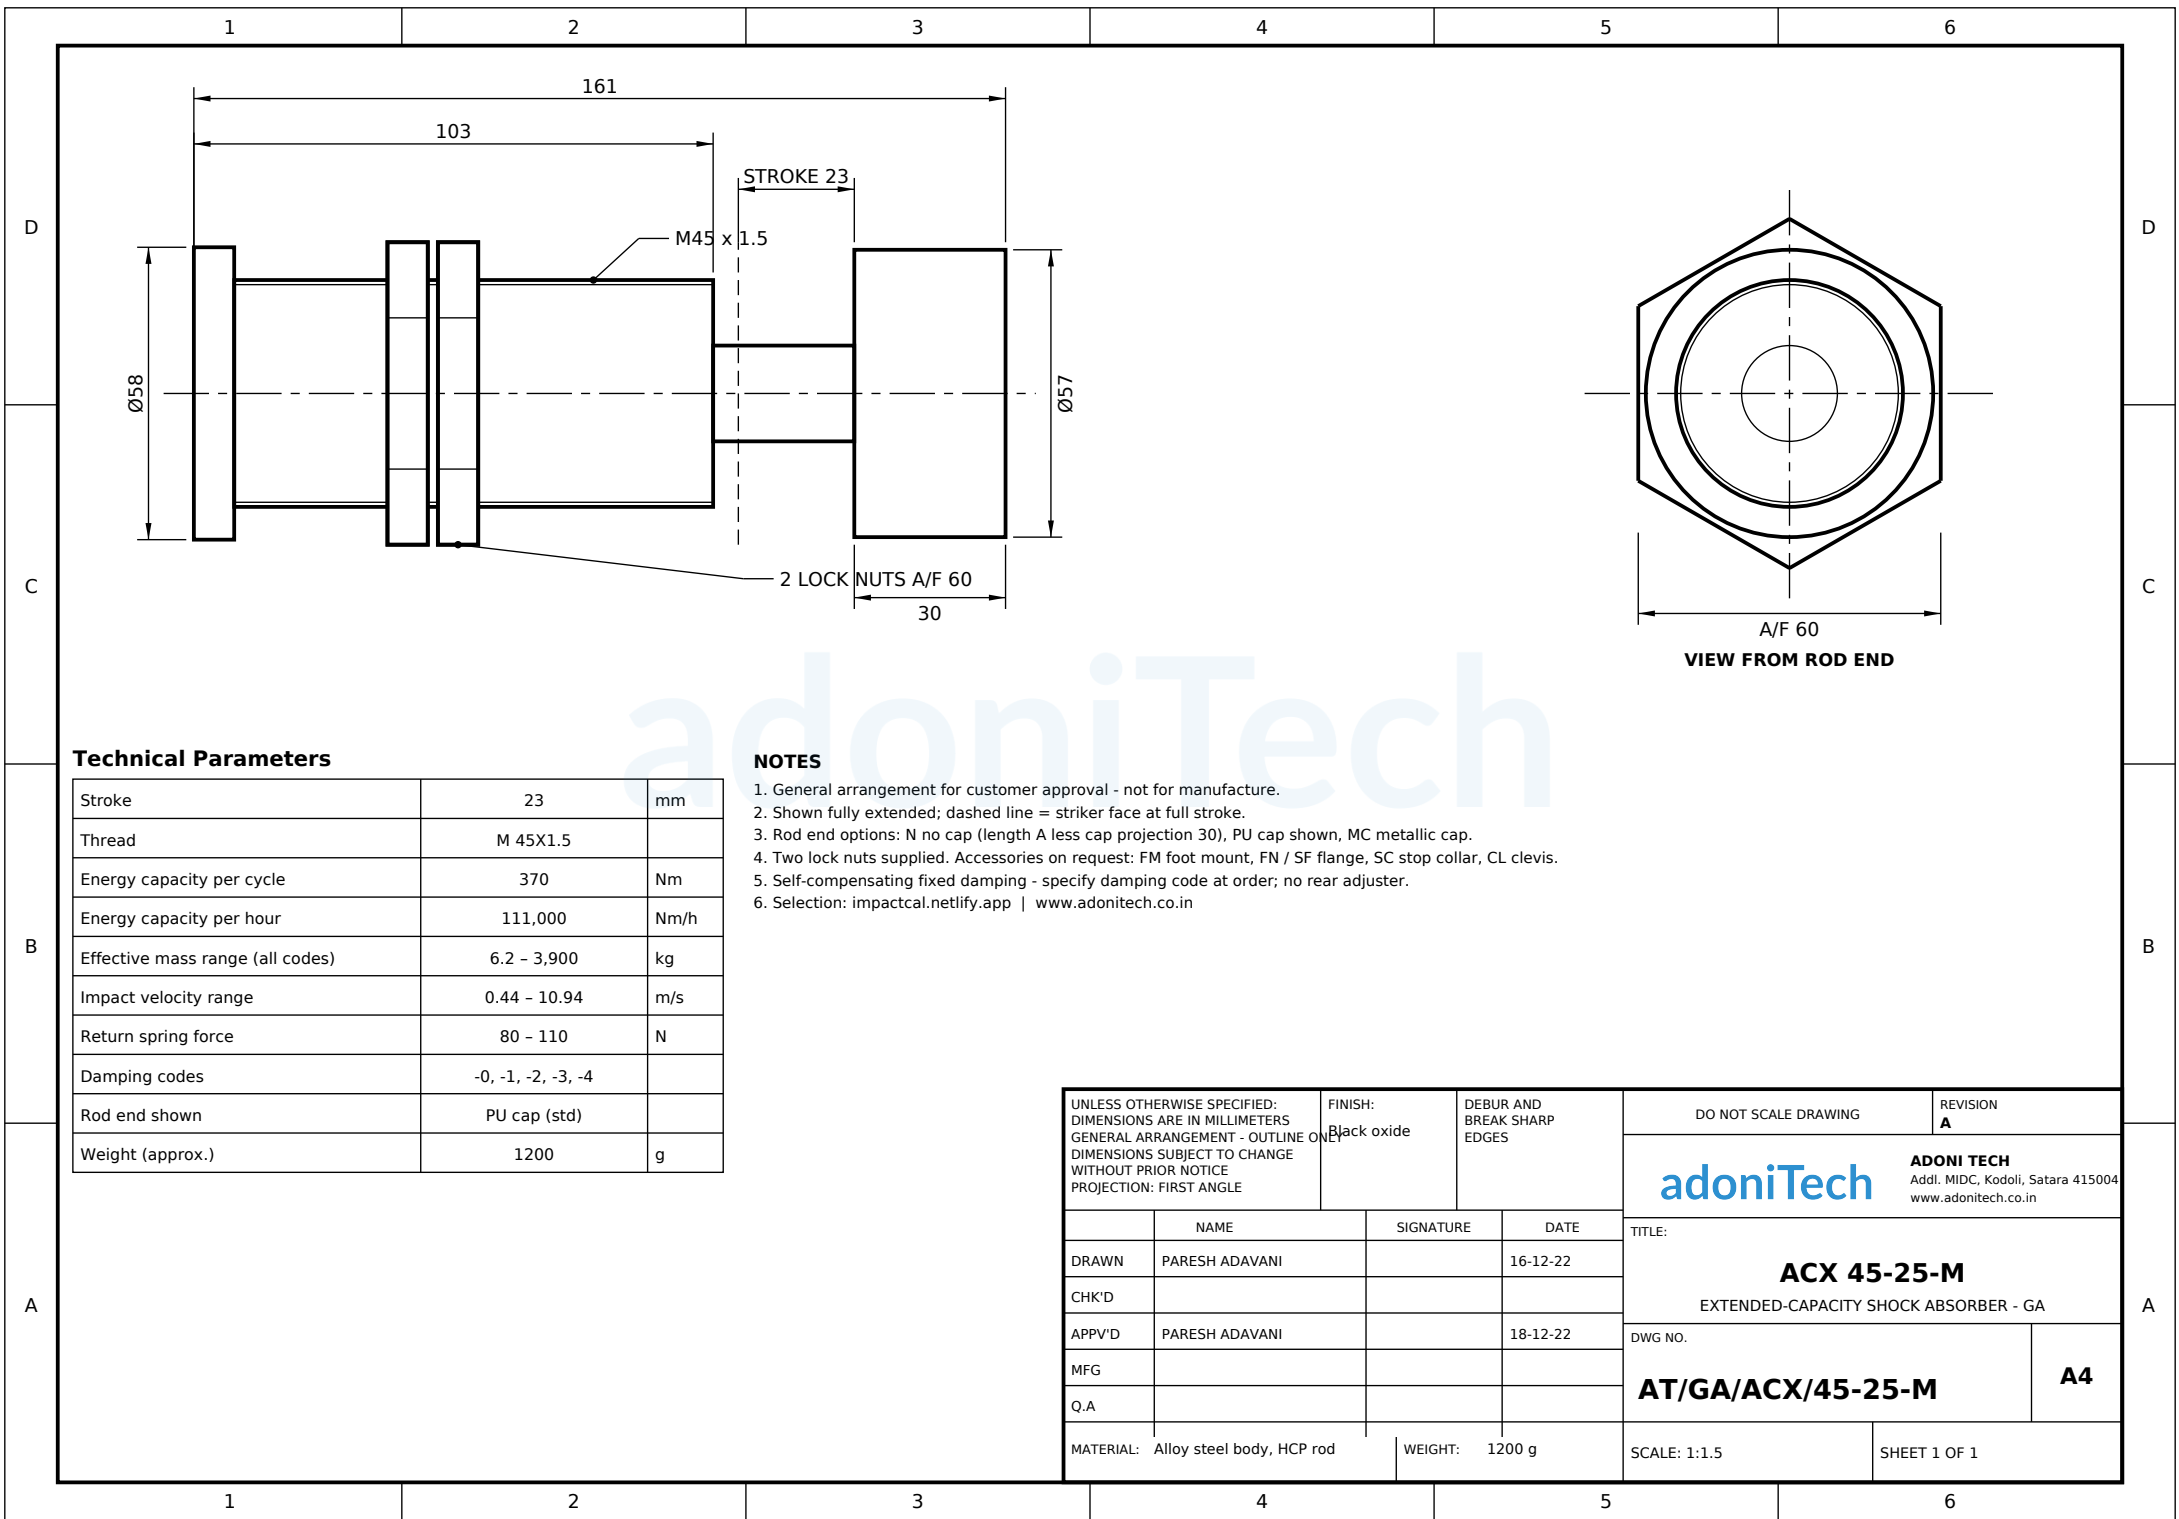

Technical Parameters

Stroke	23	mm
Thread	M 45X1.5	
Energy capacity per cycle	370	Nm
Energy capacity per hour	111,000	Nm/h
Effective mass range (all codes)	6.2 - 3,900	kg
Impact velocity range	0.44 - 10.94	m/s
Return spring force	80 - 110	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	1200	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 30), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A						
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in						TITLE: ACX 45-25-M EXTENDED-CAPACITY SHOCK ABSORBER - GA						
DWG NO. AT/GA/ACX/45-25-M A4														
	NAME							SIGNATURE		DATE				
DRAWN	PARESH ADAVANI									16-12-22				
CHK'D														
APPV'D	PARESH ADAVANI									18-12-22				
MFG														
Q.A														
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 1200 g			SCALE: 1:1.5		SHEET 1 OF 1						