


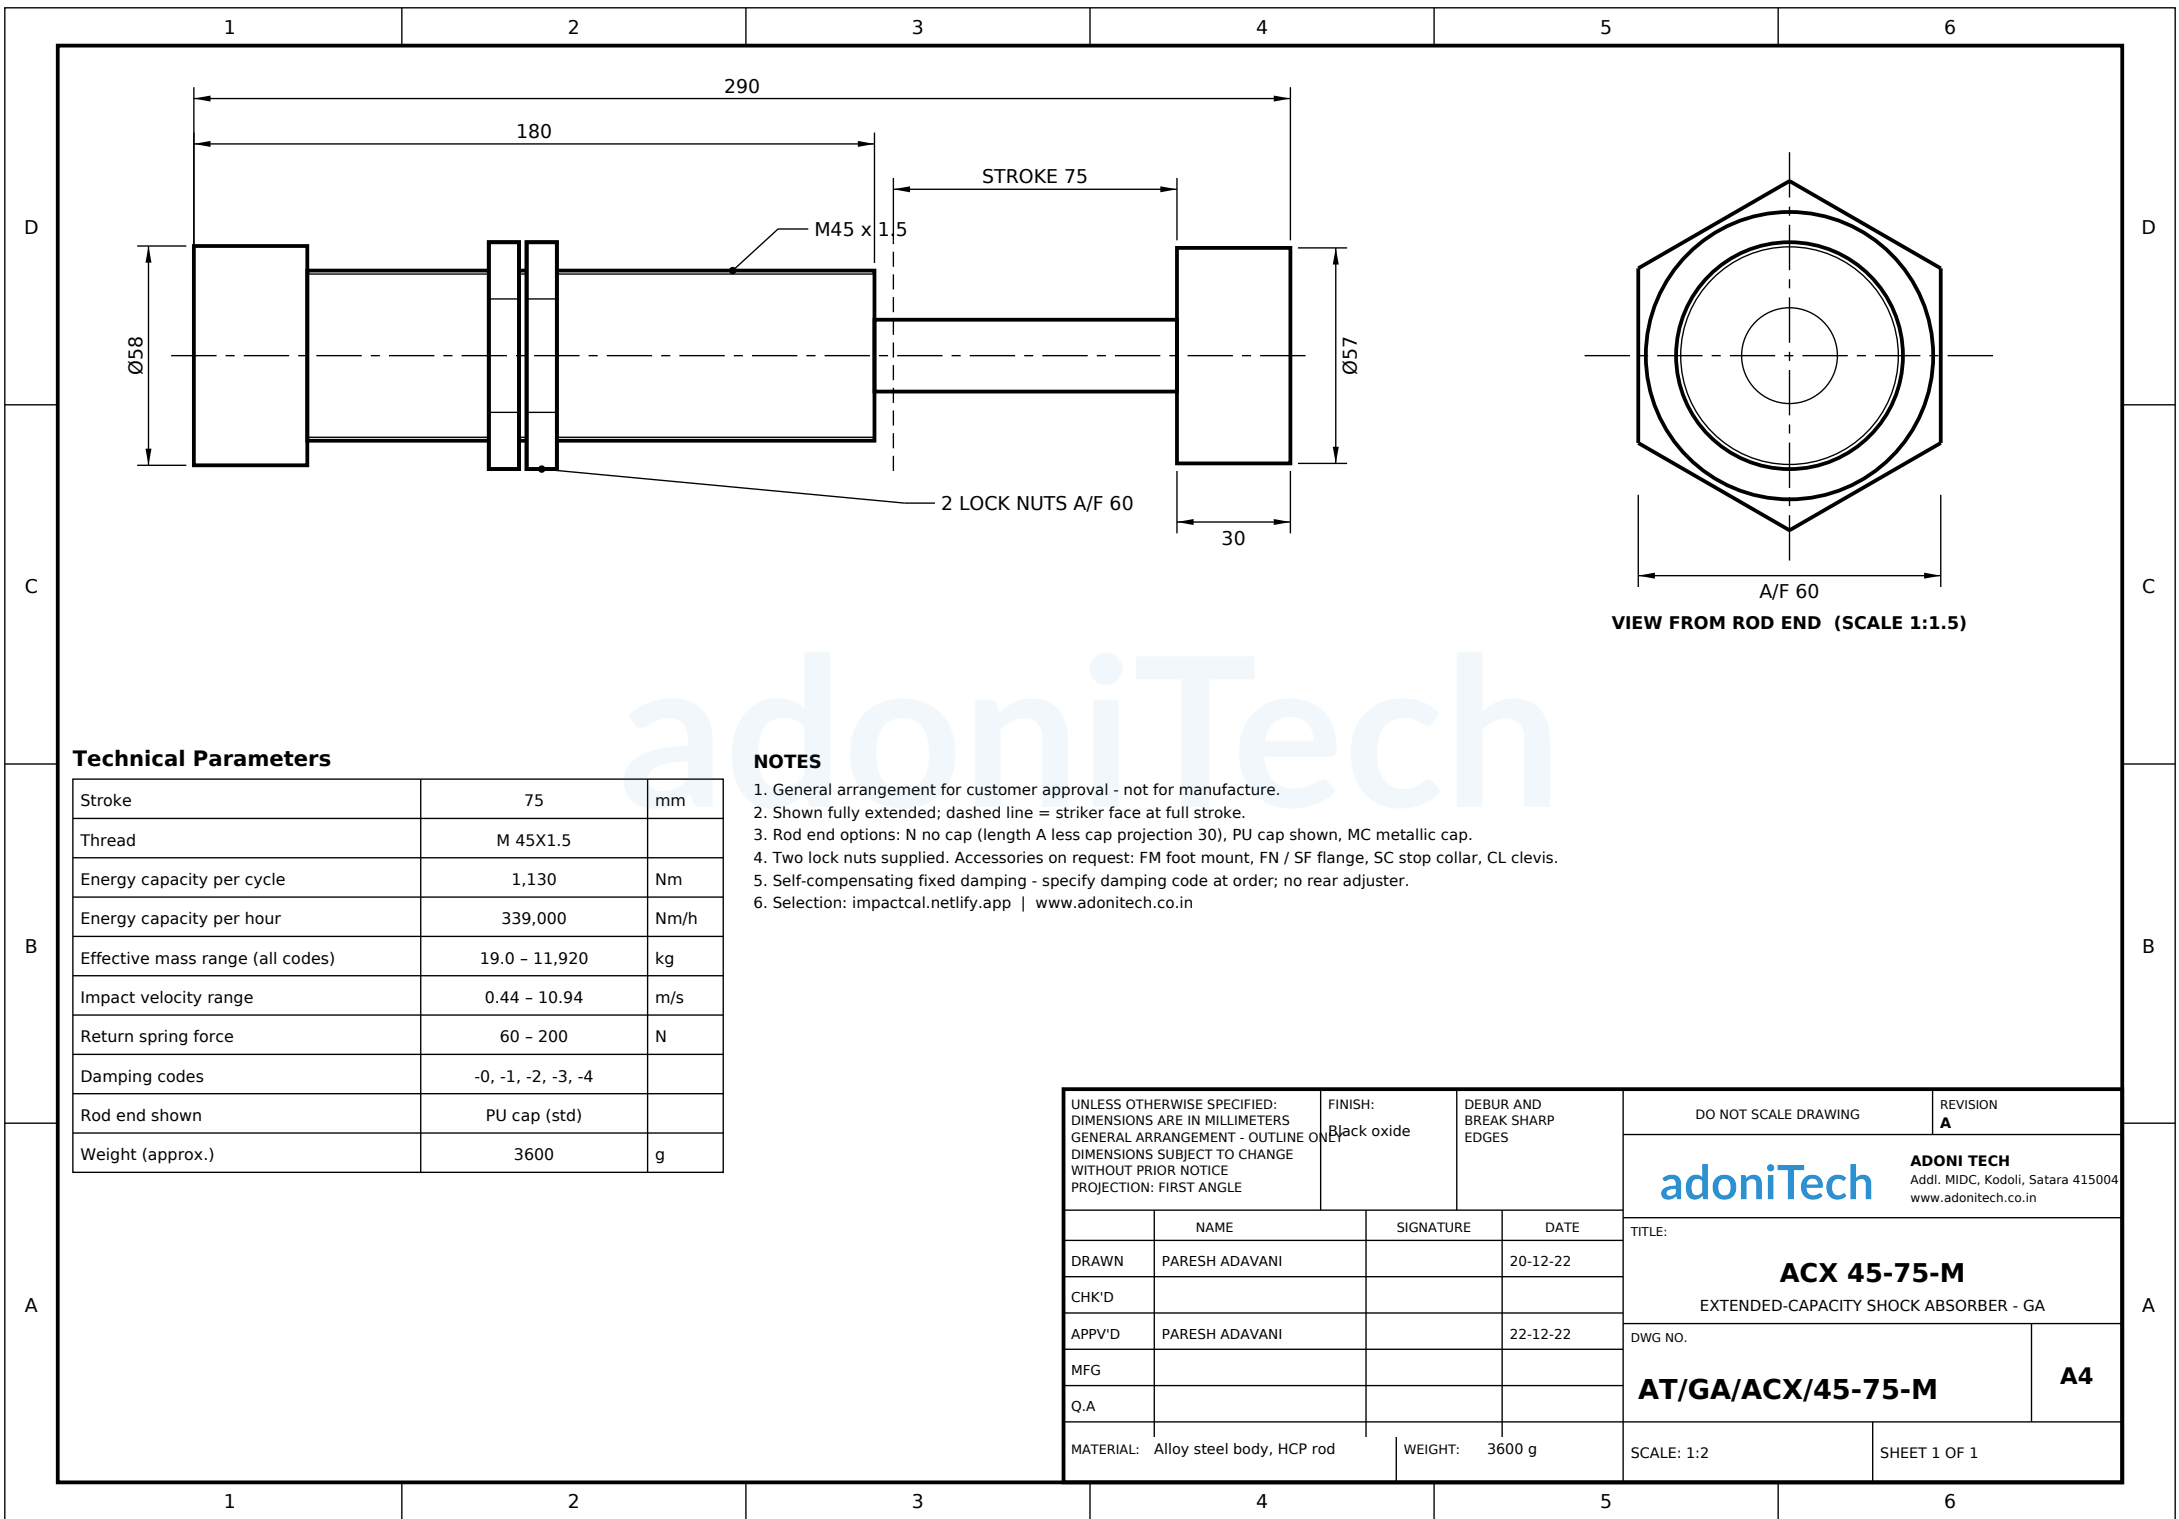

Technical Parameters

Stroke	75	mm
Thread	M 45X1.5	
Energy capacity per cycle	1,130	Nm
Energy capacity per hour	339,000	Nm/h
Effective mass range (all codes)	19.0 - 11,920	kg
Impact velocity range	0.44 - 10.94	m/s
Return spring force	60 - 200	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	3600	g

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker face at full stroke.
- Rod end options: N no cap (length A less cap projection 30), PU cap shown, MC metallic cap.
- Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
- Self-compensating fixed damping - specify damping code at order; no rear adjuster.
- Selection: [impactcal.netlify.app](#) | [www.adonitech.co.in](#)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING	REVISION A
						adoniTech	
		NAME		SIGNATURE		DATE	
DRAWN		PARESH ADAVANI				20-12-22	
CHK'D							
APPV'D		PARESH ADAVANI				22-12-22	
MFG							
Q.A							
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 3600 g		SCALE: 1:2		SHEET 1 OF 1	
						TITLE:	
						ACX 45-75-M	
						EXTENDED-CAPACITY SHOCK ABSORBER - GA	
						DWG NO.	
						AT/GA/ACX/45-75-M	
						A4	