
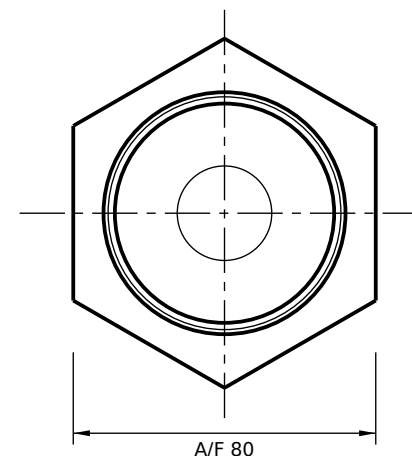


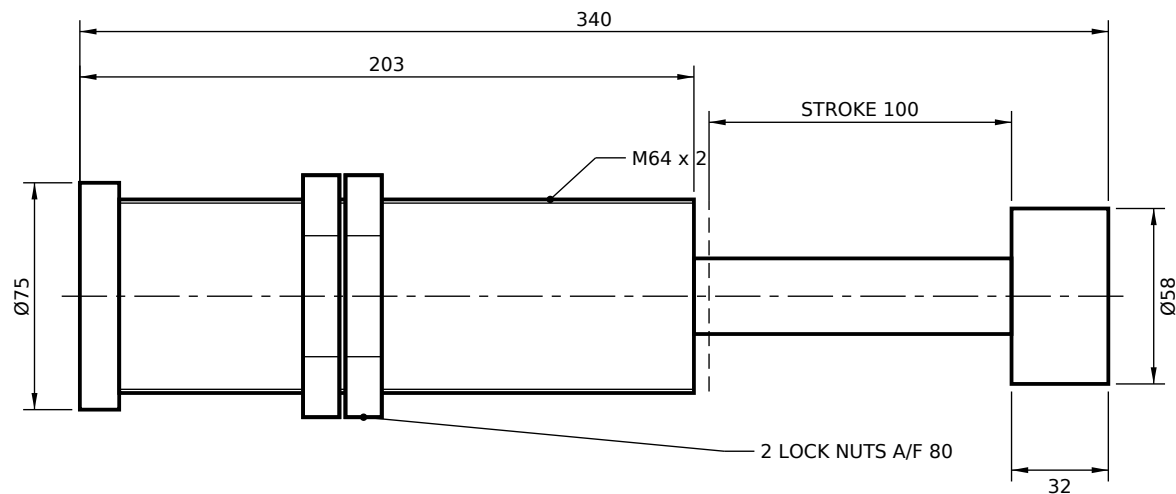

VIEW FROM ROD END (SCALE 1:2)

Technical Parameters

Stroke	100	mm
Thread	M 64X2	
Energy capacity per cycle	3,730	Nm
Energy capacity per hour	746,000	Nm/h
Effective mass range (all codes)	69.0 - 43,530	kg
Impact velocity range	0.41 - 10.4	m/s
Return spring force	110 - 260	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	4500	g

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker face at full stroke.
- Rod end options: N no cap (length A less cap projection 32), PU cap shown, MC metallic cap.
- Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
- Self-compensating fixed damping - specify damping code at order; no rear adjuster.
- Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING	REVISION A
				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
	NAME	SIGNATURE	DATE	TITLE:	
DRAWN	PARESH ADAVANI		24-12-22	ACX 64-100-M EXTENDED-CAPACITY SHOCK ABSORBER - GA	
CHK'D					
APPV'D	PARESH ADAVANI		26-12-22	DWG NO.	
MFG				AT/GA/ACX/64-100-M	
Q.A					
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 4500 g		SCALE: 1:2.5	SHEET 1 OF 1