


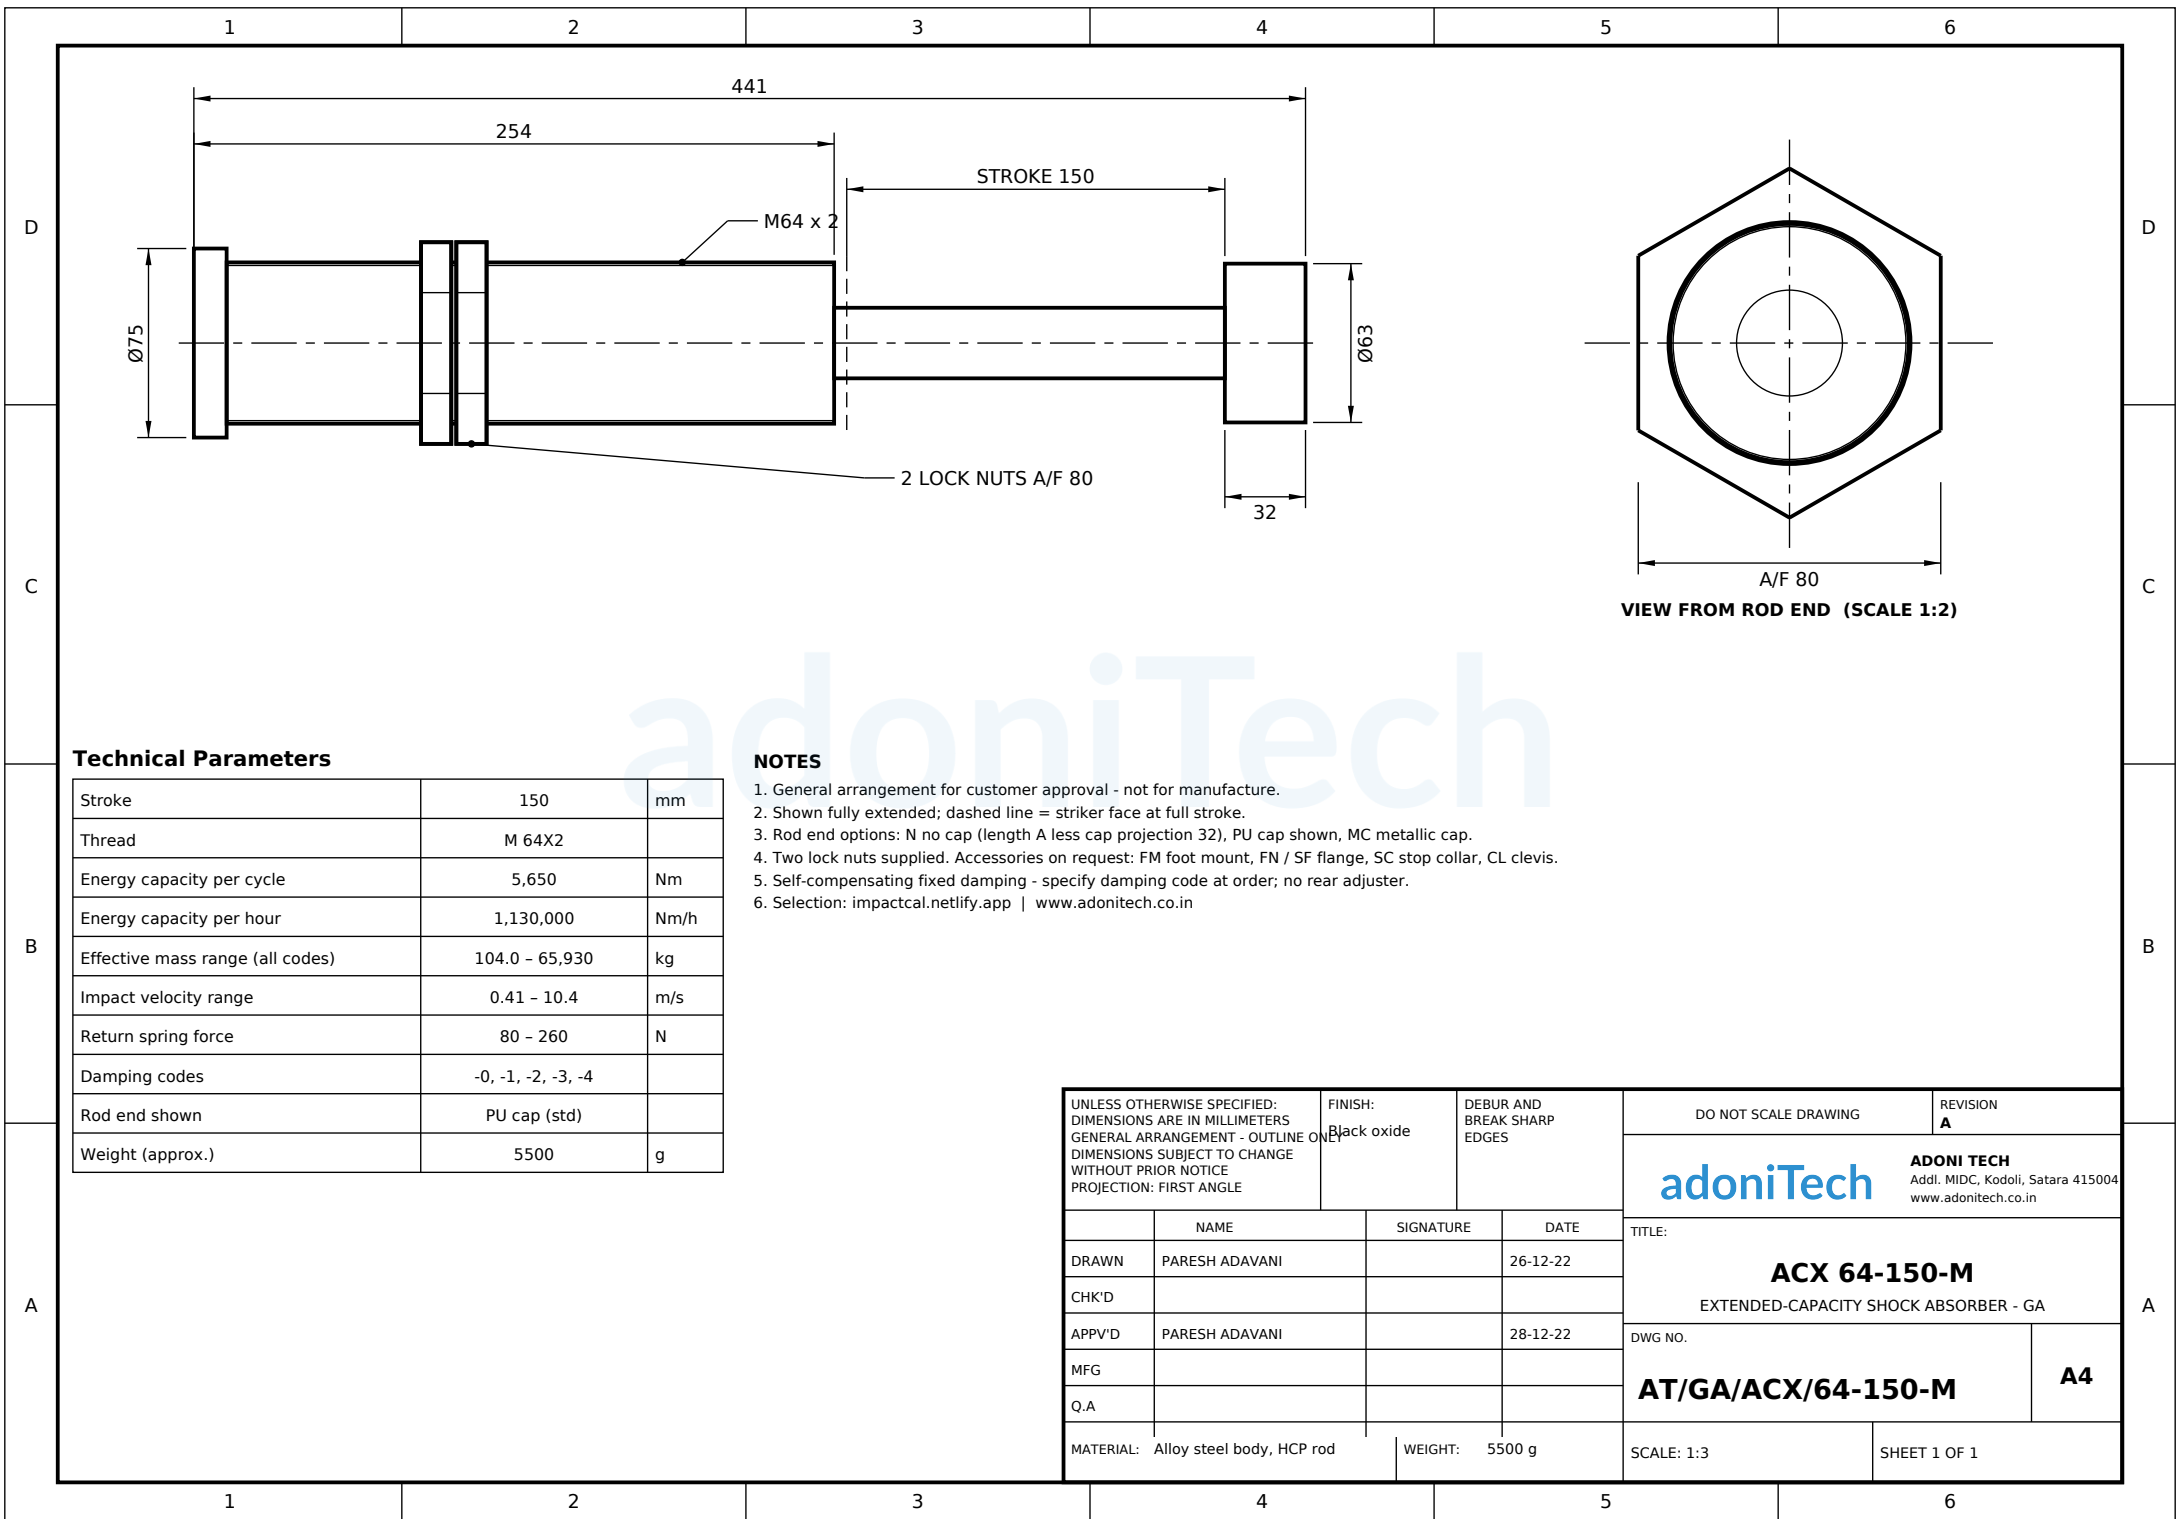

Technical Parameters

Stroke	150	mm
Thread	M 64X2	
Energy capacity per cycle	5,650	Nm
Energy capacity per hour	1,130,000	Nm/h
Effective mass range (all codes)	104.0 - 65,930	kg
Impact velocity range	0.41 - 10.4	m/s
Return spring force	80 - 260	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	5500	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 32), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A			
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in									
	NAME		SIGNATURE		DATE		TITLE: ACX 64-150-M EXTENDED-CAPACITY SHOCK ABSORBER - GA DWG NO. AT/GA/ACX/64-150-M A4				
DRAWN	PARESH ADAVANI				26-12-22						
CHK'D											
APPV'D	PARESH ADAVANI				28-12-22						
MFG											
Q.A											
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 5500 g			SCALE: 1:3			SHEET 1 OF 1		