


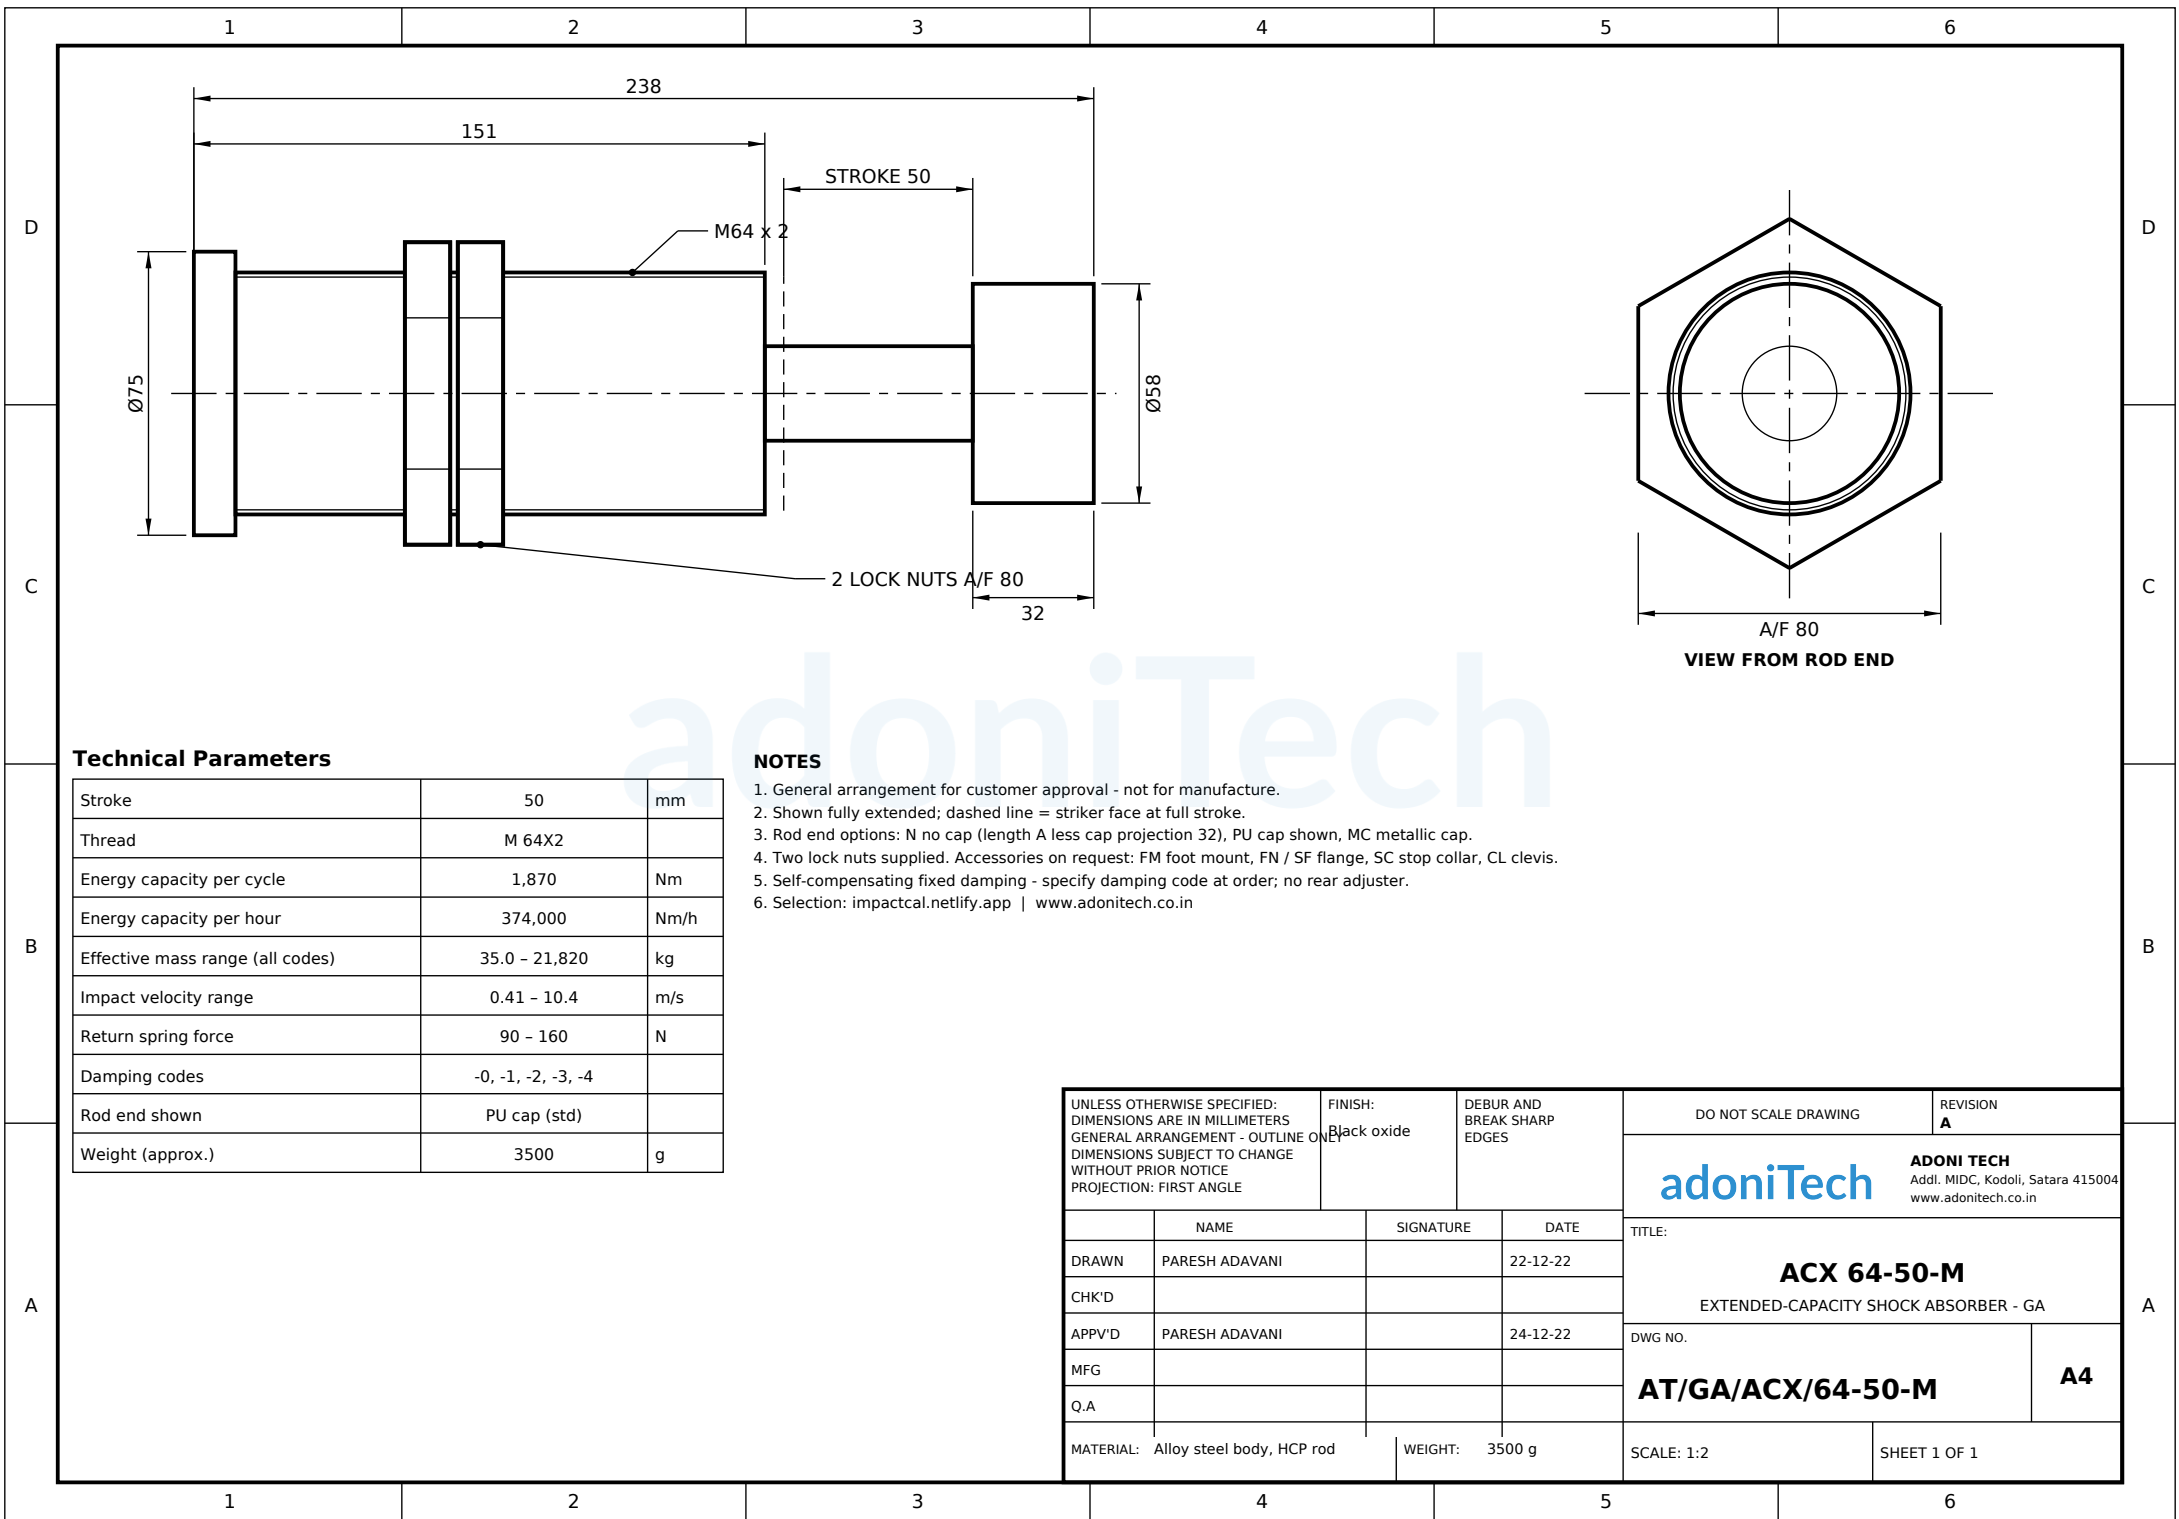

Technical Parameters

Stroke	50	mm
Thread	M 64X2	
Energy capacity per cycle	1,870	Nm
Energy capacity per hour	374,000	Nm/h
Effective mass range (all codes)	35.0 - 21,820	kg
Impact velocity range	0.41 - 10.4	m/s
Return spring force	90 - 160	N
Damping codes	-0, -1, -2, -3, -4	
Rod end shown	PU cap (std)	
Weight (approx.)	3500	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 32), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
5. Self-compensating fixed damping - specify damping code at order; no rear adjuster.
6. Selection: [impactcal.netlify.app](#) | [www.adonitech.co.in](#)

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in								
	NAME		SIGNATURE		DATE		TITLE: ACX 64-50-M EXTENDED-CAPACITY SHOCK ABSORBER - GA			
DRAWN	PARESH ADAVANI				22-12-22					
CHK'D							DWG NO. AT/GA/ACX/64-50-M			
APPV'D	PARESH ADAVANI				24-12-22					
MFG							A4			
Q.A										
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 3500 g			SCALE: 1:2		SHEET 1 OF 1		