
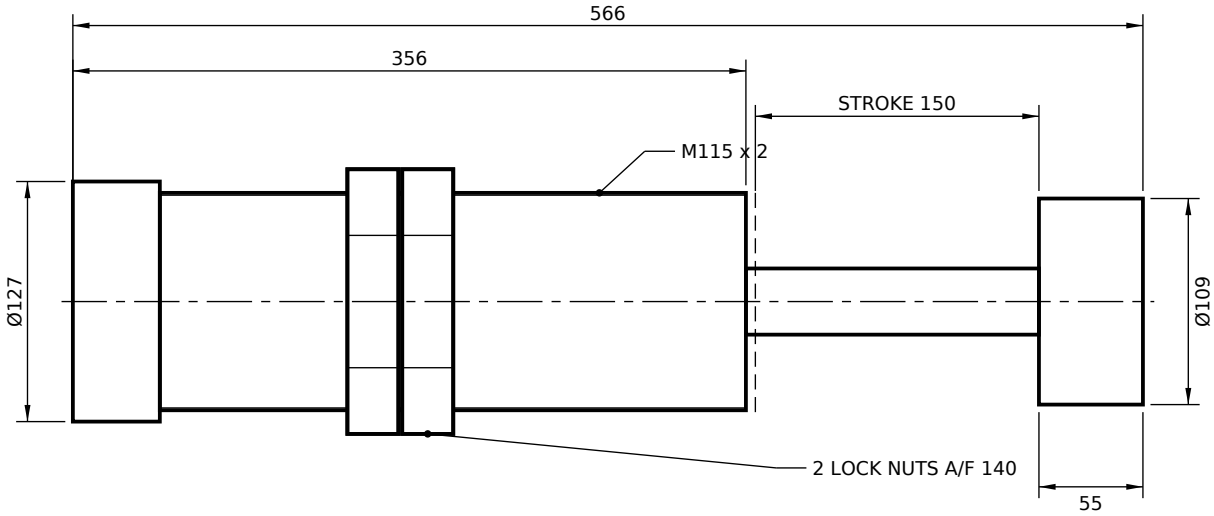


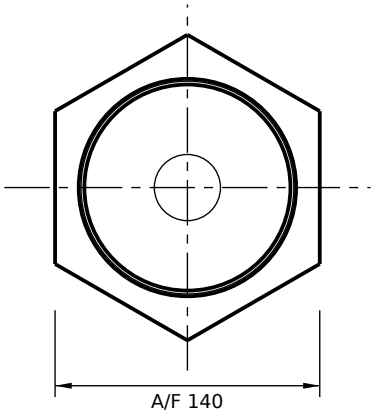

VIEW FROM ROD END

Technical Parameters

Stroke	150	mm
Thread	M 115X2	
Energy capacity per cycle	11,000	Nm
Energy capacity per hour	2,090,000	Nm/h
Effective mass range	355 – 88,000	kg
Return spring force	150 – 320	N
Damping	Adjustable	
Rod end shown	PU cap (std)	
Weight (approx.)	20000	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 55), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
5. Damping adjustable at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

adoniTech

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE	FINISH: Black oxide	DEBUR AND BREAK SHARP EDGES	DO NOT SCALE DRAWING / REVISION **A**

	NAME	SIGNATURE	DATE
DRAWN	PARESH ADAVANI		14-02-23
CHK'D			
APPV'D	PARESH ADAVANI		16-02-23
MFG			
Q.A			

MATERIAL: Alloy steel body, HCP rod | WEIGHT: 20000 g

ADONI TECH
Addl. MIDC, Kodoli, Satara 415004
www.adonitech.co.in

TITLE:

AD 115-150-M

ADJUSTABLE SHOCK ABSORBER - GA

DWG NO. **AT/GA/AD/115-150-M** | **A4**

SCALE: 1:4 | SHEET 1 OF 1