
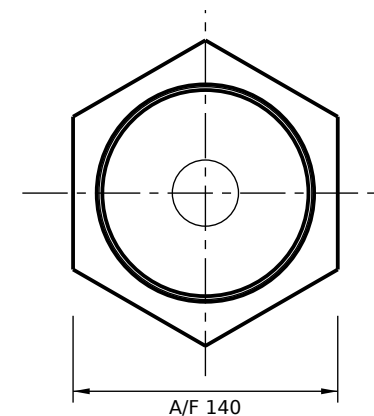


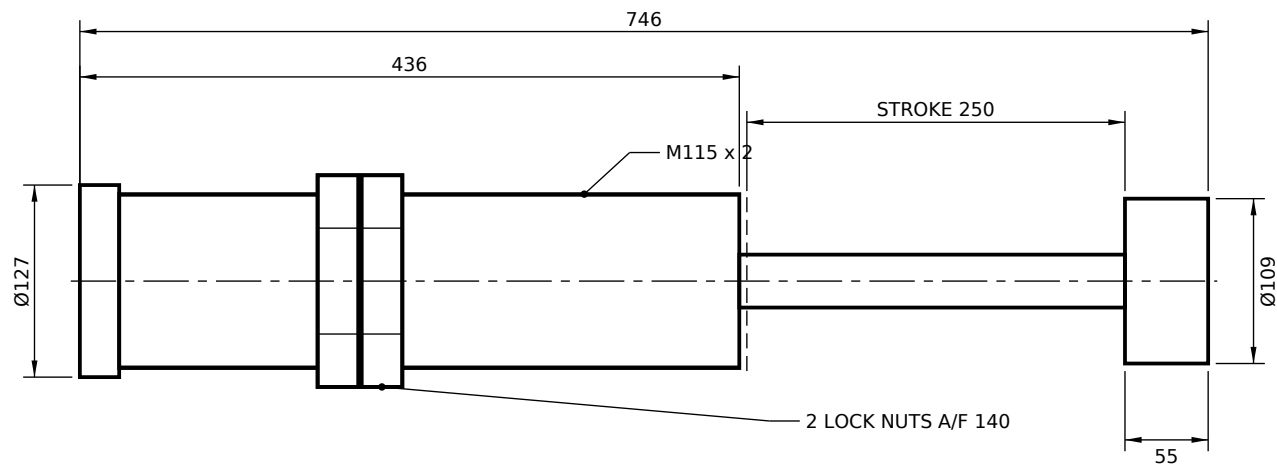

VIEW FROM ROD END (SCALE 1:4)

Technical Parameters

Stroke	250	mm
Thread	M 115X2	
Energy capacity per cycle	18,500	Nm
Energy capacity per hour	2,683,000	Nm/h
Effective mass range	450 - 148,000	kg
Return spring force	120 - 380	N
Damping	Adjustable	
Rod end shown	PU cap (std)	
Weight (approx.)	28000	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 55), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar, CL clevis.
5. Damping adjustable at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE				FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in										AD 115-250-M ADJUSTABLE SHOCK ABSORBER - GA	
TITLE:											
		DWG NO.		AT/GA/AD/115-250-M A4							
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 28000 g		SCALE: 1:5				SHEET 1 OF 1			