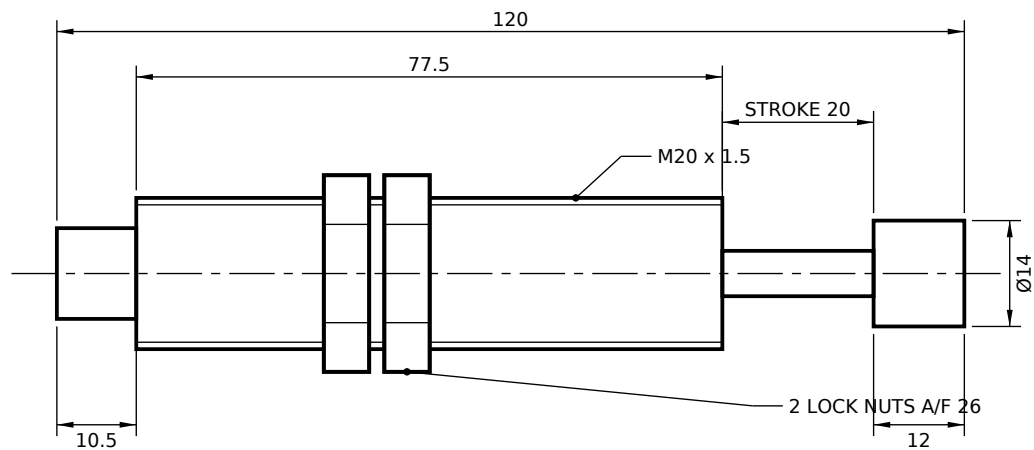


Technical Parameters

Stroke	20	mm
Thread	M 20X1.5	
Energy capacity per cycle	25	Nm
Energy capacity per hour	35,000	Nm/h
Effective mass range	2 - 220	kg
Return spring force	12 - 19	N
Damping	Adjustable (rear adjuster)	
Rod end shown	PU cap (std)	
Weight (approx.)	190	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 12), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Damping set by rear adjuster at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
		adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in						TITLE: AD 20-20-M ADJUSTABLE SHOCK ABSORBER - GA DWG NO. AT/GA/AD/20-20-M A4	
	NAME		SIGNATURE		DATE				
DRAWN	PARESH ADAVANI				01-01-23				
CHK'D									
APPV'D	PARESH ADAVANI				03-01-23				
MFG									
Q.A									
MATERIAL: Alloy steel body, HCP rod				WEIGHT: 190 g		SCALE: 1:1			