
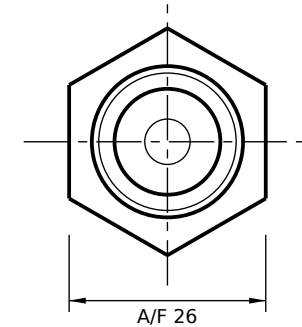


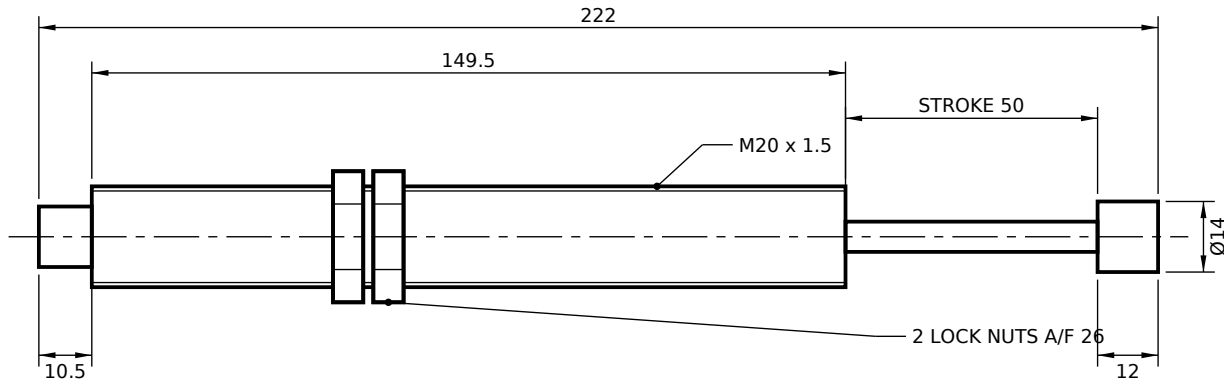

VIEW FROM ROD END (SCALE 1:1)

Technical Parameters

Stroke	50	mm
Thread	M 20X1.5	
Energy capacity per cycle	60	Nm
Energy capacity per hour	60,000	Nm/h
Effective mass range	10 - 400	kg
Return spring force	6 - 17	N
Damping	Adjustable (rear adjuster)	
Rod end shown	PU cap (std)	
Weight (approx.)	219	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 12), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Damping set by rear adjuster at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE				FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A			
								adoniTech				ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in	
	NAME			SIGNATURE			DATE		TITLE:				
DRAWN	PARESH ADAVANI						03-01-23		AD 20-50-M ADJUSTABLE SHOCK ABSORBER - GA				
CHK'D													
APPV'D	PARESH ADAVANI						05-01-23		DWG NO.		A4		
MFG									AT/GA/AD/20-50-M				
Q.A													
MATERIAL: Alloy steel body, HCP rod				WEIGHT: 219 g				SCALE: 1:1.5			SHEET 1 OF 1		

A4