
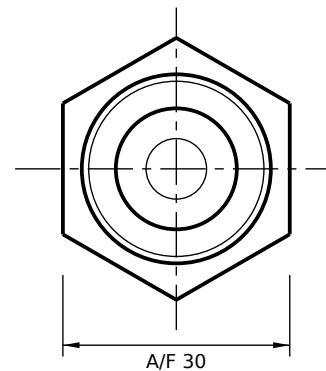


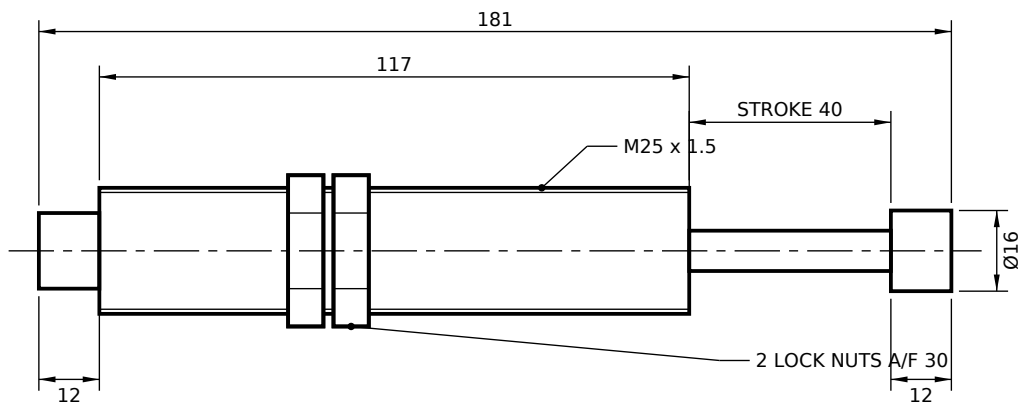

VIEW FROM ROD END (SCALE 1:1)

Technical Parameters

Stroke	40	mm
Thread	M 25X1.5	
Energy capacity per cycle	130	Nm
Energy capacity per hour	117,000	Nm/h
Effective mass range	10 - 2,100	kg
Return spring force	6 - 17	N
Damping	Adjustable (rear adjuster)	
Rod end shown	PU cap (std)	
Weight (approx.)	395	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 12), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Damping set by rear adjuster at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
						 ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
NAME		SIGNATURE		DATE		TITLE:			
DRAWN PARESH ADAVANI				09-01-23		AD 25-40-M ADJUSTABLE SHOCK ABSORBER - GA			
CHK'D									
APPV'D PARESH ADAVANI				11-01-23		DWG NO.			
MFG						AT/GA/AD/25-40-M			
Q.A									
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 395 g		SCALE: 1:1.5		SHEET 1 OF 1			