


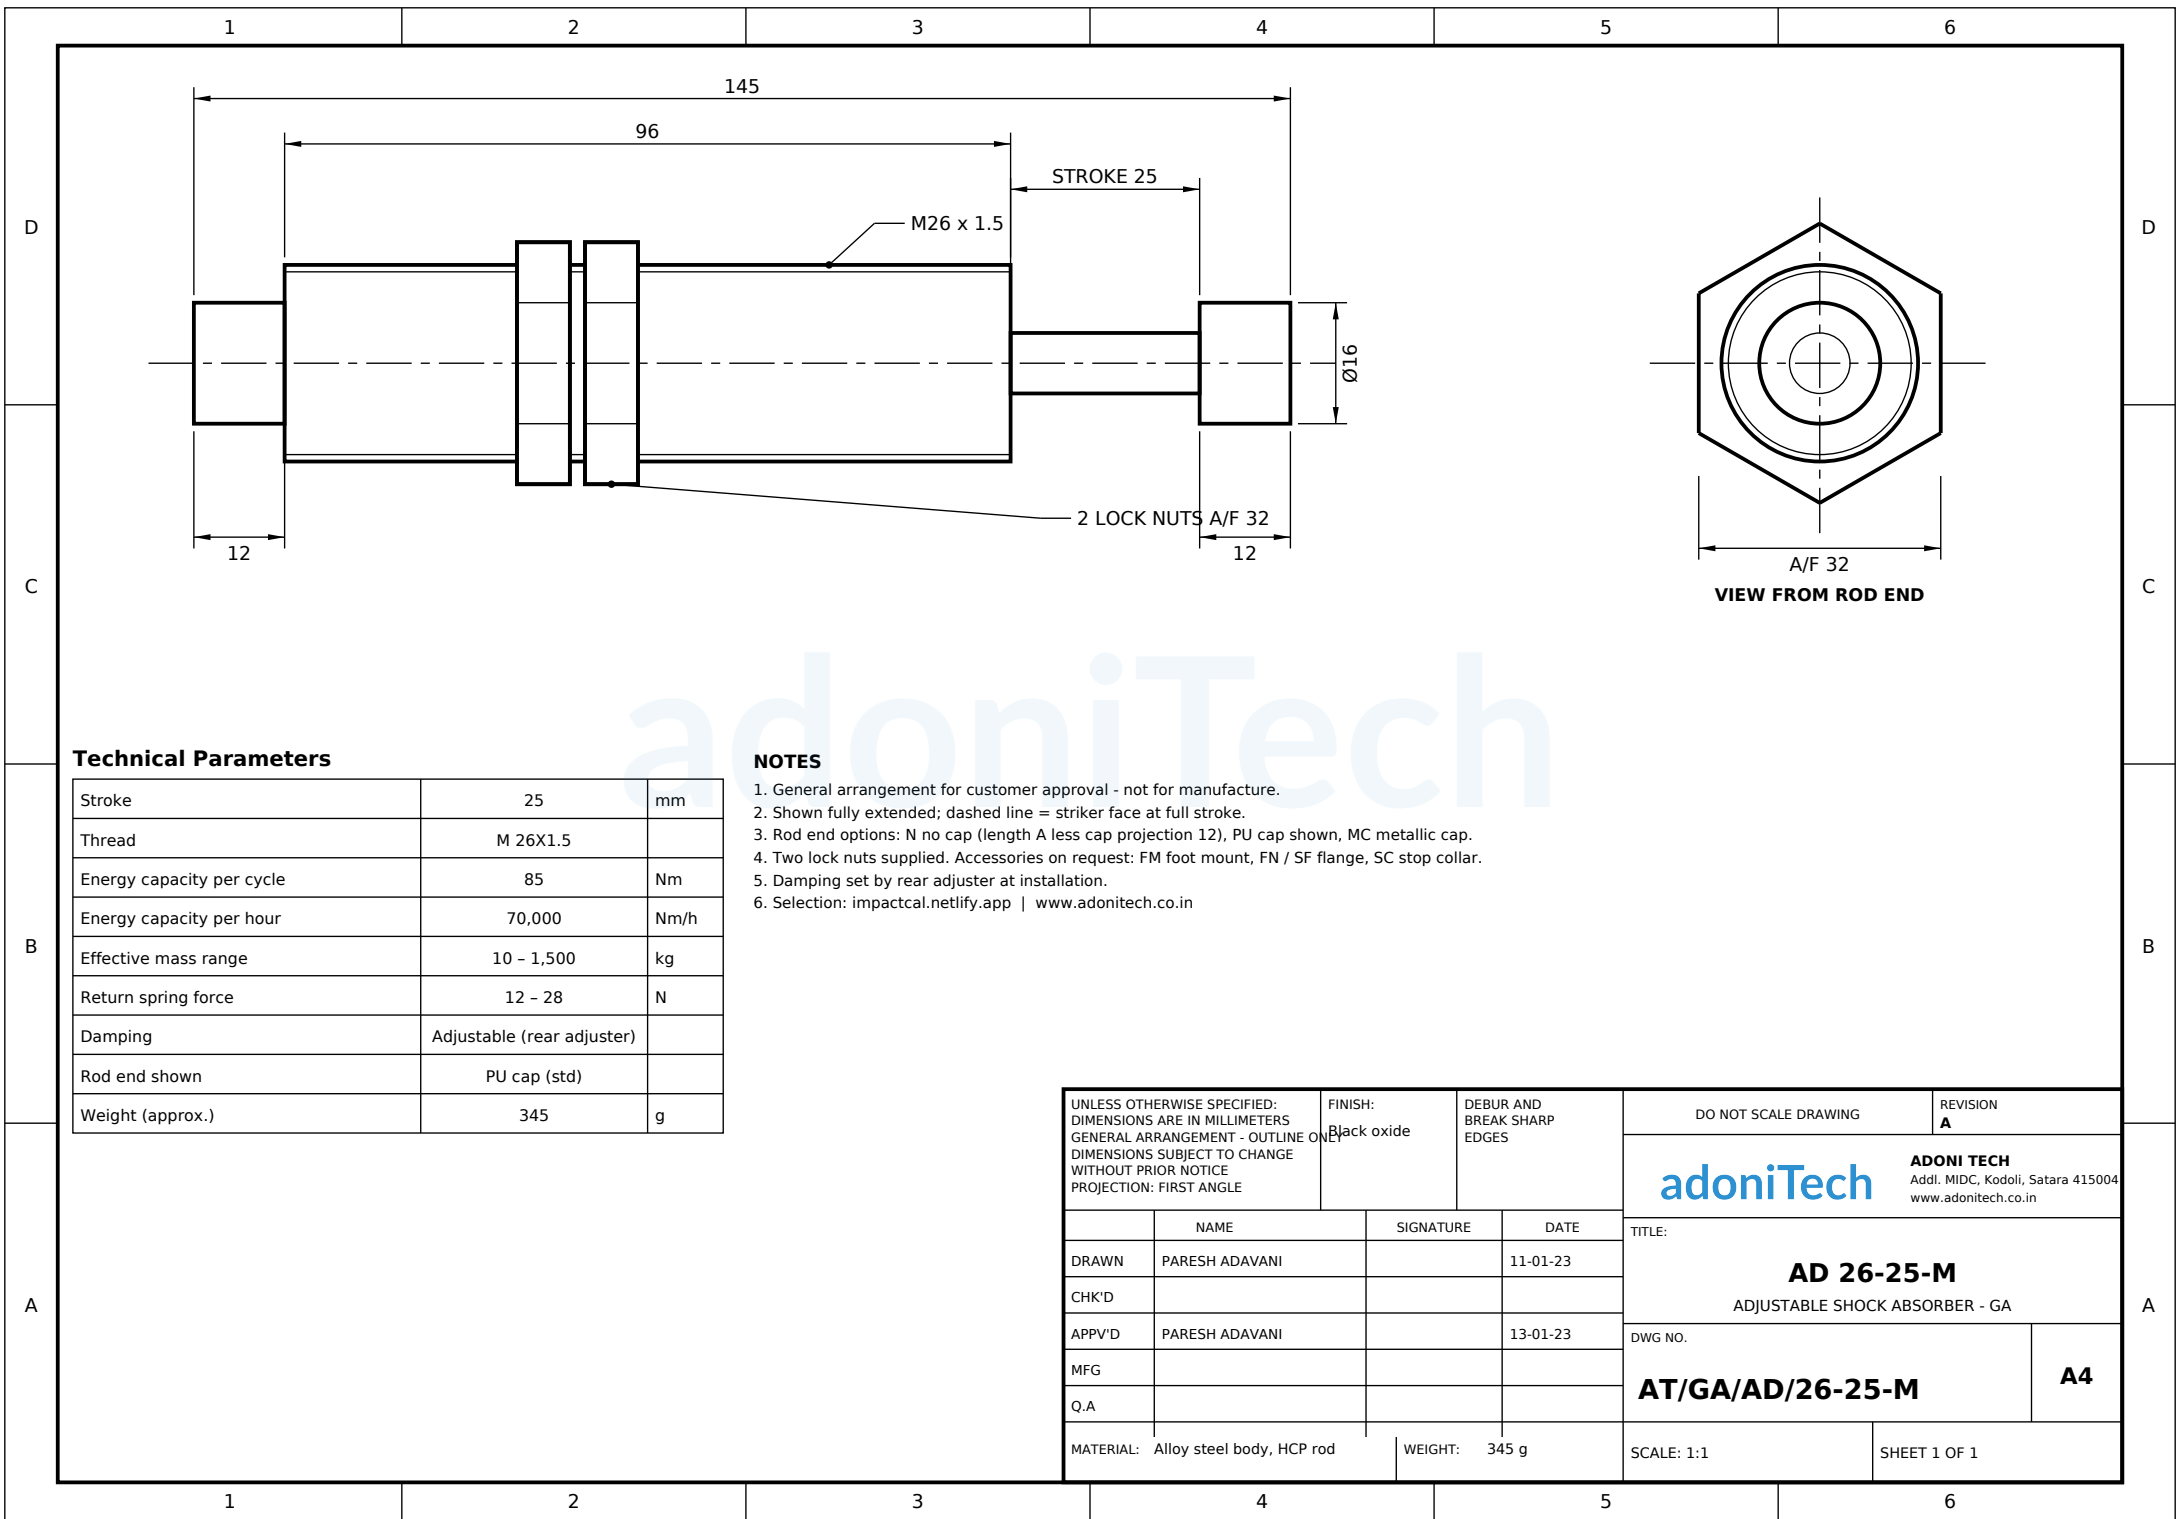

Technical Parameters

Stroke	25	mm
Thread	M 26X1.5	
Energy capacity per cycle	85	Nm
Energy capacity per hour	70,000	Nm/h
Effective mass range	10 - 1,500	kg
Return spring force	12 - 28	N
Damping	Adjustable (rear adjuster)	
Rod end shown	PU cap (std)	
Weight (approx.)	345	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 12), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Damping set by rear adjuster at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A	
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in			
	NAME		SIGNATURE		DATE		TITLE: AD 26-25-M ADJUSTABLE SHOCK ABSORBER - GA DWG NO. AT/GA/AD/26-25-M A4		
DRAWN	PARESH ADAVANI				11-01-23				
CHK'D									
APPV'D	PARESH ADAVANI				13-01-23				
MFG									
Q.A									
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 345 g			SCALE: 1:1		SHEET 1 OF 1	