
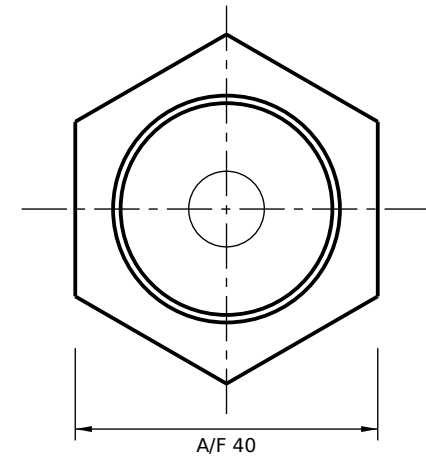


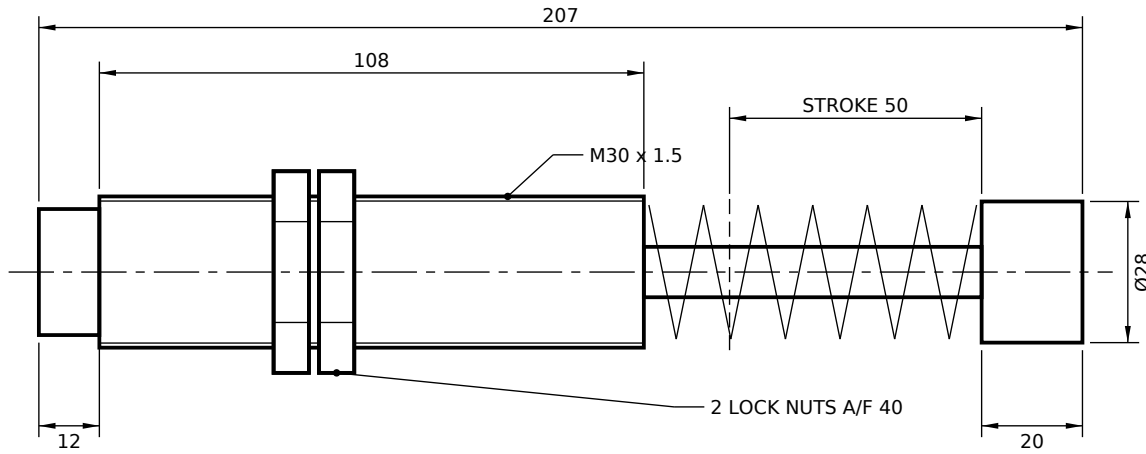

VIEW FROM ROD END (SCALE 1:1)

Technical Parameters

Stroke	50	mm
Thread	M 30X1.5	
Energy capacity per cycle	250	Nm
Energy capacity per hour	97,000	Nm/h
Effective mass range	13 - 2,700	kg
Return spring force	45 - 80	N
Damping	Adjustable (rear adjuster)	
Rod end shown	PU cap (std)	
Weight (approx.)	650	g

NOTES

- General arrangement for customer approval - not for manufacture.
- Shown fully extended; dashed line = striker face at full stroke.
- Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
- Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
- Damping set by rear adjuster at installation.
- Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE				FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A			
				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in						TITLE: AD 30-50-M ADJUSTABLE SHOCK ABSORBER - GA			
NAME		SIGNATURE										DATE	
DRAWN		PARESH ADAVANI										15-01-23	
CHK'D													
APPV'D		PARESH ADAVANI										17-01-23	
MFG													
Q.A								DWG NO.		A4			
AT/GA/AD/30-50-M													
MATERIAL: Alloy steel body, HCP rod				WEIGHT: 650 g				SCALE: 1:1.5		SHEET 1 OF 1			