
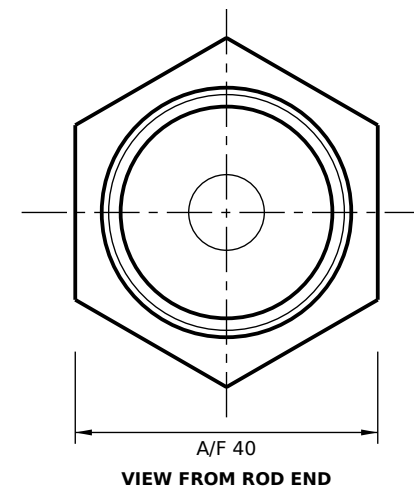


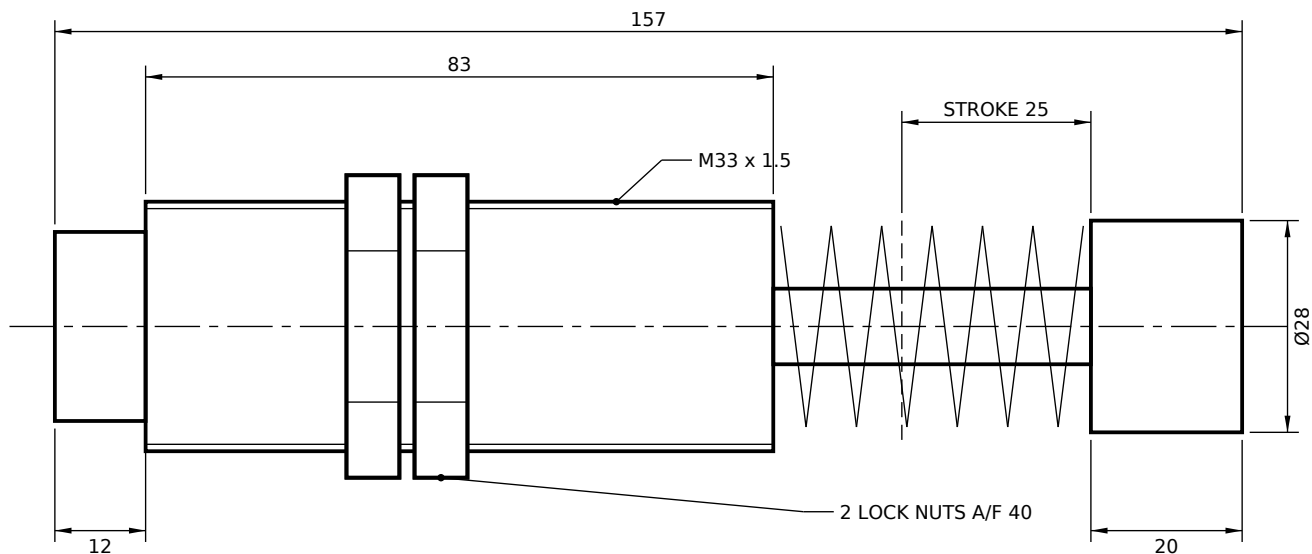

Technical Parameters

Stroke	25	mm
Thread	M 33X1.5	
Energy capacity per cycle	120	Nm
Energy capacity per hour	82,000	Nm/h
Effective mass range	10 - 1,800	kg
Return spring force	40 - 70	N
Damping	Adjustable (rear adjuster)	
Rod end shown	PU cap (std)	
Weight (approx.)	640	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Damping set by rear adjuster at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
						adoniTech		ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in		
	NAME		SIGNATURE		DATE		TITLE:			
DRAWN	PARESH ADAVANI				17-01-23		AD 33-25-M ADJUSTABLE SHOCK ABSORBER - GA			
CHK'D										
APPV'D	PARESH ADAVANI				19-01-23		DWG NO.			
MFG							AT/GA/AD/33-25-M			A4
Q.A										
MATERIAL: Alloy steel body, HCP rod			WEIGHT: 640 g			SCALE: 1:1			SHEET 1 OF 1	