
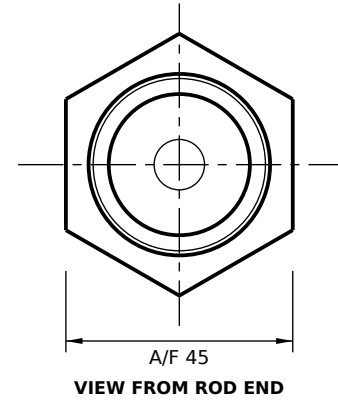


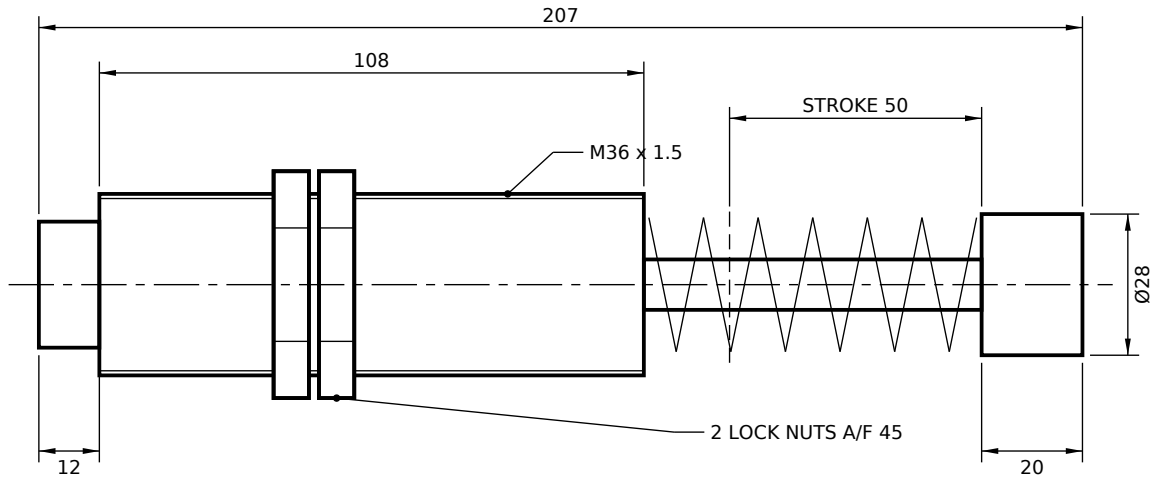

Technical Parameters

Stroke	50	mm
Thread	M 36X1.5	
Energy capacity per cycle	250	Nm
Energy capacity per hour	97,000	Nm/h
Effective mass range	13 - 2,700	kg
Return spring force	45 - 80	N
Damping	Adjustable (rear adjuster)	
Rod end shown	PU cap (std)	
Weight (approx.)	655	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Damping set by rear adjuster at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE				FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A							
				adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in						TITLE: AD 36-50-M ADJUSTABLE SHOCK ABSORBER - GA		DWG NO. AT/GA/AD/36-50-M		A4			
NAME		SIGNATURE														DATE	
DRAWN		PARESH ADAVANI														23-01-23	
CHK'D																	
APPV'D		PARESH ADAVANI										25-01-23					
MFG																	
Q.A																	
MATERIAL: Alloy steel body, HCP rod										WEIGHT: 655 g		SCALE: 1:1.5				SHEET 1 OF 1	