
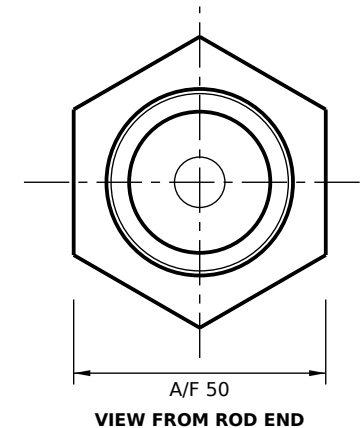


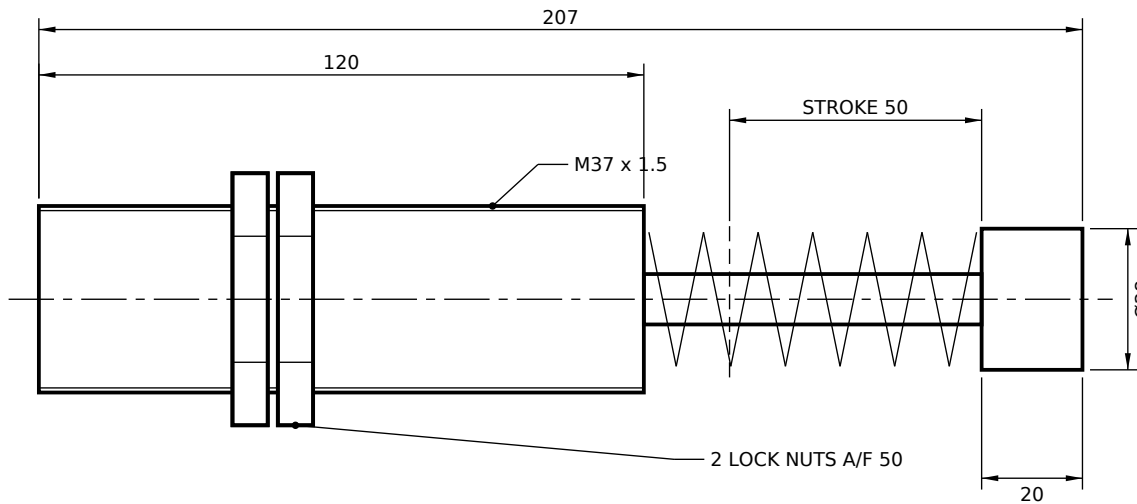

Technical Parameters

Stroke	50	mm
Thread	M 37X1.5	
Energy capacity per cycle	250	Nm
Energy capacity per hour	97,000	Nm/h
Effective mass range	13 - 2,700	kg
Return spring force	45 - 80	N
Damping	Adjustable	
Rod end shown	PU cap (std)	
Weight (approx.)	660	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Damping adjustable at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A		
						adoniTech ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in TITLE: AD 37-50-M ADJUSTABLE SHOCK ABSORBER - GA DWG NO. AT/GA/AD/37-50-M A4				
	NAME		SIGNATURE		DATE					
DRAWN	PARESH ADAVANI				27-01-23					
CHK'D										
APPV'D	PARESH ADAVANI				29-01-23					
MFG										
Q.A										
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 660 g		SCALE: 1:1.5						SHEET 1 OF 1