
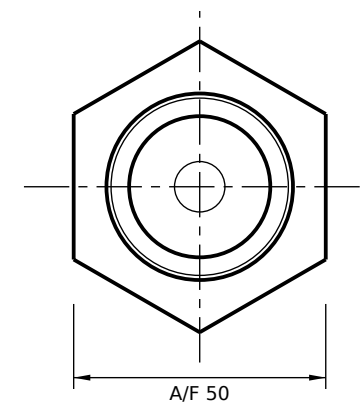


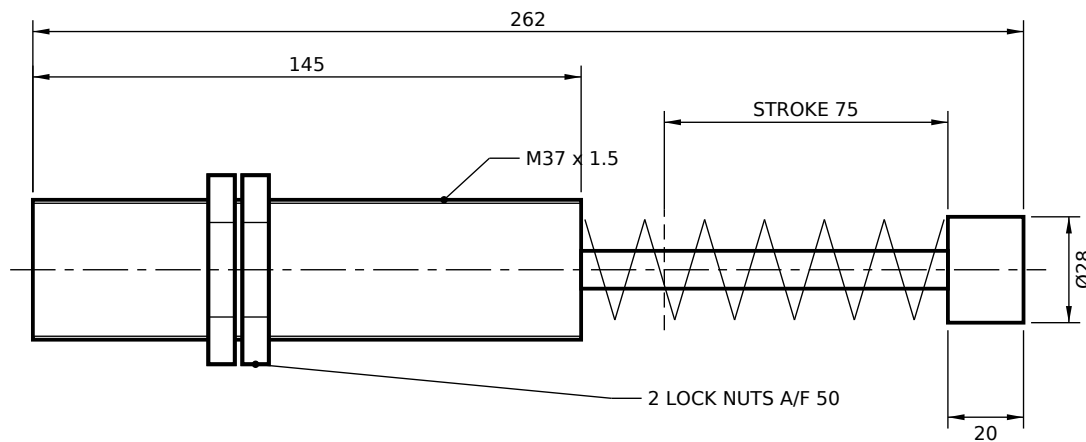

VIEW FROM ROD END (SCALE 1:1.5)

Technical Parameters

Stroke	75	mm
Thread	M 37X1.5	
Energy capacity per cycle	380	Nm
Energy capacity per hour	120,000	Nm/h
Effective mass range	13 - 2,700	kg
Return spring force	45 - 80	N
Damping	Adjustable	
Rod end shown	PU cap (std)	
Weight (approx.)	680	g

NOTES

1. General arrangement for customer approval - not for manufacture.
2. Shown fully extended; dashed line = striker face at full stroke.
3. Rod end options: N no cap (length A less cap projection 20), PU cap shown, MC metallic cap.
4. Two lock nuts supplied. Accessories on request: FM foot mount, FN / SF flange, SC stop collar.
5. Damping adjustable at installation.
6. Selection: impactcal.netlify.app | www.adonitech.co.in

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS GENERAL ARRANGEMENT - OUTLINE ONLY DIMENSIONS SUBJECT TO CHANGE WITHOUT PRIOR NOTICE PROJECTION: FIRST ANGLE		FINISH: Black oxide		DEBUR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION A				
		adoniTech						ADONI TECH Addl. MIDC, Kodoli, Satara 415004 www.adonitech.co.in				
	NAME		SIGNATURE		DATE		TITLE: AD 37-75-M ADJUSTABLE SHOCK ABSORBER - GA					
DRAWN	PARESH ADAVANI				29-01-23							
CHK'D												
APPV'D	PARESH ADAVANI				31-01-23							
MFG												
Q.A							DWG NO.		AT/GA/AD/37-75-M		A4	
MATERIAL: Alloy steel body, HCP rod		WEIGHT: 680 g		SCALE: 1:2				SHEET 1 OF 1				